

jaga

CLIMATE DESIGNERS

Heating 

MINI WALL kr. 2024.DK



jaga

CLIMATE DESIGNERS

MINI WALL

Strikingly discrete

- Extremely suited to spaces with large windows and for dwarf walls under window seats.
- Heights from 8cm
- Beautiful in combination with the free-standing Mini for glazed façades.
- Stable one-piece casing.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as freestanding model for glazed façades. See page 136.

MINI WALL sandblast grey (001)





MINI WALL




MINI WALL MOUNTED MODEL




DIMENSIONS (in cm)


HEIGHT 008 (opposite end connections)

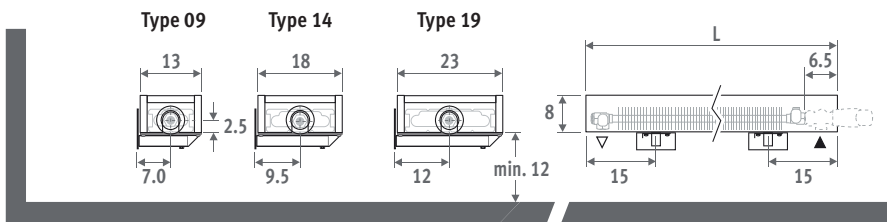

HEIGHT 013

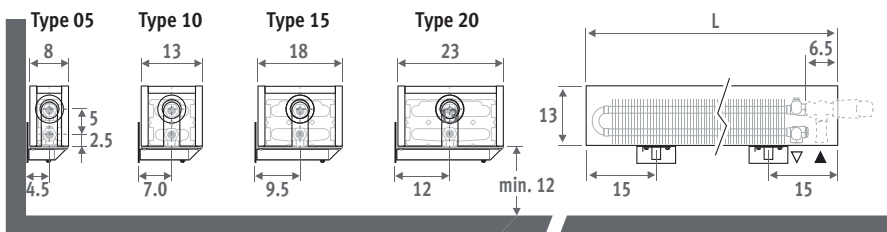


HEIGHT 023 / 028

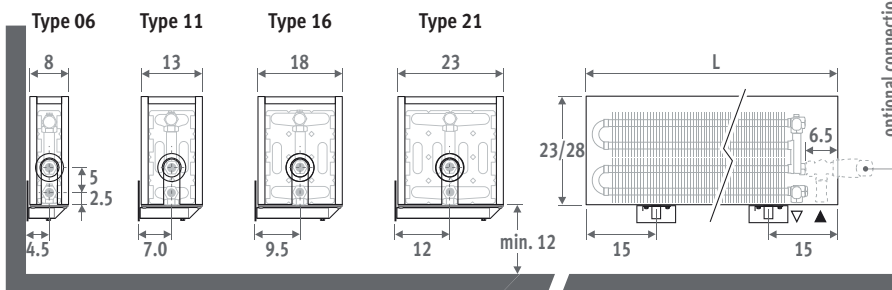

Also available as freestanding model for glazed façades. See page 136.

ORDERING CODE

code	height	length	type	colour
MINW .	008	060	09 .	XXX
<i>fill in colour code ↓</i>				

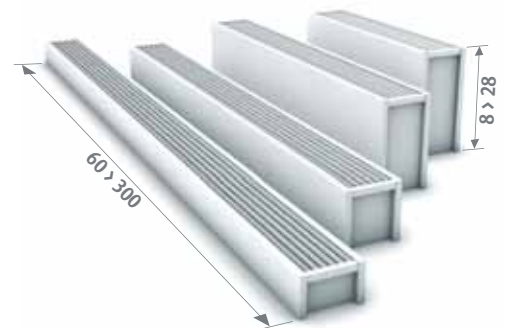

DELIVERY

- Easy to install by one person.
- Standard delivery:
 - Low-H₂O heat exchanger, air vent 1/8" and drain plug 1/2"
 - casing in one piece for connection left or right
 - wall brackets in the same colour as the casing

COLOURS

- Environmentally friendly, scratch-resistant, high UV resistant powder coating.
- Standard colours:
- traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
 - sandblast grey (001), fine texture metallic lacquer
 - off-black RAL 7021 (145) Soft touch: finely-textured matte look, gloss degree < 10%
- Other colours: see colour chart.

CONNECTION

Standard connection:
 Height 008: opposite end connection, flow left or right
 Other heights: same end connection, left or right connection.



It is not possible to connect to the wall from inside the casing, as the casing includes a closed rear panel.

CONNECTION SETS

Mini height 013/023/028


Connection to the floor:
 use set 104 (see page 318)

Connection to the wall:
 Jaga H-valve for one or two pipe
 TRV head and sleeve couplings Eurocone 3/4" included.

Mini height 008

Connection to the floor:
 use set 222 (see page 325).

Connection to the wall:
 use set 25 (see page 3328) and
 1 angle 90° M24xM24 (see page 334).

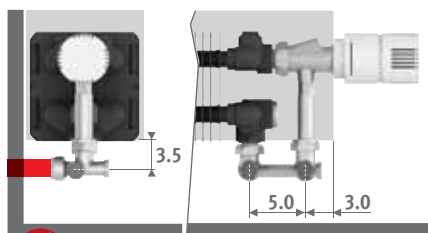

set 103	CODE 1-PIPE/2-PIPE	Kr.
	COLO.HBSW.AW.4...	758
	COLO.HBSW.JW.4...	825
<i>fill in sleeve coupling code</i>		
	Precision metal tube 15/1	115
	Precision metal tube 16/1	116
	RPE/ALU tube 16/2	616
	RPE/ALU tube 20/2	620

Other connections:

See chapter "Connection sets and valves Low-H₂O" for all connection options and technical information

NOTES

NOTES

MILTON
MEGATHERM

MILTON MEGATHERM A/S

Formervangen 14-16
DK - 2600 Glostrup

Tel: +45 4697 0000
Fax: +45 4697 0001

info@miltonmegatherm.dk
www.miltonmegatherm.dk

jaga
CLIMATE
DESIGNERS

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12
Fax: +32 (0)11 29 41 60
export@jaga.com

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in line
with our policy of continuous improvement and innovation.
All prices in DKK, exclude VAT. Prices valid from January 1, 2024.
Replaces all existing price lists.