


jaga

CLIMATE DESIGNERS

Heating 

TEMPO FREESTANDING kr. 2023.DK

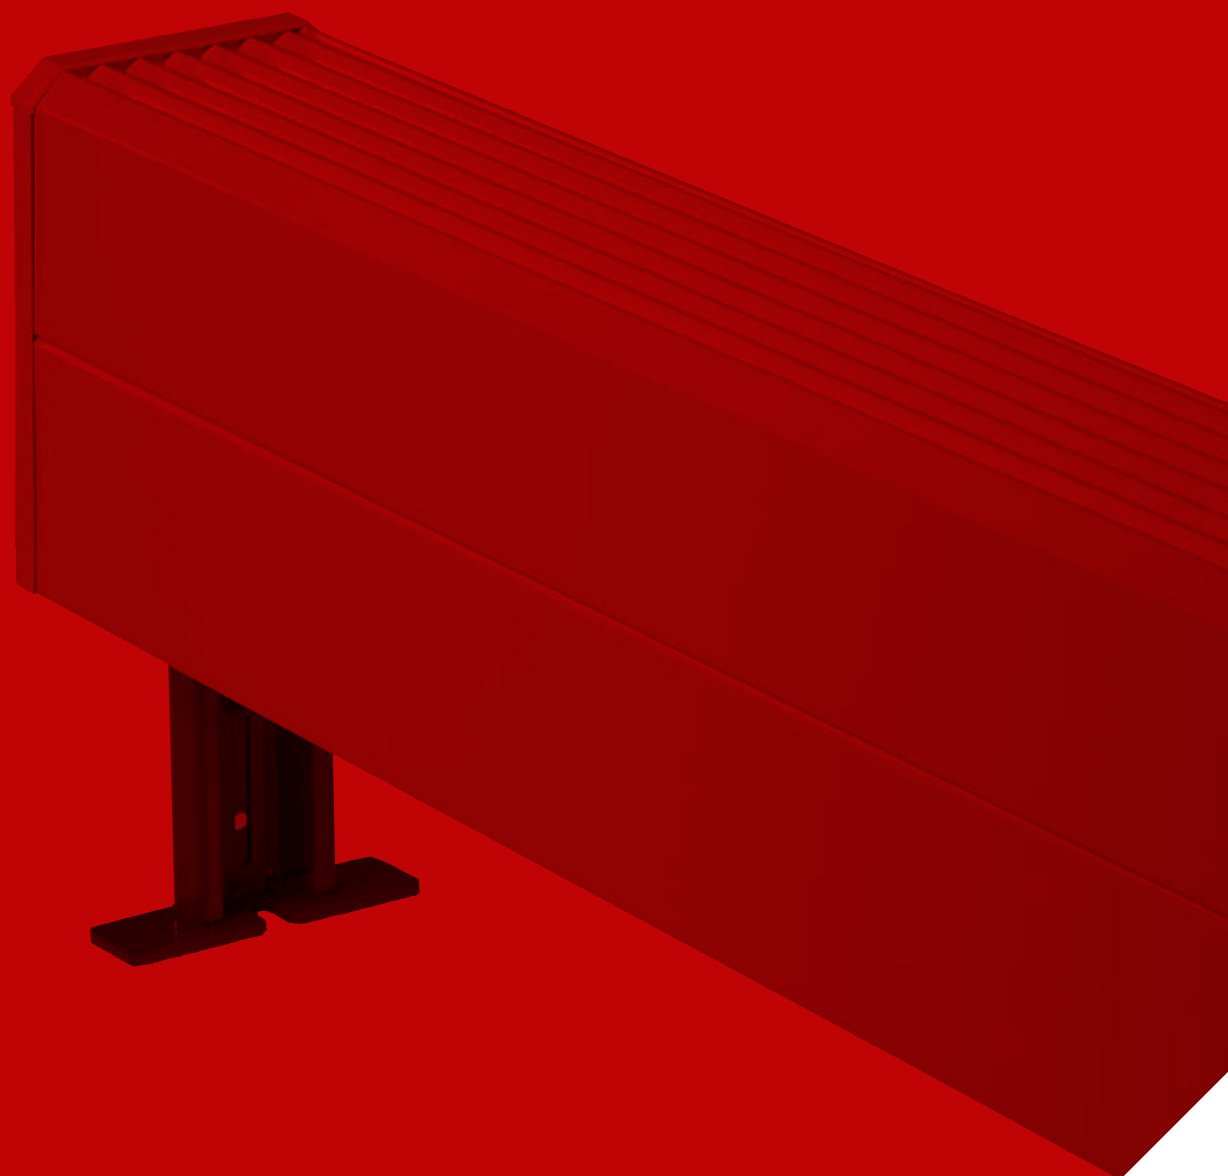

jaga

CLIMATE DESIGNERS

TEMPO FREESTANDING

Warm power, simple style

- The Jaga classic for rooms with glazed façades. Efficient, freestanding Low H₂O technology.
- No wasteful heat loss from radiation through glazing.
- Light, compact and easy to handle packaging.
- Suitable for integrated valve.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as a wall mounted model.
See page 46.

TEMPO FREESTANDING white 101 (RAL 9010)





TEMPO FREESTANDING


TEMPO FREESTANDING

EN 442




DIMENSIONS (in cm)

HEIGHT 020

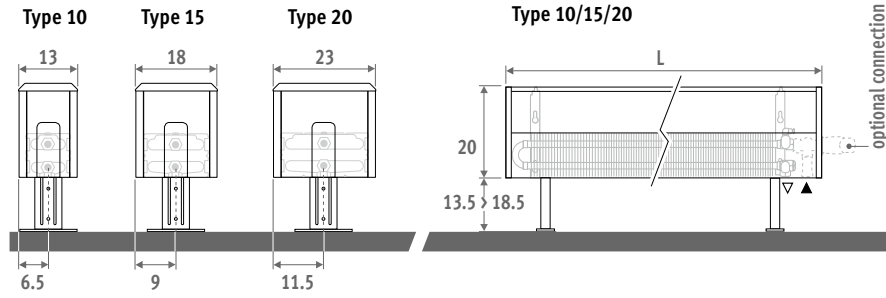


Also available as a wall mounted model. See page 46.


HEIGHT 030

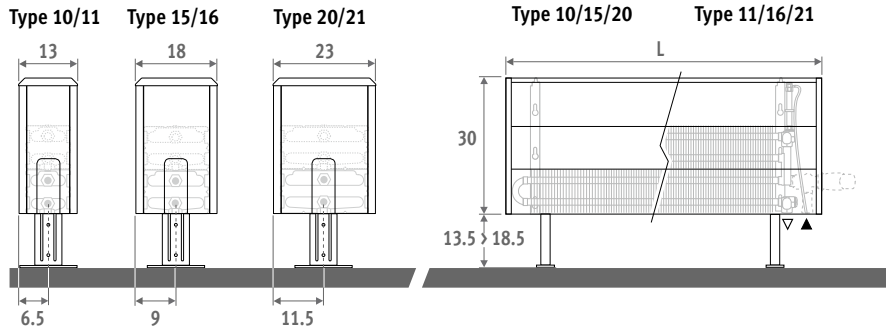

HEIGHT 040

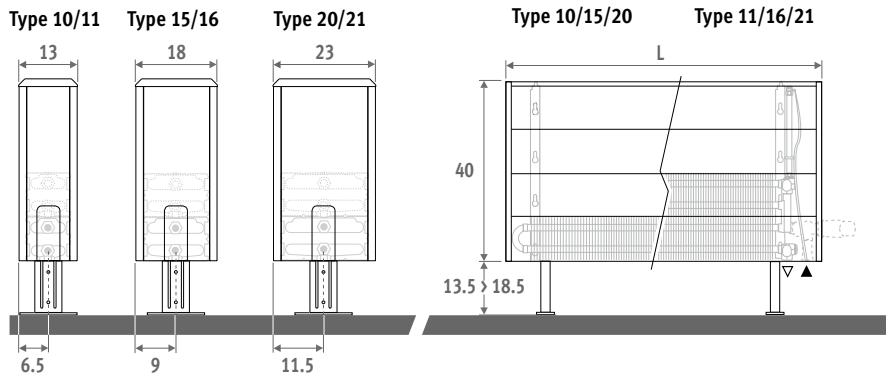

HEIGHT 050

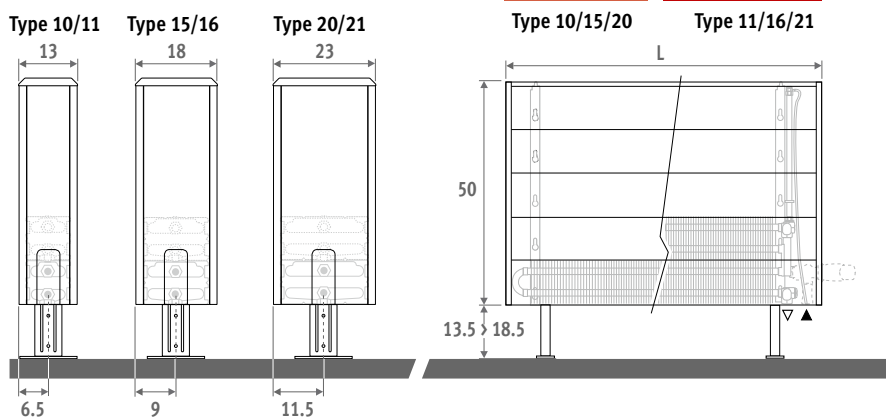

TEMPO FREESTANDING

DELIVERY

Light and easily installed by one person. Delivered flat packed in 2 packages for ease of handling and storage.

standard delivery:

- Low-H₂O heat exchanger with air vent elbow (standard) or extended air vent (twin) 1/8" and drain plug 1/2"
- easy to mount casing with one closed side panel and one open panel for TRV head. The side panels can be mounted both left or right.
- standard adjustable feet in neutral grey

COLOUR

Scratch-resistant surface coating with a soft structured, satin gloss finish. High UV resistance.

Standard colour: white RAL 9010 (101)

CONNECTION

Standard connection: bottom end left or right



OPTIONS

Feet in the same colour as the casing

For feet in the same colour as the casing, repeat the colour code after the code of the radiator.


Ex.: TEMF.HHH LLL TT.101/101

Surcharge		Kr.
Length casing		
040 > 120	2 feet	158
140 > 220	3 feet	248
240 > 300	4 feet	330

Extended adjustable feet

- For installation on a rough subfloor or computer floor.
- For extended feet in neutral grey, add /AL to the ordering code.
- Ex.: TEMF.020 040 10.101/AL
- For extended feet in the same colour as the casing, add /AL to the ordering code and repeat the colour code.
- Ex.: TEMF.020 040 10.101/AL/101

Surcharge		Kr.	Kr.
Length casing		grey	colour
040 > 120	2 feet	62	225
140 > 220	3 feet	93	330
240 > 300	4 feet	116	443

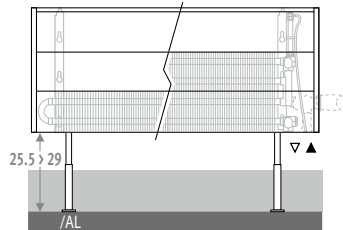


ORDERING CODE

code	height	length	type	colour
TEMF .	020	040	10 .	XXX
<i>fill in colour code</i>				

CONNECTION SETS

Jaga H-valve to the floor for one or two pipe

TRV head and sleeve couplings Eurocone 3/4" included.

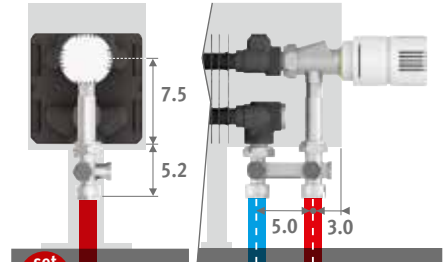

set 104	CODE	1-PIPE/2-PIPE	Kr.
	COLO.HBSF.AW.4...		728
	COLO.HBSF.JW.4...		795
<i>fill in sleeve coupling code</i>			
	Precision metal tube 15/1		115
	Precision metal tube 16/1		116
	RPE/ALU tube 16/2		616
	RPE/ALU tube 20/2		620

Other connection sets and sleeve couplings

See chapter "Connection sets and valves Low-H₂O" for all connection options and technical information



TEMPO FREESTANDING

TEMF.HHH LLL TT.101

	STANDARD			
	Type	Watts 75/65	Watts 55/45	Kr.
L	H 020			
040	10	262	126	1605
	15	436	211	1830
	20	613	296	2070
050	10	328	158	1718
	15	545	263	1965
	20	766	370	2228
060	10	393	189	1823
	15	654	316	2130
	20	919	444	2423
070	10	459	221	2048
	15	763	369	2408
	20	1072	518	2790
080	10	524	252	2153
	15	872	421	2550
	20	1226	592	2978
090	10	590	284	2265
	15	981	474	2723
	20	1379	666	3173
100	10	655	316	2483
	15	1090	526	2970
	20	1532	740	3480
110	10	721	347	2588
	15	1199	579	3158
	20	1685	814	3705
120	10	786	379	2708
	15	1308	632	3293
	20	1838	888	3893
140	10	917	442	3173
	15	1526	737	3855
	20	2145	1036	4763
160	10	1048	505	3593
	15	1744	842	4433
	20	2451	1184	5513
180	10	1179	568	3870
	15	1962	948	4793
	20	2758	1332	5955
200	10	1310	631	4170
	15	2180	1053	5408
	20	3064	1480	6450
220	10	1441	694	4673
	15	2398	1158	6098
	20	3370	1628	7335
240	10	1572	757	5153
	15	2616	1264	6683
	20	3677	1776	8018
260	10	1703	820	5423
	15	2834	1369	7065
	20	3983	1924	8513
280	10	1834	884	5783
	15	3052	1474	7545
	20	4290	2072	9068
300	10	1965	947	6060
	15	3270	1579	7890
	20	4596	2220	9510

	STANDARD			
	Type	Watts 75/65	Watts 55/45	Kr.
H 030	10	330	160	1748
	15	544	264	1965
	20	762	370	2198
	10	413	200	1853
	15	680	330	2130
	20	953	463	2393
	10	496	240	1980
	15	815	396	2280
	20	1144	556	2573
	10	578	280	2228
	15	951	462	2573
	20	1334	648	2970
	10	661	320	2355
	15	1087	528	2745
	20	1525	741	3173
	10	743	360	2498
	15	1223	594	2940
	20	1715	834	3398
	10	826	400	2715
	15	1359	660	3195
	20	1906	926	3735
	10	909	440	2858
	15	1495	727	3413
	20	2097	1019	3975
	10	991	480	2978
	15	1631	793	3563
	20	2287	1112	4170
	10	1156	560	3510
	15	1903	925	4178
	20	2668	1297	5078
	10	1322	640	3975
	15	2174	1057	4793
	20	3050	1482	5873
	10	1487	720	4268
	15	2446	1189	5183
	20	3431	1668	6368
	10	1652	800	4620
	15	2718	1321	5858
	20	3812	1853	6908
	10	1817	880	5160
	15	2990	1453	6578
	20	4193	2038	7823
	10	1982	960	5685
	15	3262	1585	7215
	20	4574	2223	8535
	10	2148	1040	5993
	15	3533	1717	7628
	20	4956	2409	9068
	10	2313	1120	6398
	15	3805	1849	8145
	20	5337	2594	9668
	10	2478	1200	6690
	15	4077	1981	8520
	20	5718	2779	10140

	TWIN			
	Type	Watts 75/65	Watts 55/45	Kr.
	11	448	213	2528
	16	592	279	2873
	21	779	365	3030
	11	561	267	2715
	16	740	349	3120
	21	974	456	3300
	11	673	320	2873
	16	888	418	3360
	21	1169	547	3578
	11	785	373	3248
	16	1036	488	3848
	21	1364	639	4118
	11	897	426	3428
	16	1184	558	4080
	21	1558	730	4403
	11	1009	479	3615
	16	1332	628	4350
	21	1753	821	4710
	11	1121	533	3930
	16	1480	697	4770
	21	1948	912	5190
	11	1233	586	4148
	16	1628	767	5048
	21	2143	1003	5520
	11	1345	639	4328
	16	1776	837	5295
	21	2338	1095	5805
	11	1569	745	4980
	16	2072	976	6098
	21	2727	1277	7043
	11	1794	852	5693
	16	2368	1116	7080
	21	3117	1460	8213
	11	2018	959	6113
	16	2664	1255	7658
	21	3506	1642	8880
	11	2242	1065	6608
	16	2960	1395	8700
	21	3896	1824	9615
	11	2466	1172	7418
	16	3256	1534	9863
	21	4286	2007	10958
	11	2690	1278	8100
	16	3552	1674	10725
	21	4675	2189	11918
	11	2915	1385	8573
	16	3848	1813	11340
	21	5065	2372	12638
	11	3139	1491	9105
	16	4144	1953	12053
	21	5454	2554	13448
	11	3363	1598	9540
	16	4440	2092	12638
	21	5844	2736	14145

EN442 output at 20°C room temperature

TEMPO FREESTANDING

TEMF.HHH LLL TT.101

	STANDARD				TWIN			
	Type	Watts 75/65	Watts 55/45	Kr.	Type	Watts 75/65	Watts 55/45	Kr.
L	H 040							
040	10	385	187	1875	11	506	241	2663
	15	627	306	2138	16	680	320	3060
	20	878	429	2378	21	910	424	3195
050	10	482	234	1995	11	632	300	2843
	15	784	383	2288	16	850	400	3300
	20	1098	537	2558	21	1137	530	3473
060	10	578	281	2153	11	758	360	3045
	15	941	460	2490	16	1020	480	3555
	20	1318	645	2798	21	1364	636	3773
070	10	674	328	2415	11	885	421	3428
	15	1098	537	2813	16	1190	560	4050
	20	1537	752	3188	21	1592	742	4350
080	10	770	375	2535	11	1011	481	3615
	15	1254	613	2978	16	1360	639	4320
	20	1757	859	3405	21	1819	848	4650
090	10	867	422	2708	11	1138	541	3825
	15	1411	690	3173	16	1530	719	4598
	20	1976	966	3660	21	2047	954	4958
100	10	963	469	2955	11	1264	601	4170
	15	1568	766	3465	16	1700	799	5033
	20	2196	1074	4013	21	2274	1060	5468
110	10	1059	515	3120	11	1390	661	4395
	15	1725	843	3698	16	1870	879	5348
	20	2416	1182	4268	21	2501	1166	5820
120	10	1156	562	3240	11	1517	721	4575
	15	1882	920	3863	16	2040	959	5595
	20	2635	1289	4478	21	2729	1272	6105
140	10	1348	656	3825	11	1770	841	5310
	15	2195	1073	4538	16	2380	1119	6458
	20	3074	1503	5460	21	3184	1484	7418
160	10	1541	750	4320	11	2022	961	6045
	15	2509	1226	5183	16	2720	1279	7463
	20	3514	1718	6270	21	3638	1696	8603
180	10	1733	843	4658	11	2275	1081	6518
	15	2822	1379	5618	16	3060	1439	8093
	20	3953	1933	6803	21	4093	1908	9323
200	10	1926	937	5063	11	2528	1202	7035
	15	3136	1533	6345	16	3400	1599	9195
	20	4392	2148	7403	21	4548	2120	10110
220	10	2119	1031	5618	11	2781	1322	7898
	15	3450	1686	7095	16	3740	1759	10388
	20	4831	2363	8333	21	5003	2332	11468
240	10	2311	1124	6203	11	3034	1442	8618
	15	3763	1839	7778	16	4080	1918	11288
	20	5270	2577	9128	21	5458	2544	12495
260	10	2504	1218	6540	11	3286	1562	9120
	15	4077	1993	8228	16	4420	2078	11948
	20	5710	2792	9675	21	5912	2755	13253
280	10	2696	1312	7005	11	3539	1682	9720
	15	4390	2146	8790	16	4760	2238	12698
	20	6149	3007	10320	21	6367	2968	14115
300	10	2889	1406	7320	11	3792	1802	10163
	15	4704	2299	9203	16	5100	2398	13328
	20	6588	3222	10838	21	6822	3180	14835

	STANDARD				TWIN			
	Type	Watts 75/65	Watts 55/45	Kr.	Type	Watts 75/65	Watts 55/45	Kr.
H 050								
10	430	210	2033	11	554	263	2820	
15	694	341	2303	16	759	356	3225	
20	970	477	2550	21	1033	479	3390	
10	538	263	2168	11	693	330	3008	
15	867	426	2475	16	949	445	3465	
20	1213	597	2760	21	1291	599	3675	
10	646	316	2333	11	832	396	3225	
15	1040	511	2678	16	1139	534	3750	
20	1455	716	3015	21	1549	719	4005	
10	753	368	2625	11	970	461	3630	
15	1214	597	3023	16	1329	624	4268	
20	1698	835	3428	21	1807	839	4575	
10	861	421	2760	11	1109	527	3825	
15	1387	682	3195	16	1518	712	4538	
20	1940	954	3660	21	2066	959	4890	
10	968	473	2940	11	1247	593	4050	
15	1561	768	3420	16	1708	801	4845	
20	2183	1074	3908	21	2324	1079	5235	
10	1076	526	3188	11	1386	659	4425	
15	1734	853	3735	16	1898	891	5295	
20	2425	1193	4305	21	2582	1198	5753	
10	1184	579	3390	11	1525	725	4673	
15	1907	938	3998	16	2088	980	5625	
20	2668	1312	4568	21	2840	1318	6113	
10	1291	631	3518	11	1663	791	4868	
15	2081	1023	4155	16	2278	1069	5895	
20	2910	1431	4785	21	3098	1438	6420	
10	1506	736	4170	11	1940	923	5648	
15	2428	1194	4905	16	2657	1247	6840	
20	3395	1670	5835	21	3615	1678	7800	
10	1722	842	4680	11	2218	1055	6413	
15	2774	1364	5573	16	3037	1425	7875	
20	3880	1908	6690	21	4131	1917	9030	
10	1937	947	5070	11	2495	1187	6923	
15	3121	1535	6053	16	3416	1603	8528	
20	4365	2147	7260	21	4648	2157	9773	
10	2152	1052	5520	11	2772	1318	7500	
15	3468	1706	6833	16	3796	1781	9668	
20	4850	2385	7905	21	5164	2397	10620	
10	2367	1157	6105	11	3049	1450	8385	
15	3815	1876	7605	16	4176	1959	10883	
20	5335	2624	8880	21	5680	2636	12008	
10	2582	1262	6728	11	3326	1582	9165	
15	4162	2047	8348	16	4555	2137	11858	
20	5820	2862	9720	21	6197	2876	13080	
10	2798	1368	7110	11	3604	1714	9698	
15	4508	2217	8820	16	4935	2316	12540	
20	6305	3101	10298	21	6713	3116	13868	
10	3013	1473	7613	11	3881	1846	10328	
15	4855	2388	9428	16	5314	2493	13350	
20	6790	3339	11003	21	7230	3356	14783	
10	3228	1578	7973	11	4158	1977	10815	
15	5202	2558	9870	16	5694	2672	14003	
20	7275	3578	11558	21	7746	3595	15540	

EN442 output at 20°C room temperature

MILTON

MEGATHERM

MILTON MEGATHERM A/S

Formervangen 14-16
DK - 2600 Glostrup

Tel: +45 4697 0000
Fax: +45 4697 0001

info@miltonmegatherm.dk
www.miltonmegatherm.dk

jaga
CLIMATE
DESIGNERS

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12
Fax: +32 (0)11 29 41 60
export@jaga.com

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in line
with our policy of continuous improvement and innovation.
All prices in DKK, exclude VAT. Prices valid from January 1, 2023.
Replaces all existing price lists.