


jaga

CLIMATE DESIGNERS

Heating 

TEMPO FREESTANDING kr. 2024.DK

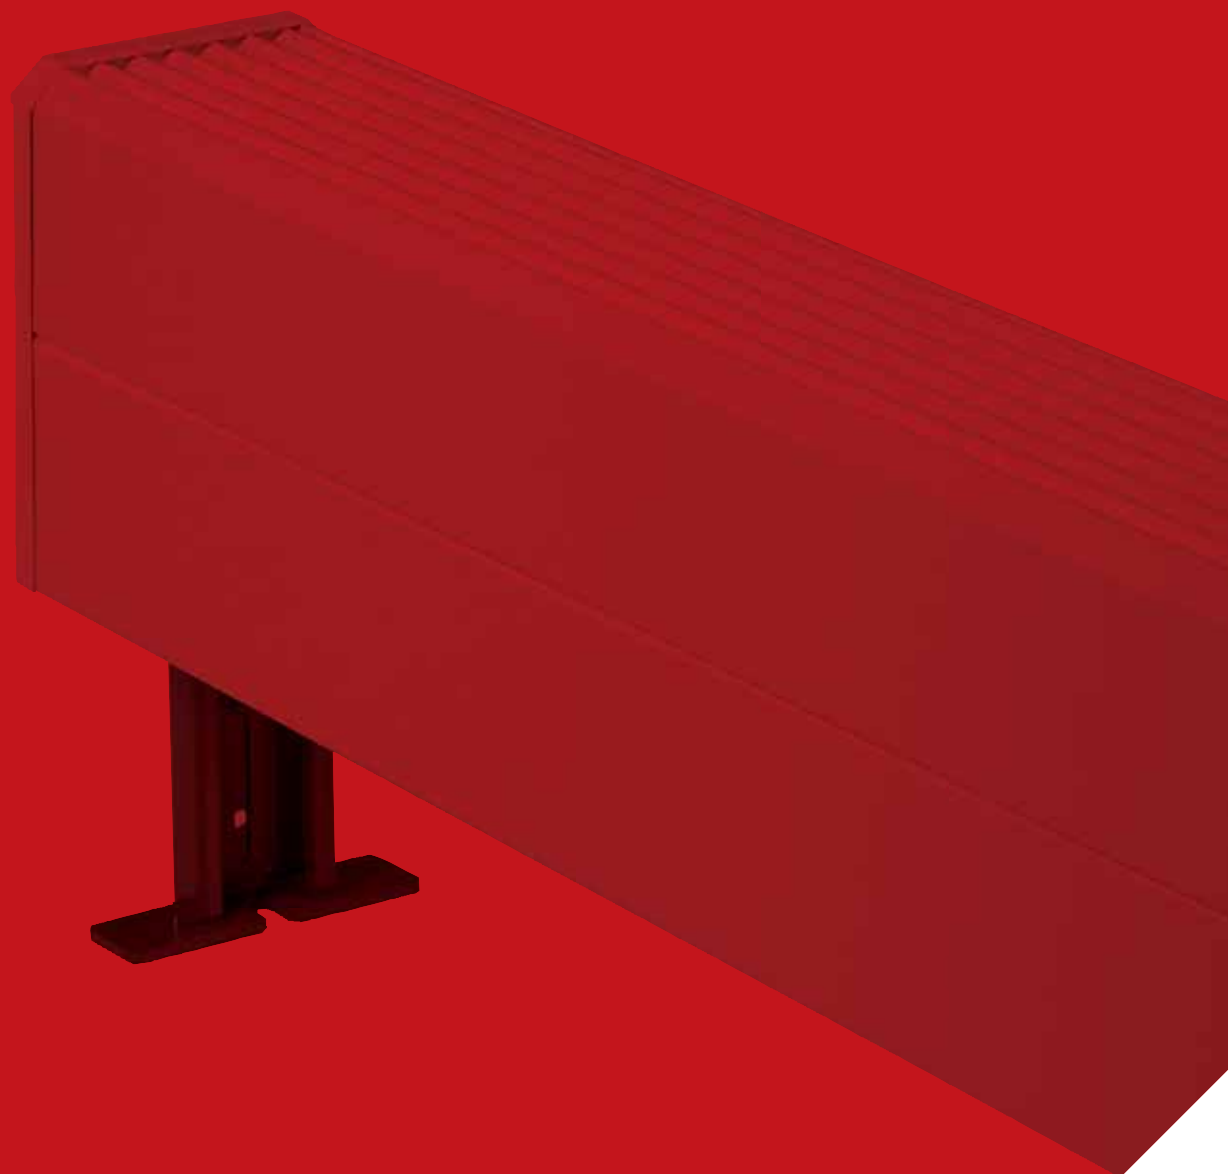

jaga

CLIMATE DESIGNERS

TEMPO FREESTANDING

Warm power, simple style

- The Jaga classic for rooms with glazed façades. Efficient, freestanding Low H₂O technology.
- No wasteful heat loss from radiation through glazing.
- Light, compact and easy to handle packaging.
- Suitable for integrated valve.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as a wall mounted model.
See page 46.

TEMPO FREESTANDING white 101 (RAL 9010)





TEMPO FREESTANDING


TEMPO FREESTANDING

EN 442




DIMENSIONS (in cm)

HEIGHT 020

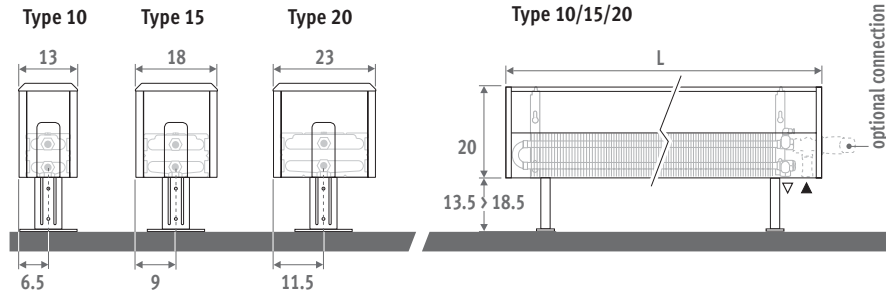


Also available as a wall mounted model. See page 46.


HEIGHT 030

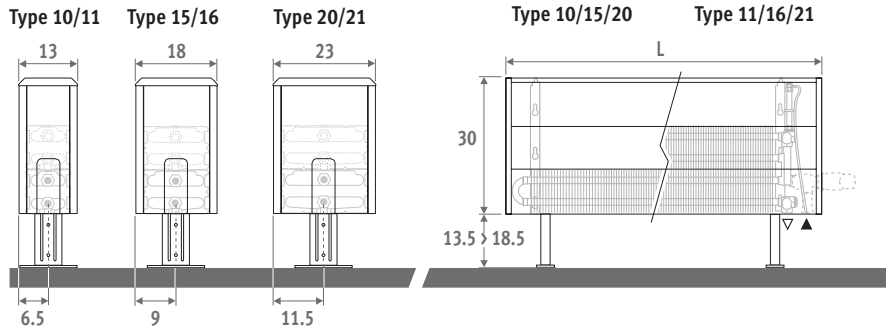

HEIGHT 040

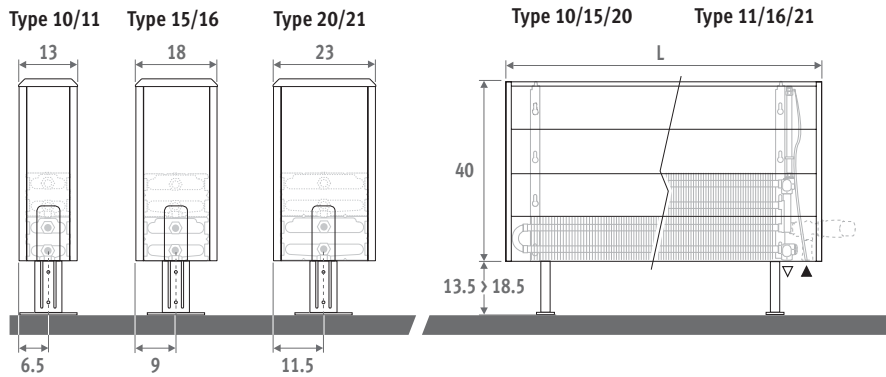

HEIGHT 050

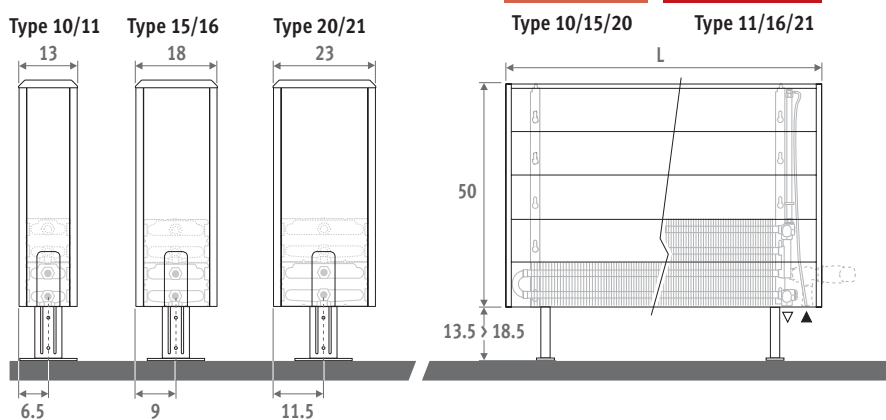

TEMPO FREESTANDING

DELIVERY

Light and easily installed by one person. Delivered flat packed in 2 packages for ease of handling and storage.

standard delivery:

- Low-H₂O heat exchanger with air vent elbow (standard) or extended air vent (twin) 1/8" and drain plug 1/2"
- easy to mount casing with one closed side panel and one open panel for TRV head. The side panels can be mounted both left or right.
- standard adjustable feet in neutral grey


COLOUR

Scratch-resistant surface coating with a soft structured, satin gloss finish. High UV resistance.

Standard colour: white RAL 9010 (101)

CONNECTION

Standard connection: bottom end left or right

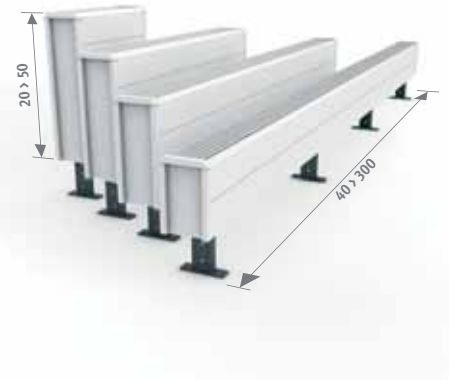

OPTIONS

Feet in the same colour as the casing

For feet in the same colour as the casing, repeat the colour code after the code of the radiator.


Ex.: TEMF.HHH.LLL.TT.101/101

Surcharge		Kr.
Length casing		
040 > 120	2 feet	165
140 > 220	3 feet	255
240 > 300	4 feet	345

Extended adjustable feet

- For installation on a rough subfloor or computer floor.
- For extended feet in neutral grey, add /AL to the ordering code.
Ex.: TEMF.020.040.10.101/AL
- For extended feet in the same colour as the casing, add /AL to the ordering code and repeat the colour code.
Ex.: TEMF.020.040.10.101/AL/101

Surcharge		Kr.	Kr.
Length casing		grey	colour
040 > 120	2 feet	64	233
140 > 220	3 feet	97	345
240 > 300	4 feet	121	458

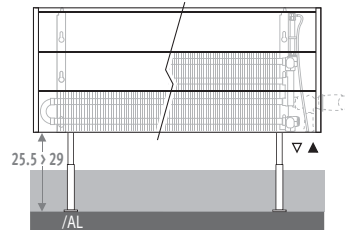


ORDERING CODE



code	height	length	type	colour
TEMF	020	040	10	XXX
fill in colour code				

CONNECTION SETS

Jaga H-valve to the floor for one or two pipe

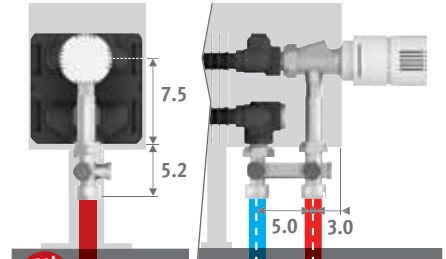TRV head and sleeve couplings Eurocone 3/4" included.



CODE	1-PIPE/2-PIPE	Kr.
	COLO.HBSF.AW.4...	758
	COLO.HBSF.JW.4...	825
fill in sleeve coupling code		
	Precision metal tube 15/1	115
	Precision metal tube 16/1	116
	RPE/ALU tube 16/2	616
	RPE/ALU tube 20/2	620

Other connection sets and sleeve couplings

See chapter "Connection sets and valves Low-H₂O" for all connection options and technical information



TEMPO FREESTANDING

TEMF.HHH LLL TT.101

	STANDARD			
	Type	Watts 75/65	Watts 55/45	Kr.
L	H 020			
040	10	262	126	1665
	15	436	211	1898
	20	613	296	2145
050	10	328	158	1785
	15	545	263	2040
	20	766	370	2310
060	10	393	189	1890
	15	654	316	2213
	20	919	444	2513
070	10	459	221	2123
	15	763	369	2498
	20	1072	518	2895
080	10	524	252	2235
	15	872	421	2648
	20	1226	592	3090
090	10	590	284	2348
	15	981	474	2828
	20	1379	666	3293
100	10	655	316	2573
	15	1090	526	3083
	20	1532	740	3608
110	10	721	347	2685
	15	1199	579	3278
	20	1685	814	3848
120	10	786	379	2813
	15	1308	632	3413
	20	1838	888	4035
140	10	917	442	3293
	15	1526	737	3998
	20	2145	1036	4943
160	10	1048	505	3728
	15	1744	842	4598
	20	2451	1184	5723
180	10	1179	568	4013
	15	1962	948	4973
	20	2758	1332	6180
200	10	1310	631	4328
	15	2180	1053	5610
	20	3064	1480	6690
220	10	1441	694	4845
	15	2398	1158	6323
	20	3370	1628	7613
240	10	1572	757	5348
	15	2616	1264	6930
	20	3677	1776	8318
260	10	1703	820	5625
	15	2834	1369	7328
	20	3983	1924	8835
280	10	1834	884	6000
	15	3052	1474	7830
	20	4290	2072	9405
300	10	1965	947	6285
	15	3270	1579	8183
	20	4596	2220	9870

	STANDARD			
	Type	Watts 75/65	Watts 55/45	Kr.
H	030			
10	10	330	160	1815
	15	544	264	2040
	20	762	370	2280
10	10	413	200	1920
	15	680	330	2213
	20	953	463	2483
10	10	496	240	2055
	15	815	396	2363
	20	1144	556	2670
10	10	578	280	2310
	15	951	462	2670
	20	1334	648	3083
10	10	661	320	2445
	15	1087	528	2850
	20	1525	741	3293
10	10	743	360	2588
	15	1223	594	3053
	20	1715	834	3525
10	10	826	400	2820
	15	1359	660	3315
	20	1906	926	3878
10	10	909	440	2963
	15	1495	727	3540
	20	2097	1019	4125
10	10	991	480	3090
	15	1631	793	3698
	20	2287	1112	4328
10	10	1156	560	3645
	15	1903	925	4335
	20	2668	1297	5265
10	10	1322	640	4125
	15	2174	1057	4973
	20	3050	1482	6090
10	10	1487	720	4425
	15	2446	1189	5378
	20	3431	1668	6608
10	10	1652	800	4793
	15	2718	1321	6075
	20	3812	1853	7170
10	10	1817	880	5355
	15	2990	1453	6825
	20	4193	2038	8115
10	10	1982	960	5895
	15	3262	1585	7485
	20	4574	2223	8858
10	10	2148	1040	6218
	15	3533	1717	7913
	20	4956	2409	9405
10	10	2313	1120	6638
	15	3805	1849	8453
	20	5337	2594	10028
10	10	2478	1200	6938
	15	4077	1981	8843
	20	5718	2779	10523

	TWIN			
	Type	Watts 75/65	Watts 55/45	Kr.
11	11	448	213	2625
	16	592	279	2978
	21	779	365	3143
11	11	561	267	2820
	16	740	349	3240
	21	974	456	3428
11	11	673	320	2978
	16	888	418	3488
	21	1169	547	3713
11	11	785	373	3368
	16	1036	488	3990
	21	1364	639	4275
11	11	897	426	3555
	16	1184	558	4230
	21	1558	730	4568
11	11	1009	479	3750
	16	1332	628	4515
	21	1753	821	4890
11	11	1121	533	4080
	16	1480	697	4950
	21	1948	912	5385
11	11	1233	586	4305
	16	1628	767	5235
	21	2143	1003	5730
11	11	1345	639	4493
	16	1776	837	5490
	21	2338	1095	6023
11	11	1569	745	5168
	16	2072	976	6323
	21	2727	1277	7305
11	11	1794	852	5903
	16	2368	1116	7343
	21	3117	1460	8520
11	11	2018	959	6345
	16	2664	1255	7943
	21	3506	1642	9210
11	11	2242	1065	6855
	16	2960	1395	9030
	21	3896	1824	9975
11	11	2466	1172	7695
	16	3256	1534	10230
	21	4286	2007	11370
11	11	2690	1278	8408
	16	3552	1674	11130
	21	4675	2189	12368
11	11	2915	1385	8895
	16	3848	1813	11768
	21	5065	2372	13110
11	11	3139	1491	9450
	16	4144	1953	12503
	21	5454	2554	13950
11	11	3363	1598	9900
	16	4440	2092	13110
	21	5844	2736	14678

EN442 output at 20°C room temperature

TEMPO FREESTANDING

TEMF.HHH LLL TT.101

	STANDARD				TWIN			
	Type	Watts 75/65	Watts 55/45	Kr.	Type	Watts 75/65	Watts 55/45	Kr.
L	H 040							
040	10	385	187	1943	11	506	241	2760
	15	627	306	2220	16	680	320	3173
	20	878	429	2468	21	910	424	3315
050	10	482	234	2070	11	632	300	2948
	15	784	383	2370	16	850	400	3428
	20	1098	537	2655	21	1137	530	3600
060	10	578	281	2235	11	758	360	3158
	15	941	460	2580	16	1020	480	3690
	20	1318	645	2903	21	1364	636	3915
070	10	674	328	2505	11	885	421	3555
	15	1098	537	2918	16	1190	560	4200
	20	1537	752	3308	21	1592	742	4515
080	10	770	375	2633	11	1011	481	3750
	15	1254	613	3090	16	1360	639	4485
	20	1757	859	3533	21	1819	848	4823
090	10	867	422	2813	11	1138	541	3968
	15	1411	690	3293	16	1530	719	4770
	20	1976	966	3795	21	2047	954	5145
100	10	963	469	3068	11	1264	601	4328
	15	1568	766	3593	16	1700	799	5220
	20	2196	1074	4163	21	2274	1060	5670
110	10	1059	515	3240	11	1390	661	4560
	15	1725	843	3833	16	1870	879	5550
	20	2416	1182	4425	21	2501	1166	6038
120	10	1156	562	3360	11	1517	721	4748
	15	1882	920	4005	16	2040	959	5805
	20	2635	1289	4643	21	2729	1272	6338
140	10	1348	656	3968	11	1770	841	5513
	15	2195	1073	4710	16	2380	1119	6698
	20	3074	1503	5663	21	3184	1484	7695
160	10	1541	750	4485	11	2022	961	6270
	15	2509	1226	5378	16	2720	1279	7740
	20	3514	1718	6503	21	3638	1696	8925
180	10	1733	843	4830	11	2275	1081	6765
	15	2822	1379	5828	16	3060	1439	8393
	20	3953	1933	7058	21	4093	1908	9675
200	10	1926	937	5250	11	2528	1202	7298
	15	3136	1533	6585	16	3400	1599	9540
	20	4392	2148	7680	21	4548	2120	10493
220	10	2119	1031	5828	11	2781	1322	8190
	15	3450	1686	7358	16	3740	1759	10778
	20	4831	2363	8648	21	5003	2332	11895
240	10	2311	1124	6435	11	3034	1442	8940
	15	3763	1839	8070	16	4080	1918	11708
	20	5270	2577	9473	21	5458	2544	12960
260	10	2504	1218	6788	11	3286	1562	9465
	15	4077	1993	8535	16	4420	2078	12398
	20	5710	2792	10035	21	5912	2755	13748
280	10	2696	1312	7268	11	3539	1682	10088
	15	4390	2146	9120	16	4760	2238	13170
	20	6149	3007	10710	21	6367	2968	14648
300	10	2889	1406	7598	11	3792	1802	10545
	15	4704	2299	9548	16	5100	2398	13830
	20	6588	3222	11243	21	6822	3180	15390

	STANDARD				TWIN			
	Type	Watts 75/65	Watts 55/45	Kr.	Type	Watts 75/65	Watts 55/45	Kr.
H 050								
10	430	210	2108	11	554	263	2925	
15	694	341	2393	16	759	356	3345	
20	970	477	2648	21	1033	479	3518	
10	538	263	2250	11	693	330	3120	
15	867	426	2565	16	949	445	3593	
20	1213	597	2865	21	1291	599	3810	
10	646	316	2423	11	832	396	3345	
15	1040	511	2775	16	1139	534	3893	
20	1455	716	3128	21	1549	719	4155	
10	753	368	2723	11	970	461	3765	
15	1214	597	3135	16	1329	624	4425	
20	1698	835	3555	21	1807	839	4748	
10	861	421	2865	11	1109	527	3968	
15	1387	682	3315	16	1518	712	4710	
20	1940	954	3795	21	2066	959	5070	
10	968	473	3053	11	1247	593	4200	
15	1561	768	3548	16	1708	801	5025	
20	2183	1074	4058	21	2324	1079	5430	
10	1076	526	3308	11	1386	659	4590	
15	1734	853	3878	16	1898	891	5490	
20	2425	1193	4470	21	2582	1198	5970	
10	1184	579	3518	11	1525	725	4845	
15	1907	938	4148	16	2088	980	5835	
20	2668	1312	4740	21	2840	1318	6345	
10	1291	631	3653	11	1663	791	5048	
15	2081	1023	4313	16	2278	1069	6113	
20	2910	1431	4965	21	3098	1438	6660	
10	1506	736	4328	11	1940	923	5858	
15	2428	1194	5093	16	2657	1247	7095	
20	3395	1670	6053	21	3615	1678	8093	
10	1722	842	4853	11	2218	1055	6653	
15	2774	1364	5783	16	3037	1425	8168	
20	3880	1908	6938	21	4131	1917	9368	
10	1937	947	5258	11	2495	1187	7185	
15	3121	1535	6278	16	3416	1603	8850	
20	4365	2147	7530	21	4648	2157	10140	
10	2152	1052	5730	11	2772	1318	7785	
15	3468	1706	7088	16	3796	1781	10028	
20	4850	2385	8205	21	5164	2397	11018	
10	2367	1157	6338	11	3049	1450	8700	
15	3815	1876	7890	16	4176	1959	11288	
20	5335	2624	9210	21	5680	2636	12458	
10	2582	1262	6983	11	3326	1582	9510	
15	4162	2047	8663	16	4555	2137	12300	
20	5820	2862	10088	21	6197	2876	13568	
10	2798	1368	7380	11	3604	1714	10058	
15	4508	2217	9150	16	4935	2316	13013	
20	6305	3101	10680	21	6713	3116	14385	
10	3013	1473	7898	11	3881	1846	10718	
15	4855	2388	9780	16	5314	2493	13853	
20	6790	3339	11415	21	7230	3356	15338	
10	3228	1578	8273	11	4158	1977	11220	
15	5202	2558	10238	16	5694	2672	14528	
20	7275	3578	11993	21	7746	3595	16125	

EN442 output at 20°C room temperature

MILTON
MEGATHERM

MILTON MEGATHERM A/S

Formervangen 14-16
DK - 2600 Glostrup

Tel: +45 4697 0000
Fax: +45 4697 0001

info@miltonmegatherm.dk
www.miltonmegatherm.dk

jaga
CLIMATE
DESIGNERS

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12
Fax: +32 (0)11 29 41 60
export@jaga.com

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in line
with our policy of continuous improvement and innovation.
All prices in DKK, exclude VAT. Prices valid from January 1, 2024.
Replaces all existing price lists.