




CONNECTION SETS & VALVES

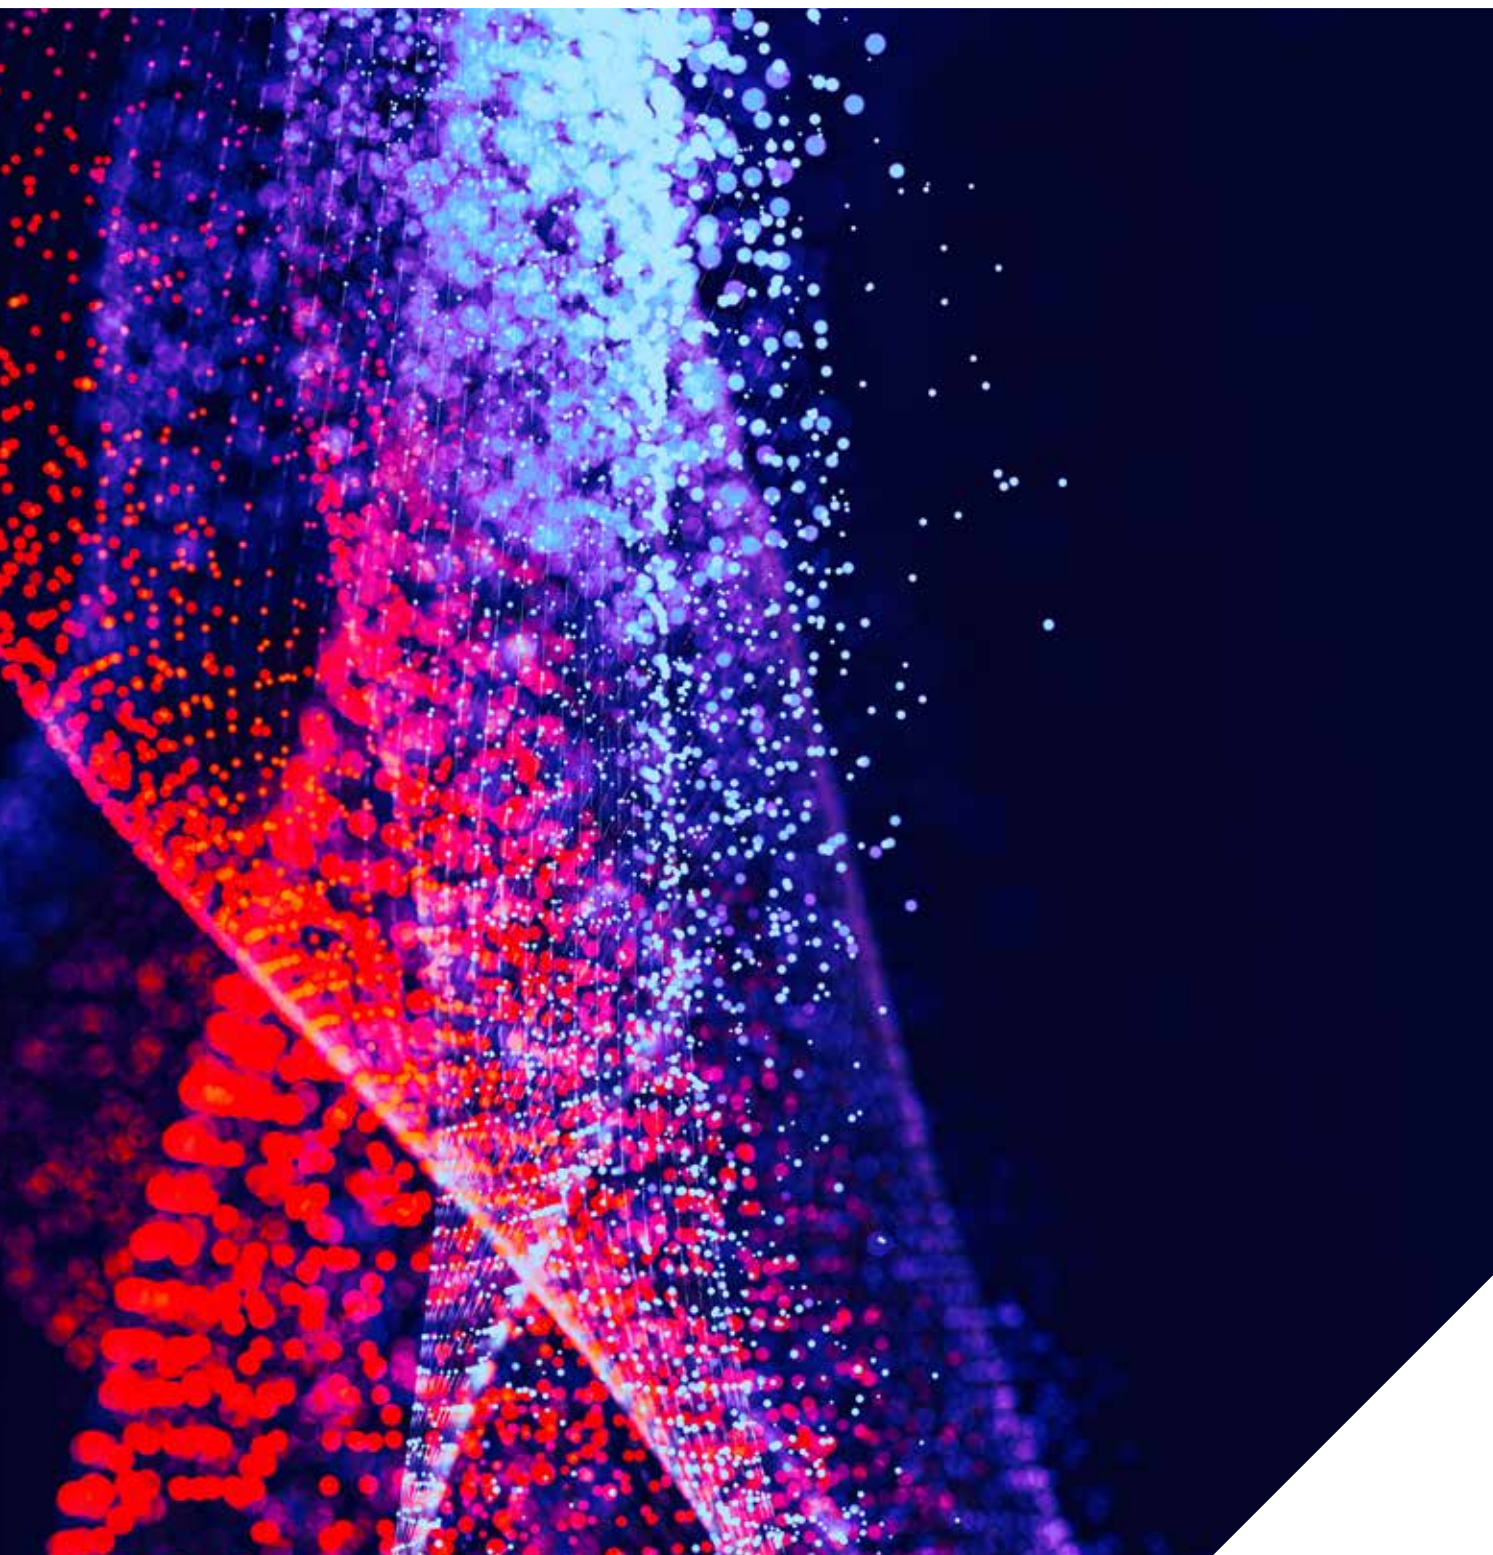

HEIMEIER WILL BECOME GAMPPER

Available as of November 2023

As of autumn 2023, the Heimeier Eclipse valve will be replaced by the new Gampper Vario-DP Dynamic valve. This valve is pressure independent with a constant flow rate configurable up to 340 l/h. The design of the Jaga Gampper Vario-DP valve is identical to the Jaga Heimeier Eclipse valve, warranting full compatibility with the Jaga units.

150 l/h ► **340 l/h**



OBSOLETE


	CODE
G½	5090.5405
Eurocone	5090.5407
SET	COLO
262	COLO.EF2.
265	COLO.EW2.
161	COLO.HECW.
162	COLO.HECF.
163	COLO.HESW.
164	COLO.HESF.

NEW


	CODE
G½	5090.3405
Eurocone	5090.3407
SET	COLO
282	COLO.GF2.
285	COLO.GW2.
181	COLO.GACW.
182	COLO.GACF.
183	COLO.GASW.
184	COLO.GASF.

ALL OUR LOW-H₂O HEAT EXCHANGERS CAN BE CONNECTED EITHER TO THE LEFT AND TO THE RIGHT!

CONNECTION ON THE RIGHT

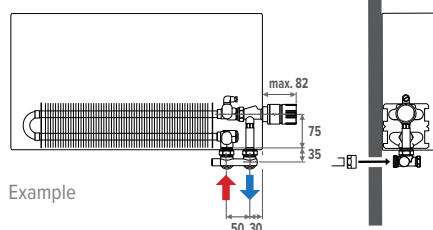

CONNECTION ON THE LEFT

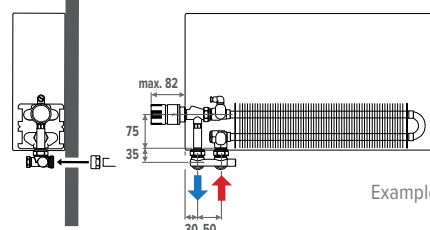

CONNECTION SETS & VALVES

CONNECTION SETS

EUROCONE

To the wall	6
Jaga H-block	6
Jaga Crossflow Valve	8
To the floor	10
Jaga H-block	10
Jaga Crossflow H-block	12
To the wall within the casing	14
To the floor	15
Radiator	16
Mini Canal, Mini Canal Pro,	
Mini Canal Hybrid	16
Briza 12	17
Briza 22/26	18
Freedom	19
Clima Canal, Clima Beam	20

DN20 G3/4"

Radiator	22
Clima Beam	22
Briza 22/26	23

M24 X1.5

via bottom of casing	24
Jaga Pro valve M24	24
Within the casing	26

M24 19/"

Jaga Deco Pro valve	28
To the wall	30
To the floor	32
Inline thermostatic valve	33

SEPERATE VALVES

EUROCONE

Jaga H-valve 3/4" Eurocone	36
Jaga Crossflow Valve	37
Jaga valve 3/4" Eurocone	38
Jaga valve 3/4" straight	39
Jaga return valves 3/4" Eurocone	39
H-block with tail-piece 3/4" Eurocone	40
Cross flow block with tail-piece 3/4" Eurocone	40

FEMALE THREAD

Jaga valve 1/2" female thread	41
Jaga Gampper Varlio DP valve 1/2" female thread	41
Extension pipe	42
Jaga lockshield valves 1/2" female thread	42
Extended air vent 1/8"	42
Adaptor for hybrid installations	43

DN 20 G3/4"

Jaga valve	44
------------	----

M24 X 1.5

Jaga Pro valve M24	46
--------------------	----

M24 19/"

Jaga deco single point connection	47
Jaga Deco Pro valve	48
Jaga Deco angled valve	49
Jaga deco valve	50
Jaga deco lockshield valve	51

SLEEVE COUPLING

Nickel	52
Chrome	53

THERMOSTATIC HEADS

PRESSURE DROP

jaga
CLIMATE
DESIGNERS

CONNECTION SETS






CONNECTION SETS EUROCONE

TO THE WALL VIA UNDERSIDE OF CASING WITH JAGA H-BLOCK


SET 103




To the wall
Controls below
Flow on the outside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe / One pipe

Thermostatic head		
Heating only		
COLO HBSW AW 4...	AW	
COLO HBSW AB 4...	AB	
COLO HBSW AC 4...	AC	
COLO HBSW JH 4...	JH	
COLO HBSW JW 4...	JW	
Heating and cooling		
COLO HBSW AW 5...	AW	+
COLO HBSW AB 5...	AB	+
COLO HBSW HC 5...	HC	
Manual		
COLO HBSW MA 4...	MA	

Fill in sleeve coupling code

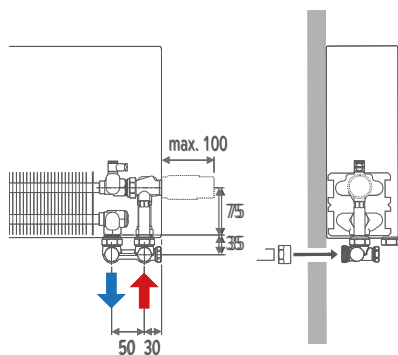


SET 183



To the wall
Controls below
Flow on the outside
Automatic flow limiter (20 - 340 l/h)
Two pipe / One pipe

Thermostatic head		
Heating only		
COLO GASW AW 4...	AW	
COLO GASW AB 4...	AB	
COLO GASW AC 4...	AC	
COLO GASW JH 4...	JH	
COLO GASW JW 4...	JW	
Heating and cooling		
COLO GASW AW 5...	AW	+
COLO GASW AB 5...	AB	+
COLO GASW HC 5...	HC	
Manual		
COLO GASW MA 4...	MA	

Fill in sleeve coupling code

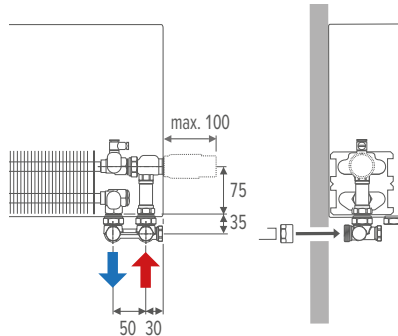

STRADA TYPE 06	STRADA TYPE 10 < 21	LINEA PLUS	TEMPO	MINI WALL H 008	MINI WALL H 013 < 028	KNOCKONWOOD TYPE 06	KNOCKONWOOD TYPE 10 < 21	INSTALLATION IN A WALL RECESS	MINI FREESTANDING	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code

COLO HBSW JW 4 112

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU

CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

TO THE WALL VIA UNDERSIDE OF CASING WITH JAGA H-BLOCK


A diagram of a gas valve assembly. It shows a gas control valve (a white cylindrical component) connected to a gas control solenoid (a small yellow component) and a gas control solenoid valve (a small yellow component). The assembly is connected to a gas line (a red pipe) and a gas outlet (a red pipe). A dashed line indicates the gas outlet path.

Please specify the correct position of the control button in the coding.
30 (left) or **60** (right)
 Ex.: STRW 050 100 16 **60**

Heating only

COLO VBSW AW 4...	AW	
COLO VBSW AB 4...	AB	
COLO VBSW AC 4...	AC	
COLO VBSW JH 4...	JH	
COLO VBSW JW 4...	JW	
Heating and cooling		
COLO VBSW AW 5...	AW	 + 
COLO VBSW AB 5...	AB	 + 
COLO VBSW HC 5...	HC	
Manual		
COLO VBSW MA 4...	MA	

Fill in sleeve coupling code




A technical diagram showing a mechanical assembly. A red U-shaped pipe is connected to a grey base. A dashed cylinder is positioned above the pipe, with a dashed line indicating its movement or position. The assembly is mounted on a grey base with a blue component and a red component.

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 **00**

Heating only

COLO VBSW RD 4...	RD	
COLO VBSW RW 4...	RW	
Heating and cooling		
COLO VBSW 24 4...	24 (24 VDC)	
COLO VBSW 23 4...	23 (230 VAC)	

Fill in sleeve coupling code

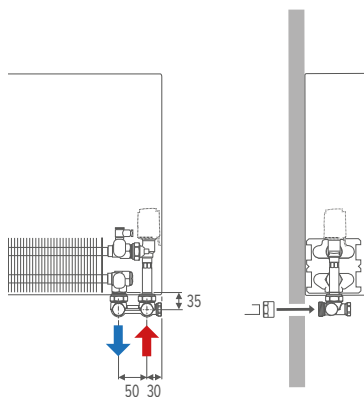[illegible]

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.


COLO VBSW JW 4 112

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

TO THE WALL VIA UNDERSIDE OF CASING WITH JAGA CROSSFLOW VALVE



Thermostatic head

Heating only



Heating and cooling

COLO HBCW AW 5...	AW	
COLO HBCW AB 5...	AB	
COLO HBCW HC 5...	HC	

Manual

COLO HBCW MA 4... MA

Fill in sleeve coupling code

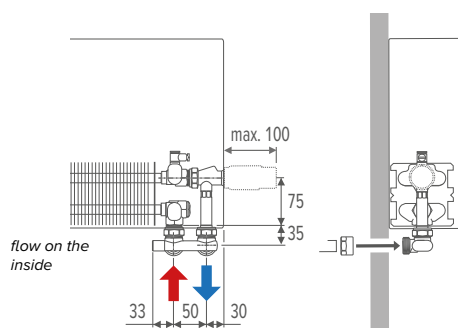

Thermostatic head

Heating only


Heating and cooling

COLO GACW AW 5...	AW	 + 
COLO GACW AB 5...	AB	 + 
COLO GACW HC 5...	HC	

Manual

COLO GACW MA 4... MA

Fill in sleeve coupling code

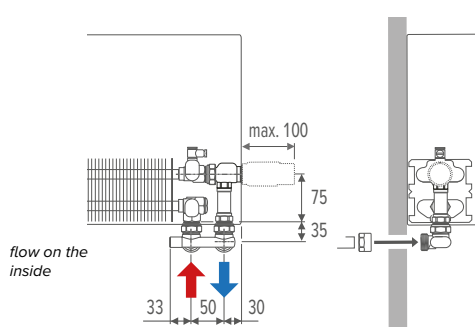[illegible]

Ordering example

Add the code of the connection set to the clamp couplings. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code *sleeve coupling code*

COLO HBCW JW 4 112

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU


CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

CONNECTION SETS EUROCONE

TO THE WALL VIA UNDERSIDE OF CASING WITH JAGA CROSSFLOW VALVE

SET 115

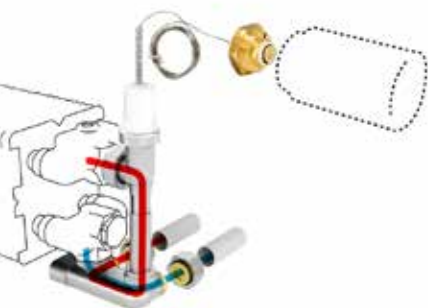

To the wall
Controls at the top
Flow on the inside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

Please specify the correct position of the control button in the coding.
30 (left) of **60** (right)!
Ex.: STRW 050 100 16 **60**

Thermostatic head

Heating only


COLO VBCW AW 4...	AW	
COLO VBCW AB 4...	AB	
COLO VBCW AC 4...	AC	
COLO VBCW JH 4...	JH	
COLO VBCW JW 4...	JW	

Heating and cooling


COLO VBCW AW 5...	AW	
COLO VBCW AB 5...	AB	
COLO VBCW HC 5...	HC	

Manual

COLO VBCW MA 4...	MA	
-------------------	----	--

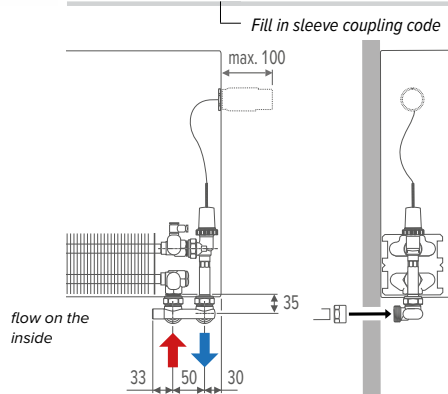

SET 111



to the wall
Remote controlled
Flow on the inside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 **00**


Thermostatic head

Heating only

COLO VBCW RD 4...	RD	
COLO VBCW RW 4...	RW	

Heating and cooling

COLO VBCW 24 4...	24 (24 VDC)	
COLO VBCW 23 4...	23 (230 VAC)	

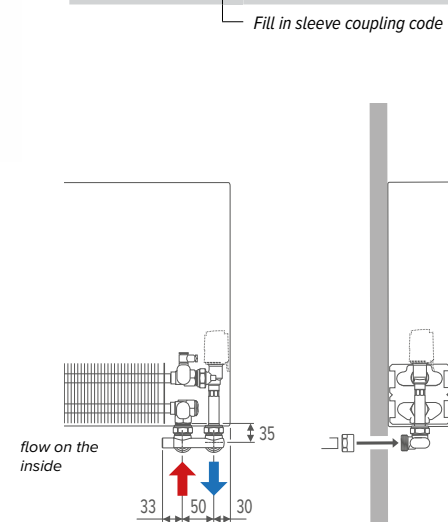

SLEEVE COUPLINGS EUROCONE

Ordering example

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
COLO VBCW JW 4 **112**

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU


CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2
615	15/2.5
619	16/1.5
620	20/2

STRADA TYPE 06	STRADA TYPE 10 < 21	LINEA PLUS	TEMPO	MINI WALL H 008 -013	MINI WALL H 023 -028	KNOCKONWOOD TYPE 06	KNOCKONWOOD TYPE 10 < 21	INSTALLATION IN A WALL RECESS	MINI FREESTANDING	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓

CONNECTION SETS EUROCONE

TO THE FLOOR WITH JAGA H-VALVE

SET 104



To the floor
Controls below
Flow on the outside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe / One pipe

Thermostatic head

Heating only

COLO HBSF AW 4...	AW	
COLO HBSF AB 4...	AB	
COLO HBSF AC 4...	AC	
COLO HBSF JH 4...	JH	
COLO HBSF JW 4...	JW	


Heating and cooling

COLO HBSF AW 5...	AW	
COLO HBSF AB 5...	AB	
COLO HBSF HC 5...	HC	


Manual

COLO HBSF MA 4...	MA	
-------------------	----	--

Fill in sleeve coupling code

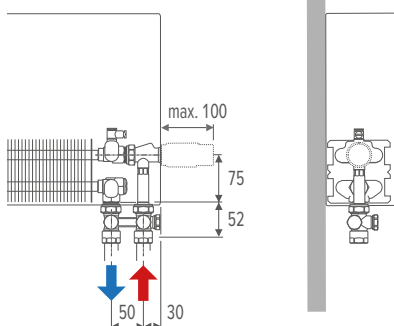

SET 184



To the floor
Controls below
Flow on the outside
Automatic flow limiter (20 - 340 l/h)
Two pipe / One pipe

Thermostatic head

Heating only

COLO GASF AW 4...	AW	
COLO GASF AB 4...	AB	
COLO GASF AC 4...	AC	
COLO GASF JH 4...	JH	
COLO GASF JW 4...	JW	


Heating and cooling

COLO GASF AW 5...	AW	
COLO GASF AB 5...	AB	
COLO GASF HC 5...	HC	

Manual

COLO GASF MA 4...	MA	
-------------------	----	--

Fill in sleeve coupling code

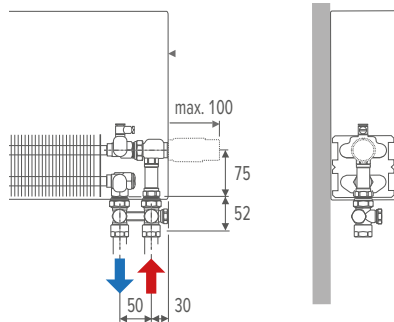

STRADA	LINEA PLUS	TEMPO	MINI WALL H 008	MINI WALL H 013 < 028	KNOCKONWOOD	INSTALLATION IN A WALL RECESS	MINI FREESTANDING H 008	MINI FREESTANDING H 013 < 028	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓
-	-	-	-	-	-	-	-	-	-	-	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓

SLEEVE COUPLINGS EUROCONE

Ordering example

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code

COLO HBSF JW 4 112

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU


CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

CONNECTION SETS EUROCONE

TO THE FLOOR WITH JAGA H-VALVE

SET 118

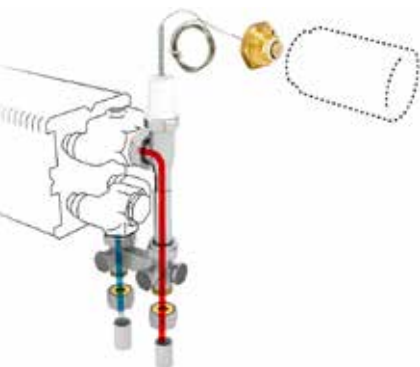

To the floor
Controls at the top
Flow on the outside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe / One pipe

Please specify the correct position of the control button in the coding.
30 (left) or **60** (right)
Ex.: STRW 050 100 16 **60**

Thermostatic head

Heating only

COLO VBSF AW 4...	AW	
COLO VBSF AB 4...	AB	
COLO VBSF AC 4...	AC	
COLO VBSF JH 4...	JH	
COLO VBSF JW 4...	JW	


Heating and cooling

COLO VBSF AW 5...	AW	
COLO VBSF AB 5...	AB	
COLO VBSF HC 5...	HC	

Manual

COLO VBSF MA 4...	MA	
-------------------	----	--

Fill in sleeve coupling code

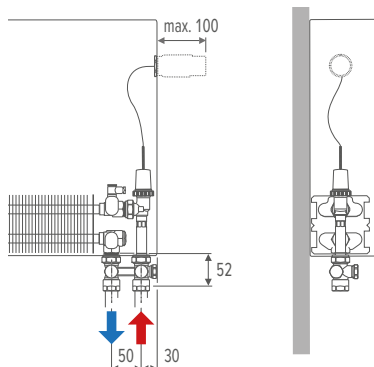

SET 114



To the floor
Remote controlled
Flow on the outside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe / One pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 **00**

Thermostatic head


Heating only

COLO VBSF RD 4...	RD	
COLO VBSF RW 4...	RW	

Heating and cooling

COLO VBSF 24 4...	24 (24 VDC)	
COLO VBSF 23 4...	23 (230 VAC)	

Fill in sleeve coupling code

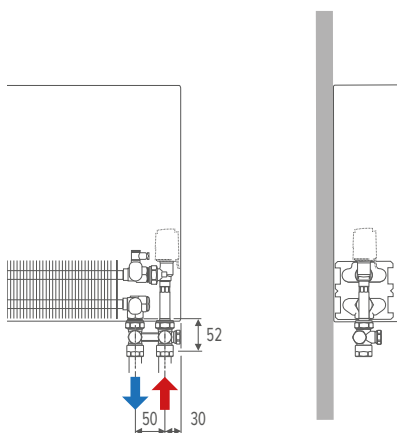

SLEEVE COUPLINGS EUROCONE

Ordering example

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
COLO VBSF JW 4 **112**

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU

CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2


STRADA	LINEA PLUS	TEMPO	MINI WALL H 008-013	MINI WALL H 023-028	KNOCKONWOOD	INSTALLATION IN A WALL RECESS	MINI FREESTANDING H 008	MINI FREESTANDING H 013 < 028	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
--------	------------	-------	---------------------	---------------------	-------------	-------------------------------	-------------------------	-------------------------------	-------------------------	--------------------	---------------	--------------------------------------

✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓


CONNECTION SETS EUROCONE

TO THE FLOOR WITH JAGA CROSS FLOW VALVE

SET 102

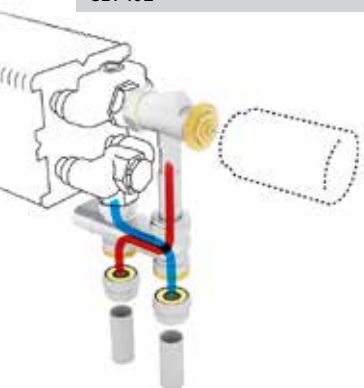

To the floor
Controls below
Flow on the inside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

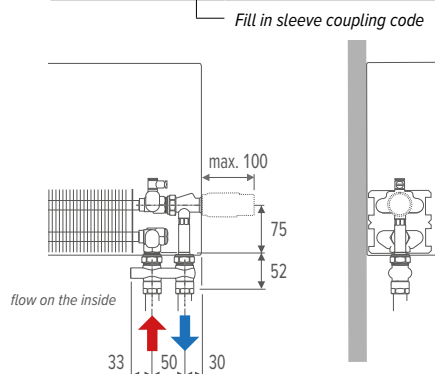

Thermostatic head

Heating only

COLO HBCF AW 4...	AW	
COLO HBCF AB 4...	AB	
COLO HBCF AC 4...	AC	
COLO HBCF JH 4...	JH	
COLO HBCF JW 4...	JW	

Heating and cooling


COLO HBCF AW 5...	AW	
COLO HBCF AB 5...	AB	
COLO HBCF HC 5...	HC	

Manual


COLO HBCF MA 4...	MA	
-------------------	----	--

Fill in sleeve coupling code

SET 182

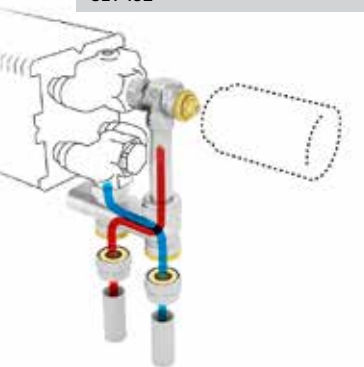

To the floor
Controls below
Flow on the inside
Automatic flow limiter (20 - 340 l/h)
Two pipe

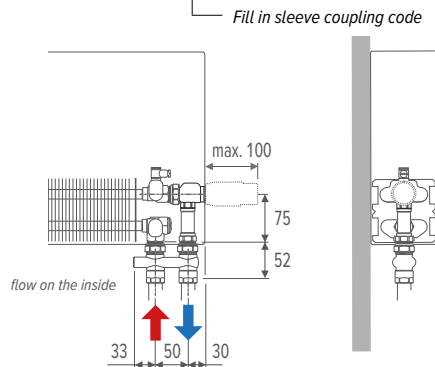

Thermostatic head

Heating only

COLO GACF AW 4...	AW	
COLO GACF AB 4...	AB	
COLO GACF AC 4...	AC	
COLO GACF JH 4...	JH	
COLO GACF JW 4...	JW	

Heating and cooling

COLO GACF AW 5...	AW	
COLO GACF AB 5...	AB	
COLO GACF HC 5...	HC	

Manual

COLO GACF MA 4...	MA	
-------------------	----	--

Fill in sleeve coupling code

SLEEVE COUPLINGS EUROCONE

Ordering example

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code

COLO HBCF JW 4 112

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU


CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2
615	15/2.5
619	16/1.5
620	20/2

STRADA	LINEA PLUS	TEMPO	MINI WALL H 008	MINI WALL H 013 < 028	KNOCKONWOOD	INSTALLATION IN A WALL RECESS	MINI FREESTANDING H 008	MINI FREESTANDING H 013 < 028	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓
-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓	✓	✓	✓	✓

CONNECTION SETS EUROCONE

TO THE FLOOR WITH JAGA CROSS FLOW VALVE

SET 116

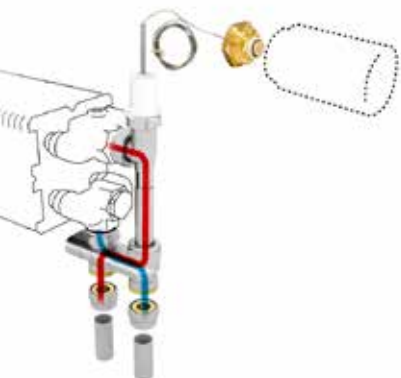

To the floor
Controls at the top
Flow on the inside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

Please specify the correct position of the control button in the coding.
30 (left) or **60** (right)
Ex.: STRW 050 100 16 **60**

Thermostatic head

Heating only

COLO VBCF AW 4...	AW	
COLO VBCF AB 4...	AB	
COLO VBCF AC 4...	AC	
COLO VBCF JH 4...	JH	
COLO VBCF JW 4...	JW	


Heating and cooling

COLO VBCF AW 5...	AW	
COLO VBCF AB 5...	AB	
COLO VBCF HC 5...	HC	


Manual

COLO VBCF MA 4...	MA	
-------------------	----	--

Fill in sleeve coupling code

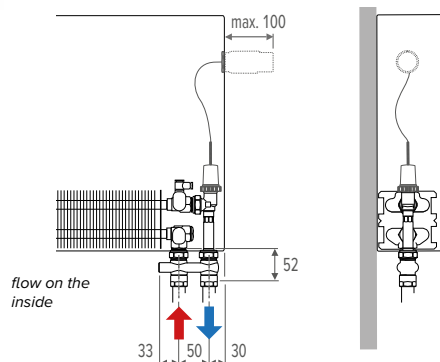

SET 112

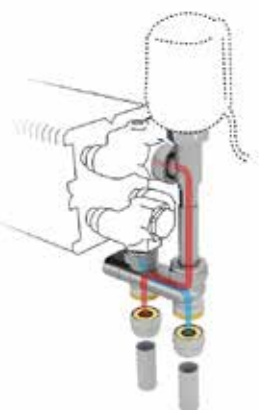

To the floor
Remote controlled
Flow on the inside
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 **00**

Thermostatic head


Heating only

COLO VBCF RD 4...	RD	
COLO VBCF RW 4...	RW	

Heating and cooling

COLO VBCF 24 4...	24 (24 VDC)	
COLO VBCF 23 4...	23 (230 VAC)	

Fill in sleeve coupling code

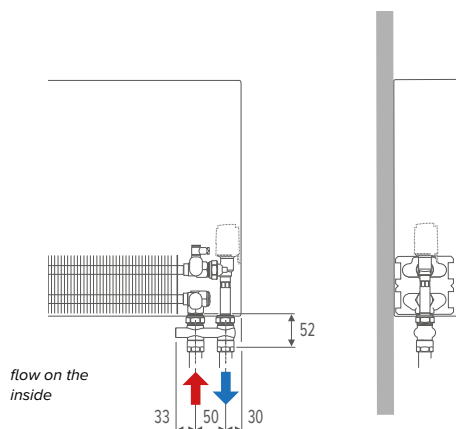

SLEEVE COUPLINGS EUROCONE

Ordering example

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
COLO VBCF JW 4 **112**

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU


CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2
615	15/2.5
619	16/1.5
620	20/2

STRADA TYPE 06	STRADA TYPE 10 < 21	LINEA PLUS	TEMPO	MINI WALL H 008	MINI WALL H 013 < 028	KNOCKONWOOD TYPE 06	KNOCKONWOOD TYPE 10 < 21	INSTALLATION IN A WALL RECESS	MINI FREESTANDING	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
-	-	-	-	-	-	-	-	-	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓

CONNECTION SETS EUROCONE

AUTOMATIC FLOW LIMITER - CROSSFLOW VENTIEL


SET 185



to the wall
Remote controlled
Flow on the inside
Automatic flow limiter
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 00

Thermostatic head		
Heating only		
COLO VGCW RD 4...	RD	
COLO VGCW RW 4...	RW	
Heating and cooling		
COLO VGCW 24 4...	24 (24 VDC)	
COLO VGCW 23 4...	23 (230 VAC)	
Fill in sleeve coupling code		

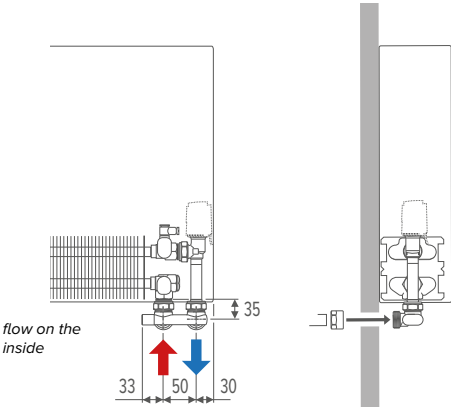


SET 186



To the floor
Remote controlled
Flow on the inside
Automatic flow limiter
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 00

Thermostatic head		
Heating only		
COLO VGCF RD 4...	RD	
COLO VGCF RW 4...	RW	
Heating and cooling		
COLO VGCF 24 4...	24 (24 VDC)	
COLO VGCF 23 4...	23 (230 VAC)	
Fill in sleeve coupling code		

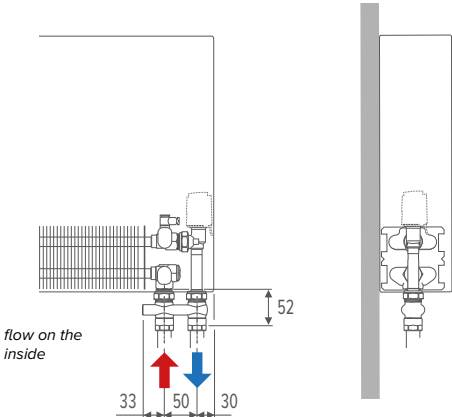

SLEEVE COUPLINGS EUROCONE

Ordering example
Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
COLO HBCF JW 4 112

Precision metal tube	
CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1


Synthetic or RPE/ALU	
CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2
615	15/2.5
619	16/1.5
620	20/2

STRADA	LINEA PLUS	TEMPO	MINI WALL H 008	MINI WALL H 013 < 028	KNOCKONWOOD	INSTALLATION IN A WALL RECESS	MINI FREESTANDING H 008	MINI FREESTANDING H 013 < 028	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
✓	✓	✓	-	✓	✓	✓	-	-	-	-	✓	✓
✓	✓	✓	-	✓	✓	✓	-	-	-	-	✓	✓
✓	✓	✓	-	✓	✓	✓	-	-	-	-	✓	✓
✓	✓	✓	-	✓	✓	✓	-	-	-	-	✓	✓

CONNECTION SETS EUROCONE

AUTOMATIC FLOW LIMITER - H-BLOCK

SET 187




To the wall
Remote controlled
Flow on the outside
Automatic flow limiter
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 **00**

Thermostatic head		
Heating only		
COLO VGSW RD 4...	RD	
COLO VGSW RW 4...	RW	
Heating and cooling		
COLO VGSW 24 4...	24 (24 VDC)	
COLO VGSW 23 4...	23 (230 VAC)	

Fill in sleeve coupling code

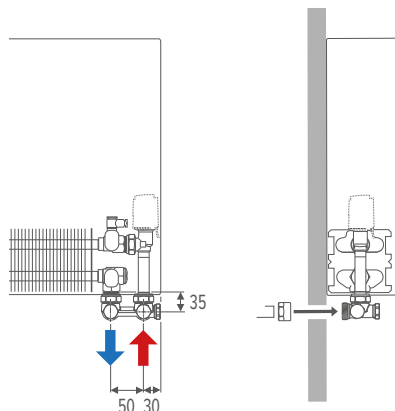

SET 188




To the floor
Remote controlled
Flow on the outside
Automatic flow limiter
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 **00**

Thermostatic head			€
Heating only			
COLO VGSF RD 4...	RD		210
COLO VGSF RW 4...	RW		168
Heating and cooling			
COLO VGSF 24 4...	24 (24 VDC)		91
COLO VGSF 23 4...	23 (230 VAC)		91

Fill in sleeve coupling code

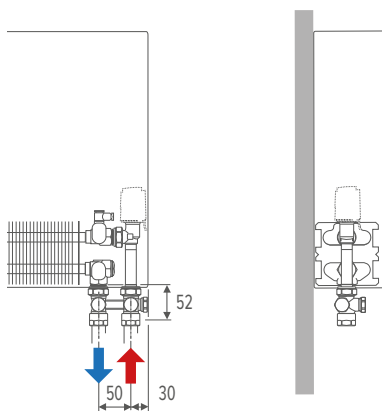

STRADA TYPE 06	STRADA TYPE 10 < 21	LINEA PLUS	TEMPO	MINI WALL H 008	MINI WALL H 013 < 028	KNOCKONWOOD TYPE 06	KNOCKONWOOD TYPE 10 < 21	INSTALLATION IN A WALL RECESS	MINI FREESTANDING	LINEA PLUS FREESTANDING	TEMPO FREESTANDING	STRADA HYBRID	INSTALLATION IN A WALL RECESS HYBRID
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓
✓	✓	✓	✓	-	✓	-	✓	✓	-	-	-	✓	✓

SLEEVE COUPLINGS EUROCONE

Ordering example

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
COLO VBCF JW 4 **112**

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU

CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

TO THE WALL WITHIN THE CASING

A diagram illustrating the connection of a cable to a terminal block. A crimping tool is shown crimping a red wire onto a terminal. The terminal block has two terminals, one of which is already connected to a blue wire. The crimping tool is shown in two positions: one where it is crimping the red wire onto the terminal, and another where it is crimping the blue wire onto the terminal.

[illegible]**jaga**

TO THE FLOOR


A 3D CAD model showing a robotic arm with a gripper assemblying a small cylindrical component into a larger housing. The gripper is positioned above the component, which is being inserted into a slot in the housing. A dashed line indicates the path of the component as it is moved into the housing.

SLEEVE COUPLINGS EUROCON

Connectionsets & valves - 14

CONNECTION SETS EUROCONE


SET 275



To the wall
Automatic flow limiter (0.01 - 0.34)
Two pipe

Thermostatic head		
Heating only		
COLO REE AW 4...	AW	
COLO REE AB 4...	AB	
COLO REE AC 4...	AC	
COLO REE JH 4...	JH	
COLO REE JW 4...	JW	
Heating and cooling		
COLO REE AW 5...	AW	 + 
COLO REE AB 5...	AB	 + 
COLO REE HC 5...	HC	
Manual		
COLO REE MA 4...	MA	

Fill in sleeve coupling code

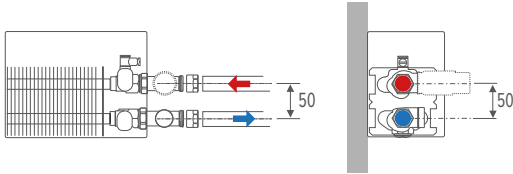

LINEA PLUS	✓	✓	-	✓	✓	✓	✓
TEMPO	✓	✓	-	✓	✓	✓	✓
MINI WALL H 008	✓	✓	-	✓	✓	✓	✓
MINI WALL H 013 < 028	✓	✓	-	✓	✓	✓	✓
INSTALLATION IN A WALL RECESS	✓	✓	-	✓	✓	✓	✓
INSTALLATION IN A WALL RECESS HYBRID	✓	✓	-	✓	✓	✓	✓
ECOREVIVA HYBRID	✓	✓	-	✓	✓	✓	✓

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE
Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.


connection set code sleeve coupling code
COLO SW2 JW 4 112

Precision metal tube		Synthetic or RPE/ALU	
CODE	TUBE Ø	CODE	TUBE Ø
112	12/1	612	12/2
114	14/1	614	14/2
115	15/1	616	16/2
116	16/1	618	18/2
118	18/1		

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

CONNECTION SETS 1/2"

SET 75




To the wall
Automatic flow limiter (0.01 - 0.34)
Two pipe

Thermostatic head

Heating only		
COLO REG AW 0	AW	
COLO REG AB 0	AB	
COLO REG AC 0	AC	
COLO REG JH 0	JH	
COLO REG JW 0	JW	
Heating and cooling		
COLO REG HC 0	HC	
Manual		
COLO REG MA 0	MA	

Fill in sleeve coupling code

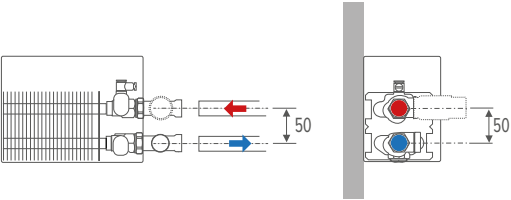

LINEA PLUS
TEMPO
MINI WALL H 008
MINI WALL H 013 < 028
INSTALLATION IN A WALL RECESS
INSTALLATION IN A WALL RECESS HYBRID
ECOREVIVA HYBRID

✓	✓	-	✓	✓	✓	✓
✓	✓	-	✓	✓	✓	✓
✓	✓	-	✓	✓	✓	✓
✓	✓	-	✓	✓	✓	✓
✓	✓	-	✓	✓	✓	✓
-	-	-	-	-	✓	✓
✓	✓	-	✓	✓	✓	✓

CONNECTION INSIDE THE FLOOR UNIT

A diagram illustrating the connection of a cable to a multi-pin connector. The cable is shown with a red pin and a blue pin, which are inserted into the corresponding pins of the connector. The connector is shown in a perspective view, with the pins labeled 'Red' and 'Blue'.


		Thermostatic head	€
Heating only			
COMC JH2 AB 4...	AB		84
COMC JH2 RD 4...	RD		195
COMC JH2 RW 4...	RW		153
Heating and cooling			
COMC JH2 24 4...	24 (24 VDC)		94
COMC JH2 23 4...	23 (230 VAC)		94
Manual			
COMC JH2 MA 4...	MA		52

Fill in sleeve coupling code



Thermostatic head		
Heating *		
COMC JV2 AB 4 ..	AB	
COMC JV2 RD 4 ..	RD	
COMC JV2 RW 4 ..	RW	
Heating and cooling		
COMC JV2 MA 4 ..	MA	
COMC JV2 24 4 ..	24 (24 VDC)	
COMC JV2 23 4 ..	23 (230 VAC)	

Fill in sleeve coupling code

[illegible]

ORDERING EXAMPLE

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

<i>connection set code</i>	<i>sleeve coupling code</i>
COMC JH2 AB 4	112

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU

CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CONNECTION SETS EUROCONE

TO THE WALL

SET 295



To the wall
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

Thermostatic head

Heating and cooling		
CODY SC5 24 4 ..	24 (24 VDC)	
CODY SC5 23 4 ..	23 (230 VAC)	
Fill in sleeve coupling code		

SET 290



To the wall
Kv 0.15 - 1.35 m³/h at Δp = 1 bars
Two pipe

Thermostatic head

Heating and cooling		
CODY LOC 00 4 ..		
Fill in sleeve coupling code		

BRIZA 12
1st heat exchanger
BRIZA 12
2nd heat exchanger
BRIZA 22
1st heat exchanger
BRIZA 22
2nd heat exchanger
BRIZA 26
1st heat exchanger
BRIZA 26
2nd heat exchanger

✓
✓
-
-
-
-
-

✓
✓
-
-
-
-

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE
Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
CODY SC5 24 4 112

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU

CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

CONNECTION SETS EUROCONE

SET 98



Kv 1.5 m³/h at Δp = 1 bars
Without default setting
Two pipe

Thermostatic head		
Heating and cooling		
CODY WA4 24 0	24 (24 VDC)	
CODY WA4 23 0	23 (230 VAC)	

SET 99



Kv 0.15 - 1.35 m³/h at Δp = 1 bars
Two pipe

Thermostatic head		
Heating and cooling		
CODY LOM 00 0		

SET 289



To the floor

Two pipe
stainless steel flexible connections 1/2":
Order separately

Thermostatic head		
Heating and cooling		
CODY B18 10 4 ..	10 (0...10VDC)	
CODY B18 23 4...	23 (230 VAC)	
CODY B18 24 4...	24 (24 VDC)	

SET 288



To the floor

Two pipe
stainless steel flexible connections 1/2":
Order separately

Thermostatic head		
Heating and cooling		
CODY L01 00 4...		

BRIZA 12	1st heat exchanger	-	-	-	✓	-	✓	-	-
BRIZA 12	2nd heat exchanger	-	-	-	✓	-	✓	-	-
BRIZA 22	1st heat exchanger	-	-	-	✓	-	✓	-	-
BRIZA 22	2nd heat exchanger	-	-	-	✓	-	✓	-	-
BRIZA 26	1st heat exchanger	-	-	-	✓	-	✓	-	-
BRIZA 26	2nd heat exchanger	-	-	-	✓	-	✓	-	-
BRIZA XS NET ZERO		-	-	-	✓	-	✓	-	-
BRIZA S NET ZERO S		-	-	-	✓	-	✓	-	-

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE
Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
CODY AA4 24 4 112
CODY B18 24 4 112

Precision metal tube		Synthetic or RPE/ALU			
CODE	TUBE Ø	CODE	TUBE Ø	CODE	TUBE Ø
112	12/1	612	12/2	615	15/2.5
114	14/1	614	14/2	619	16/1.5
115	15/1	616	16/2	620	20/2
116	16/1	618	18/2		
118	18/1				

CONNECTION SETS EUROCONE

SET 294



To the floor
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

Thermostatic head

Heating and cooling	
CODY AA4 24 4 ..	24 (24 VDC)
CODY AA4 10 4 ..	10 (0 ..10 VDC)
Fill in sleeve coupling code	

SET 291



To the floor
Kv 0.15 - 1.35 m³/h at Δp = 1 bars
Two pipe

Heating and cooling	
CODY LOS 00 4 ..	
Fill in sleeve coupling code	

SLEEVE COUPLINGS EUROCONE


ORDERING EXAMPLE
Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
CODY AA4 24 4 112

Precision metal tube		Synthetic or RPE/ALU			
CODE	TUBE Ø	CODE	TUBE Ø	CODE	TUBE Ø
112	12/1	612	12/2	615	15/2.5
114	14/1	614	14/2	619	16/1.5
115	15/1	616	16/2	620	20/2
116	16/1	618	18/2		
118	18/1				

CONNECTION SETS EUROCONE

SET 297



Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe
The connection hoses come with the unit


Thermostatic head

Heating and cooling

CODY JA4 24 4 ..	24 (24 VDC)	
CODY JA4 10 4 ..	10 (0 ..10 VDC)	

Fill in sleeve coupling code

SET 298



Kv 1.0 m³/h at Δp = 1 bars
Without default setting
Two pipe
The connection hoses come with the unit

Thermostatic head

Heating and cooling

CODY WA4 24 4 ..	24 (24 VDC)	
CODY WA4 10 4 ..	10 (0 ..10 VDC)	

Fill in sleeve coupling code

SET 299



Kv 0.15 - 1.35 m³/h at Δp = 1 bars
Two pipe
The connection hoses come with the unit

Heating and cooling

CODY LOM 00 4 ..		
------------------	--	--

Fill in sleeve coupling code

CLIMA CANAL H08/10

✓

CLIMA CANAL H13

✓

CLIMA CANAL H19

·

CLIMA BEAM

✓

✓

✓

✓

✓

✓

✓

✓

✓

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
CODY JA4 24 4 112

Precision metal tube


CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU

CODE	TUBE Ø	CODE	TUBE Ø
612	12/2	615	15/2.5
614	14/2	619	16/1.5
616	16/2	620	20/2
618	18/2		

CONNECTION SETS DN20 G 3/4"

SET 303

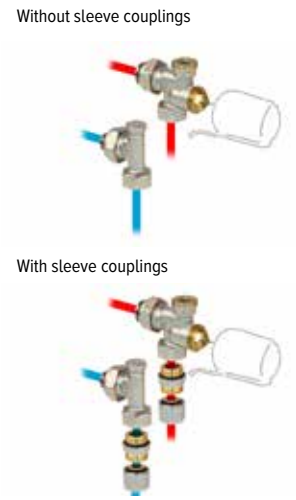


Supply: Kv 3.4 m³/h at Δp = 1 bars
Return: Kv 0.8 - 2.5 m³/h at Δp = 1 bars
Two pipe

Thermostatic head

Heating and cooling		
Without sleeve couplings		
CODY WAA 24 0	24 (24 VDC)	
CODY WAA 23 0	23 (230 VAC)	
With sleeve couplings		
CODY WAA 24 4 ...	24 (24 VDC)	
CODY WAA 23 4 ...	23 (230 VAC)	
Fill in sleeve coupling code		

SET 304

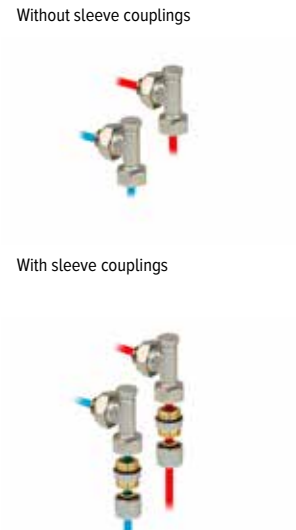

Kv 0.8 - 2.5 m³/h at Δp = 1 bars
Two pipe

Thermostatic head

Heating and cooling		
Without sleeve couplings		
CODY LOA 00 0		
With sleeve couplings		
CODY LOA 00 4 ...		
Fill in sleeve coupling code		

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE
Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
CODY WAA 24 4 112

Precision metal tube	
CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU	
CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2
615	15/2.5
619	16/1.5
620	20/2

CONNECTION SETS DN20 G 3/4"

TO THE WALL

SET 301

Without sleeve couplings



With sleeve couplings



Supply: Kv 3.4 m³/h at Δp = 1 bars
Return: Kv 0.8 - 2.5 m³/h at Δp = 1 bars
Two pipe

Thermostatic head

Heating and cooling

Without sleeve couplings

CODY WAA 24 0 24 (24 VDC) 

CODY WAA 23 0 23 (230 VAC) 

With sleeve couplings

CODY WAA 24 4 ... 24 (24 VDC) 

CODY WAA 23 4 ... 23 (230 VAC) 

Fill in sleeve coupling code

SET 302

Without sleeve couplings



With sleeve couplings



Kv 0.8 - 2.5 m³/h at Δp = 1 bars
Two pipe

Thermostatic head

Heating and cooling

Without sleeve couplings

CODY L05 00 0

With sleeve couplings

CODY L05 00 4 ...

Fill in sleeve coupling code

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code

CODY WAA 24 4 112

Precision metal tube

CODE	TUBE Ø
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic or RPE/ALU

CODE	TUBE Ø
612	12/2
614	14/2
616	16/2
618	18/2

BRIZA 12 1st heat exchanger	BRIZA 12 2nd heat exchanger	BRIZA 22 1st heat exchanger	BRIZA 22 2nd heat exchanger	BRIZA 26 1st heat exchanger	BRIZA 26 2nd heat exchanger	Briza XLNet Zero
--------------------------------	--------------------------------	--------------------------------	--------------------------------	--------------------------------	--------------------------------	------------------


-	-	✓	-	✓	-	✓
-	-	✓	-	✓	-	✓
-	-	✓	-	✓	-	✓
-	-	✓	-	✓	-	✓

-	-	✓	-	✓	-	✓
-	-	✓	-	✓	-	✓

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

TO THE WALL WITH JAGA PRO VALVE

SET 11

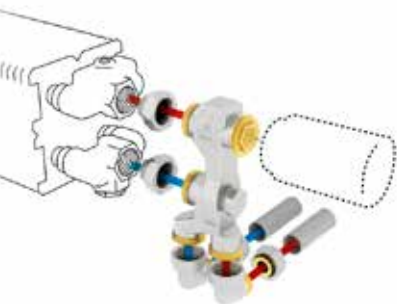

Thermostatic head

Thermostatic head


Heating *

COLO PW2 JW 3...	JW	
COLO PW2 AC 3...	AC	
COLO PW2 AW 3...	AW	
COLO PW2 AS 3...	AS	
COLO PW2 AB 3...	AB	
COLO PW2 JH 3...	JH	


Heating and cooling

COLO PW2 MA 3...	MA	
COLO PW2 HC 3...	HC	

Fill in sleeve coupling code

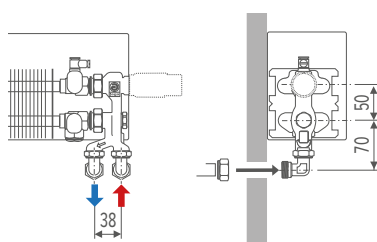

SET 13

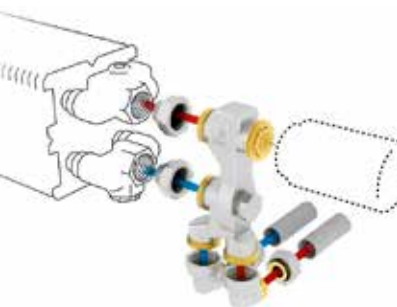

Thermostatic head


Heating *

COLO PW1 JW 3...	JW	
COLO PW1 AC 3...	AC	
COLO PW1 AW 3...	AW	
COLO PW1 AS 3...	AS	
COLO PW1 AB 3...	AB	
COLO PW1 JH 3...	JH	

Heating and cooling

COLO PW1 MA 3...	MA	
COLO PW1 HC 3...	HC	

Fill in sleeve coupling code

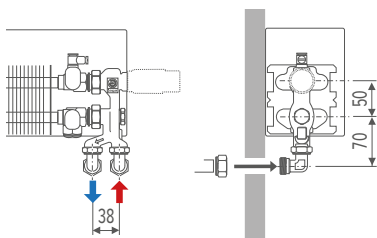[illegible]

ORDERING EXAMPLE

connection set code sleeve coupling code

COLO PW2 JW 3 110

Precision metal tube

CODE	TUBE Ø
110	10/1
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic

CODE	TUBE Ø
212	12/2
214	14/2
219	16/1.5
216	16/2
217	17/2
218	18/2

VPE/ALU

CODE	TUBE Ø
314	14/2
316	16/2
326	16/2.2
318	18/2

Steel tube for c.h.

CODE	TUBE Ø
501	M24 x 1/2"
503	M24 x 3/8"

TO THE WALL WITH JAGA VALVE

** Also suited for Light Cooling when combined with adaptor 5090 1114.*

To the wall
Controls below
Kv 0.1 - 0.6 m³/h at $\Delta p = 1$ bars
KVS 0.8
Two pipe


Heating *

COLO SW2 JW 3...	JW	
COLO SW2 AC 3...	AC	
COLO SW2 AW 3...	AW	
COLO SW2 AS 3...	AS	
COLO SW2 AB 3...	AB	
COLO SW2 JH 3...	JH	

Heating and cooling

COLO SW2 MA 3...	MA	
COLO SW2 HC 3...	HC	

Fill in sleeve coupling code

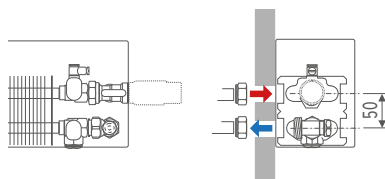[illegible]

ORDERING EXAMPLE

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code *sleeve coupling code*

COLO SW2 JW 3 110

Precision metal tube

CODE	TUBE Ø
110	10/1
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic

CODE	TUBE Ø
212	12/2
214	14/2
219	16/1.5
216	16/2
217	17/2
218	18/2

RPE/ALU

CODE	TUBE Ø
314	14/2
316	16/2
326	16/2.2
318	18/2

Steel tube for c.h.

CODE	TUBE Ø
501	M24 x 1/2"
503	M24 x 3/8"

CONNECTION SETS M24

TO THE WALL

* Also suited for Light Cooling when combined with adaptor 5090 1114.

SET 28



To the wall
Controls below
Connection on the right
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
Ex.: STRW 050 100 16 00

Thermostatic head

Heating *

COLO HWR RD 3....

RD



COLO HWR RW 3....

RW



Heating and cooling

COLO HWR MA 3....

MA



COLO HWR 24 3....

24 (24 VDC)





COLO HWR 23 3....

23 (230 VAC)



Fill in sleeve coupling code



SET 29



To the wall
Controls below
Connection on the left
Kv 0.1 - 0.6 m³/h at Δp = 1 bars
KVS 0.8
Two pipe

The radiator does not require an opening for the thermostatic head: please add 00 to end of radiator ordering code.
ex.: STRW 050 100 16 00

Thermostatic head

Heating *

COLO HWL RD 3....

RD



COLO HWL RW 3....

RW



Heating and cooling

COLO HWL MA 3....

MA



COLO HWL 24 3....

24 (24 VDC)





COLO HWL 23 3....

23 (230 VAC)



Fill in sleeve coupling code



SLEEVE COUPLING CODES M24

ORDERING EXAMPLE

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
COLO HWR RD 3 110

Precision metal tube

CODE	TUBE Ø
110	10/1
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic

CODE	TUBE Ø
212	12/2
214	14/2
219	16/1.5
216	16/2
217	17/2
218	18/2

RPE/ALU


CODE	TUBE Ø
314	14/2
316	16/2
326	16/2.2
318	18/2

Steel tube for c.h.

CODE	TUBE Ø
501	M24 x 1/2"
503	M24 x 3/8"

CONNECTION SETS EUROCONE

SET 143



To the wall or the floor
Automatic flow limiter (0.01 - 0.34)

Thermostatic head		
Heating only		
COLO MHG AW 4...	AW	
COLO MHG AB 4...	AB	
COLO MHG AC 4...	AC	
COLO MHG JH 4...	JH	
COLO MHG JW 4...	JW	
Heating and cooling		
COLO MHG AW 5...	AW	+
COLO MHG AB 5...	AB	+
COLO MHG HC 5...	HC	
COLO MHG 24 5...	24 (24 VDC)	
COLO MHG 23 5...	23 (230 VAC)	
Manual		
COLO MHG MA 4...	MA	

Fill in sleeve coupling code

VERTIGA HYBRID	VERTILINA HYBRID
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓

SLEEVE COUPLINGS EUROCONE

ORDERING EXAMPLE
Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code
COLO MHG AW 4 112

Precision metal tube		Synthetic or RPE/ALU	
CODE	TUBE Ø	CODE	TUBE Ø
112	12/1	612	12/2
114	14/1	614	14/2
115	15/1	616	16/2
116	16/1	618	18/2
118	18/1		

CODE	TUBE Ø
615	15/2.5
619	16/1.5
620	20/2

CONNECTION SETS M24

** Also suited for Light Cooling when combined with adaptor 5090 1114.*

SET 41



To the wall

Two pipe: Kv 0.29 - 1.61 m³/h at Δp = 1 bars
KVS 1.65

One pipe: Kv 1.50 - 2.20 m³/h at Δp = 1 bars
KVS 2.20

Thermostatic head

Heating *

CODE PW3 AC 1...	AC	
CODE PW3 AW 1...	AW	
CODE PW3 AS 1...	AS	
CODE PW3 AB 1...	AB	

Heating and cooling

CODE PW3 HC 1...	HC	
------------------	----	---

Fill in sleeve coupling code

** Also suited for Light Cooling when combined with adaptor 5090 1114.*

SET 42



To the floor

Two pipe: Kv 0.29 - 1.61 m³/h at Δp = 1 bars
KVS 1.65

One pipe: Kv 1.50 - 2.20 m³/h at Δp = 1 bars
KVS 2.20

Thermostatic head

Heating *

CODE PF3 AC 1...	AC	
CODE PF3 AW 1...	AW	
CODE PF3 AS 1...	AS	
CODE PF3 AB 1...	AB	

Heating and cooling

CODE PF3 HC 1...	HC	
------------------	----	---

Fill in sleeve coupling code

VERTIGA HYBRID

✓
✓
✓
✓
✓

VERTILINA HYBRID

✓
✓
✓
✓
✓

✓
✓
✓
✓
✓

✓
✓
✓
✓
✓

SLEEVE COUPLING CODES M24

ORDERING EXAMPLE

Add the code of the connection set to the clamp couplings code. These depend on the type of pipe that was used and its Ø. Included in the price of the connections sets.

connection set code sleeve coupling code

CODE PF3 AC 1 110

Precision metal tube

CODE	TUBE Ø
110	10/1
112	12/1
114	14/1
115	15/1
118	18/1

Synthetic

CODE	TUBE Ø
212	12/2
219	16/1.5
216	16/2
217	17/2
218	18/2

RPE/ALU

CODE	TUBE Ø
314	14/2
316	16/2
326	16/2.2
318	18/2

Steel tube for c.h.

CODE	TUBE Ø
501	M24 x 1/2"
503	M24 x 3/8"

jaga

CLIMATE
DESIGNERS

SEPERATE VALVES






JAGA H-VALVE 3/4" EUROCONE

- connection 3/4" Eurocone male thread
- one pipe and two pipe
- default setting in 6 steps
- 2 integrated lockshields and lockable by-pass
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site
- not suitable for Strada type 06, Knockonwood type 06 connection to the wall

standard kv-value two pipe: 0.10 to 0.60 m³/h
reduced kv-value two pipe: 0.045 to 0.32 m³/h
one pipe: 25% to 100%


ADJUSTING THE H-BLOCK (ONE PIPE - TWO PIPE): SEE PAGE XXX

TO THE WALL - STRAIGHT

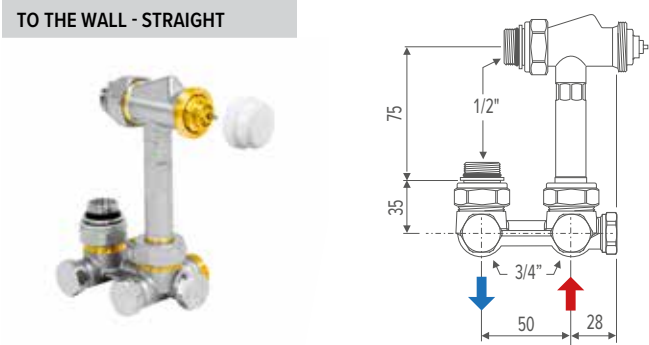

CODE	
5094 524	Standard Kv
5094 544	Reduced Kv


TO THE WALL - ANGLED

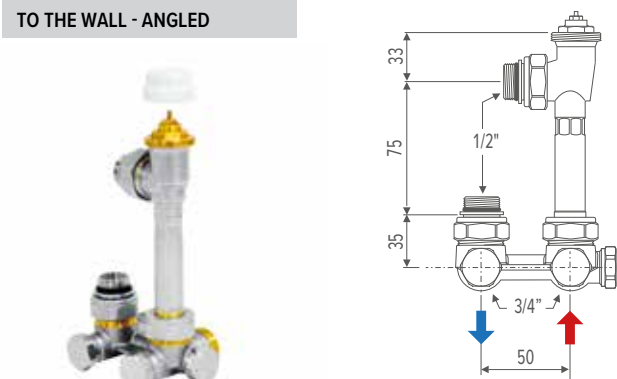

CODE	
5094 534	Standard Kv
5094 554	Reduced Kv


The Jaga angled valve is only suited for use with a sensor or remote thermostatic radiator valve, or central control system (manual radiator valve).

TO THE FLOOR - STRAIGHT

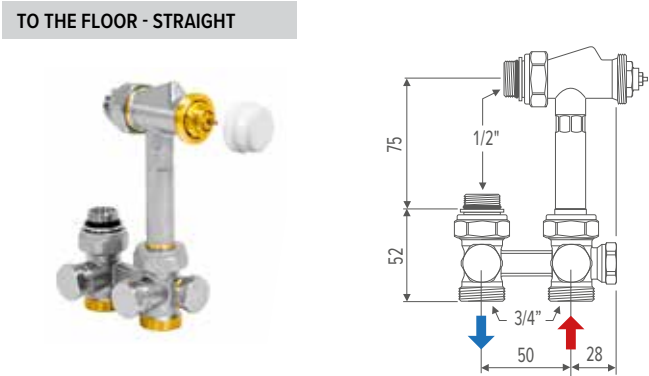

CODE	
5094 525	Standard Kv
5094 545	Reduced Kv

TO THE FLOOR - ANGLED

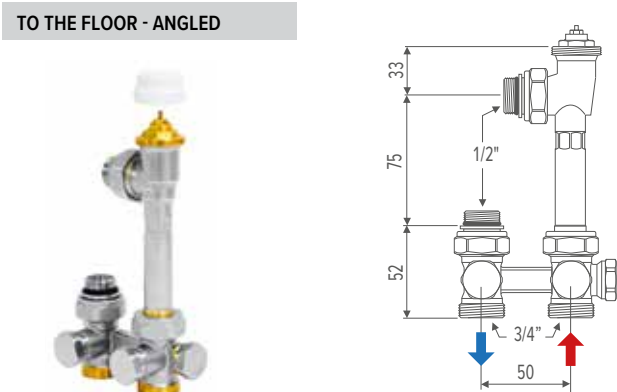

CODE	
5094 535	Standard Kv
5094 555	Reduced Kv

The Jaga angled valve is only suited for use with a sensor or remote thermostatic radiator valve, or central control system (manual radiator valve).


	SET 103	SET 104	SET 113	SET 114	SET 117	SET 118
	✓	•	•	•	•	•
	•	•	✓	•	✓	•
	•	✓	•	•	•	•
	•	•	•	✓	•	✓

JAGA CROSSFLOW VALVE 3/4" EUROCONE

- connection 3/4" Eurocone male thread
- two pipe
- default setting in 6 steps
- flow and return completely lockable
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site
- not suitable for Strada type 06, Knockonwood type 06 connection to the wall


standard kv-value: 0.10 to 0.60 m³/h
reduced kv-value: 0.045 to 0.32 m³/h

TO THE WALL - STRAIGHT



CODE	
5094 522	Standard Kv
5094 542	Reduced Kv


TO THE WALL - ANGLED

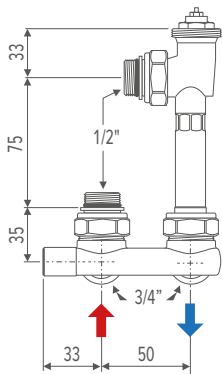

CODE	
5094 532	Standard Kv
5094 552	Reduced Kv


The Jaga angled valve is only suited for use with a sensor or remote thermostatic radiator valve, or central control system (manual radiator valve).

TO THE FLOOR - STRAIGHT



CODE	
5094 523	Standard Kv
5094 543	Reduced Kv

TO THE FLOOR - ANGLED

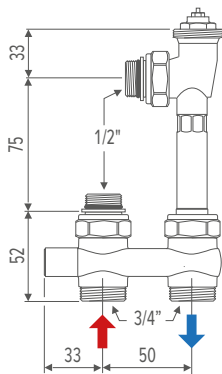

CODE	
5094 533	Standard Kv
5094 553	Reduced Kv

The Jaga angled valve is only suited for use with a sensor or remote thermostatic radiator valve, or central control system (manual radiator valve).


	SET 101	SET 102	SET 111	SET 112	SET 115	SET 116
	✓	•	•	•	•	•
	•	•	•	•	•	•
	•	•	✓	•	✓	•
	•	•	•	•	•	•
	•	✓	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	✓	•	✓
	•	•	•	•	•	•

JAGA VALVE 3/4" EUROCONE

- specially shortened thermostatic valve in order to be fully concealed within the casing
- connection 3/4" Eurocone male thread
- two pipe
- default setting in 6 steps
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site

standard kv-value: 0.10 to 0.60 m³/h
reduced kv-value: 0.045 to 0.32 m³/h (identification: red coloured spindle protection)

TO THE WALL OR THE FLOOR



CODE	
5090 4407	Standard Kv
5090 4406	Reduced Kv


SET 222	✓
SET 225	✓
SET 271	✓
SET 272	✓
SET 295	✓

JAGA VALVE 3/4” EUROCONE STRAIGHT

- connection 3/4” Eurocone male thread
- two pipe
- default setting in 6 steps
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site

standard kv-value: 0.10 to 0.60 m³/h


STRAIGHT



CODE
5094 4430


JAGA RETURN VALVES 3/4” EUROCONE

ANGLED



CODE
5090 4111

STRAIGHT



CODE
5094 4431

SET 222	SET 225	SET 226	SET 282	SET 285	SET 271	SET 272	SET 290	SET 291	SET 294	SET 295
-	-	-	-	-	-	-	-	-	✓	-
-	✓	✓	-	✓	-	✓	-	-	-	-
✓	-	-	✓	-	✓	-	✓	✓	✓	✓

JAGA VALVE 3/4" EUROCONE

JAGA GAMPPER VARIO DP DYNAMIC VALVE 3/4" EUROCONE

- integrated automatic flow limiter, independent of the differential pressure
- easy and quick flow sizing without complicated calculations
- continuously balancing TRV between 1 (20 l/h) and 8 (340 l/h)
- specially shortened thermostatic valve in order to be fully concealed within the casing
- connection 3/4" Eurocone male thread
- two pipe
- 100 % closable
- with screw thread M30 x 1.5
- with Keymark certification
- tested to DIN EN 215
- with synthetic spindle protection for setting on site


SETTINGS



	1	1.5	2	2.25	2.5	2.75	3	3.25	3.5	3.75	4	4.25	4.5	4.75
l/h	20	25	35	40	45	55	65	80	90	100	115	135	145	160
P-BAND (K)	1	1	1	1	1	2	2	2	2	2	2	1	2	2

	5	5.25	5.5	5.75	6	6.25	6.5	6.75	7	7.25	7.5	7.75	8
l/h	170	185	200	215	230	245	260	275	290	300	315	330	340
P-BAND (K)	3	3	3	3	3	3	3	3	3	3	3	3	3


TO THE WALL OR THE FLOOR



CODE

5090 3407


HAAKS



CODE

5092 423

RETOURVENTIEL RECHT



CODE

5092 421

SET 285

SET 282

SET 275

✓

✓

-

-

-

✓

-

-

✓

JAGA VALVE 1/2" FEMALE THREAD

JAGA GAMPPER VARIO DP DYNAMIC VALVE 1/2" FEMALE THREAD

- integrated automatic flow limiter, independent of the differential pressure
- easy and quick flow sizing without complicated calculations
- continuously balancing TRV between 1 (20 l/h) and 8 (340 l/h)
- specially shortened thermostatic valve in order to be fully concealed within the casing
- connection 1/2" female thread
- two pipe
- 100 % closable
- with screw thread M30 x 1.5
- with Keymark certification
- tested to DIN EN 215
- with synthetic spindle protection for setting on site




settings

	1	1.5	2	2.25	2.5	2.75	3	3.25	3.5	3.75	4	4.25	4.5	4.75
l/h	20	25	35	40	45	55	65	80	90	100	115	135	145	160
P-BAND (K)	1	1	1	1	1	2	2	2	2	2	2	1	2	2

	5	5.25	5.5	5.75	6	6.25	6.5	6.75	7	7.25	7.5	7.75	8
l/h	170	185	200	215	230	245	260	275	290	300	315	330	340
P-BAND (K)	3	3	3	3	3	3	3	3	3	3	3	3	3


TO THE WALL OR THE FLOOR



CODE

5090 3405


RECHT



CODE

5092 623


HAAKS



CODE

5092 633

RETOURVENTIEL RECHT



CODE

5090 621


SET 181
SET 182
SET 183
SET 184
SET 75
SET 185
SET 186
SET 187
SET 188

✓	✓	✓	✓	-	-	-	-	-
-	-	-	-	✓	-	-	-	-
-	-	-	-	-	✓	✓	✓	✓
-	-	-	-	✓	-	-	-	-

H-BLOCK WITH TAIL-PIECE 3/4" EUROCONE


- H-style lower connection block
- straight flow
- connection to radiator G1/2 M
- connection for G3/4 M Eurocone tube
- centre distance 50 mm
- for 1 pipe and 2 pipes
- KV 1 m³/h at delta p 1 bar

TO THE WALL

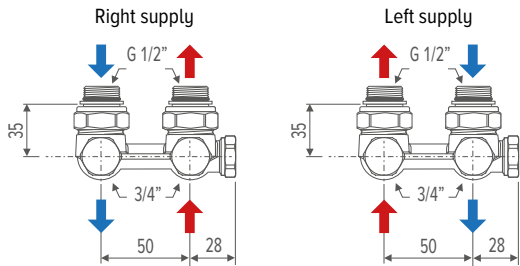



CODE
5094 562

TO THE FLOOR

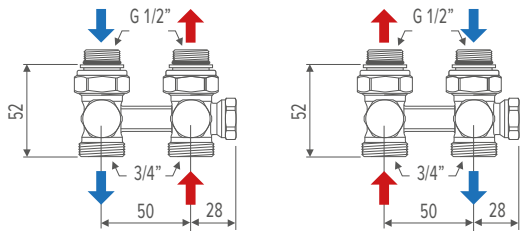

CODE
5094 563


adjusting

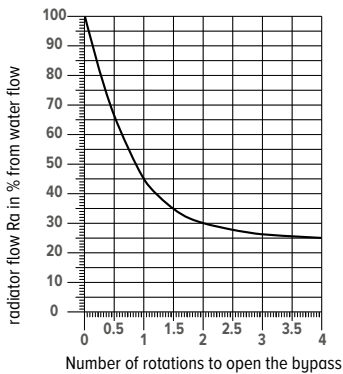

CROSS FLOW BLOCK WITH TAIL-PIECE 3/4" EUROCONE


- lower connection block
- cross-flow
- connection to radiator G1/2 M
- connection for G3/4 M Eurocone tube
- centre distance 50 mm
- for 2 pipes
- KV 1 m³/h at delta p 1 bar

TO THE WALL

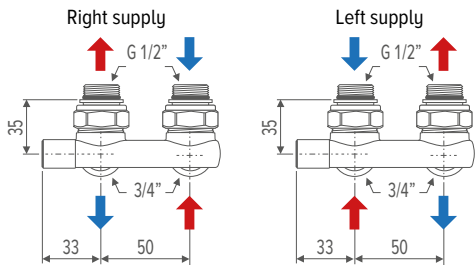

CODE
5094 564

TO THE FLOOR

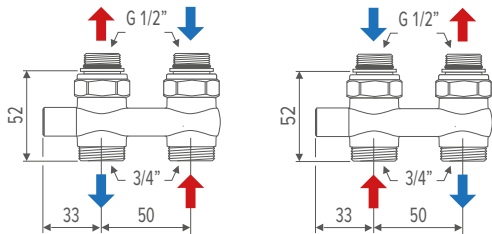

CODE
5094 565

SET 185
SET 186
SET 187
SET 188

✓
✓
✓
✓


✓
✓
✓
✓

JAGA VALVE 1/2" FEMALE THREAD

- specially shortened thermostatic valve in order to be fully concealed within the casing
- connection 1/2" female thread
- two pipe
- default setting in 6 steps
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site

standard kv-value: 0.10 to 0.60 m³/h
reduced kv-value: 0.045 to 0.32 m³/h (identification: red coloured spindle protection)

TO THE WALL OR FLOOR




CODE	
5090 405	Standard Kv
5090 404	Reduced Kv

JAGA VALVE 1/2" FEMALE THREAD WITHOUT DEFAULT SETTING

- special shortened thermostatic valve
- connection 1/2" female thread
- two pipe
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site


standard kv-value: 1 m³/h (identification: red coloured spindle protection)

TO THE WALL OR FLOOR



CODE	
5090 126	

EXTENSION PIECE 1/2" FEMALE THREAD




CODE
5090 108

✓	SET 225
✓	SET 226
✓	SET 285
✓	SET 272
✓	SET 185
✓	SET 186
✓	SET 187
✓	SET 188


JAGA LOCKSHIELD VALVES 1/2" FEMALE THREAD

STRAIGHT



CODE
5090 109


ANGLED



CODE
5090 110

✓	SET 98
✓	SET 99
✓	SET 297
✓	SET 298
✓	SET 299

PUNTSTUK 1/2"



CODE
5090 340

STAINLESS STEEL FLEXIBLE CONNECTIONS 1/2"



Optionally applicable for

- Briza XS Net Zero
- Briza S Net Zero

CODE
7990 068 200 < 260 mm 2 units

STAINLESS STEEL FLEXIBLE CONNECTIONS 3/4"



Optionally applicable for

- Briza XL Net Zero
- Briza 22

CODE
8776 00010002 300 < 600 mm 2 units

EXTENDED AIR VENT 1/8"



Pre-mountend

Add "E" to the order code of the radiator

ex. STRW 050 100 11 133 E

STRADA

	H20				H35				H50				H65				H95								
Type	06	10	15	20	06	10	11	15	16	20	21	06	10	11	15	16	20	21	06	10	11	15	16	20	21
ORDER CODE																									
50900 114 078	-	✓	✓	✓	✓	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50900 114 178	-	-	-	-	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50900 114 278	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-
50900 114 378	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	-	✓	✓	-	✓	-	-	-	-
50900 114 528	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	-	-	-	-
50900 114 728	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓

STRADA HYBRID / LINEA PLUS / LINEA PLUS HYBRID / STRADA HYBRID MM

	H35						H50						H65						H95					
Type	10	11	15	16	20	21	10	11	15	16	20	21	10	11	15	16	20	21	10	11	15	16	20	21
ORDER CODE																								
50900 114 078	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50900 114 178	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50900 114 278	-	-	-	-	-	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
50900 114 378	-	-	-	-	-	✓	-	✓	-	✓	-	✓	-	✓	-	✓	-	✓	-	-	-	-	-	-
50900 114 528	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	-	✓	-	-	-	-	-	-
50900 114 728	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓

TEMPO / TEMPO FREESTANDING / INSTALLATION IN A WALL RECESS / INSTALLATION IN A WALL RECESS HYBRID

	H20				H30				H40				H50				H60				H70				H90								
Type	10	15	20	10	11	15	16	20	21	10	11	15	16	20	21	10	11	15	16	20	21	10	11	15	16	20	21	10	11	15	16	20	21
ORDER CODE																																	
50900 114 078	✓	✓	✓	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
50900 114 178	-	-	-	✓	-	✓	-	✓	-	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
50900 114 278	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	-	-	✓	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	
50900 114 378	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	-	✓	✓	✓	✓	✓	-	✓	-	✓	-	-	
50900 114 528	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	-	-	✓	-	✓	
50900 114 728	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	✓	


KNOCKONWOOD

	H55			
Type	10	11	15	16
ORDER CODE				
50900 114 278	-	✓	-	✓
50900 114 378	✓	-	✓	-

JAGA VALVE DN 20

- two pipe
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site
- for heat exchangers with 3/4" female thread (Briza 22)
- connection 3/4" female thread


ANGLED



CODE
5090 701

Kv-values: 3.4 m³/h at Δp = 1 bars

STRAIGHT



CODE
5090 702

Kv-values: 2.5 m³/h at Δp = 1 bars

SET 301
SET 302

✓ .

✓ ✓


JAGA VALVE DN 20

- two pipe
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site
- for heat exchanger with 1/2" female thread
- connection 3/4" female thread

ANGLED



Kv-values: 3.4 m³/h at Δp = 1 bars




CODE
5090 703

ANGLED



Kv-values: 0.8 m³/h at Δp = 1 bars



CODE
5090 704

SET 303

✓

SET 304

·

JAGA MULTI-H VALVE 3/4" EUROCONUS


- integrated automatic flow limiter, independent of the differential pressure
- easy and quick flow sizing without complicated calculations
- continuously balancing TRV between 1 (20 l/h) and 8 (340 l/h)
- connection 3/4" Eurocone male thread
- two pipe
- radiator valve can be fitted to the left or to the right
- flow left or right, independent from the position of the thermostatic head
- 100 % closable
- with screw thread M30 x 1.5
- with Keymark certification
- tested to DIN EN 215
- with synthetic spindle protection for setting on site



settings		1	1.5	2	2.25	2.5	2.75	3	3.25	3.5	3.75	4	4.25	4.5	4.75
l/h		20	25	35	40	45	55	65	80	90	100	115	135	145	160
P-BAND (K)		1	1	1	1	1	2	2	2	2	2	2	1	2	2

		5	5.25	5.5	5.75	6	6.25	6.5	6.75	7	7.25	7.5	7.75	8
l/h		170	185	200	215	230	245	260	275	290	300	315	330	340
P-BAND (K)		3	3	3	3	3	3	3	3	3	3	3	3	3

JAGA MULTI-H VENTIEL

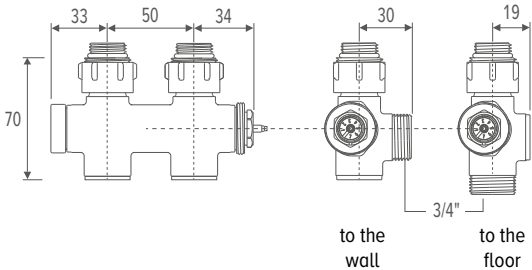


CODE	
5094 4423	nickel-plated

JAGA DECO PRO VALVE M24 19/" CHROME

- suitable for all radiators with connection MM, LL or RR
- for one or two pipe
- radiator valve can be fitted to the left or to the right
- flow left or right, independent from the position of the thermostatic head
- with synthetic spindle protection for setting on site


Kv-values:
- two pipe: Kv 0.29 - 1.65 m³/h
- one pipe: Kv 1.50 - 2.20 m³/h

JAGA DECO PRO

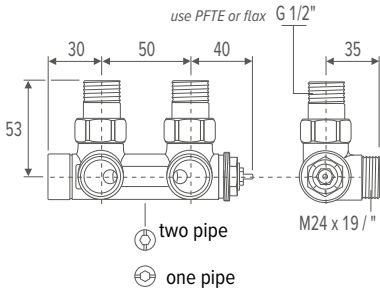

CODE	
5094 427	chrome
5094 432	matte aluminium look
5094 433	brushed stainless steel look

JAGA PRO ANGLED




CODE	
5094 425	chrome
5094 434	matte aluminium look
5094 435	brushed stainless steel look

JAGA PRO VALVE M24 X 1.5 MALE THREAD


- connection M24 male thread
- one pipe and two pipe
- default setting in 6 steps
- flow and return completely lockable
- with screw thread M30 x 1.5 (Heimeier compatible)
- with synthetic spindle protection for setting on site

KV-VALUES:

- two pipe:
- standard kv-value: 0.03 to 0.60 m³/h
- reduced kv-value: 0.045 to 0.2 m³/h (identification: red coloured spindle protection)
- one pipe: 50% to 0%

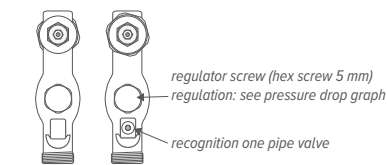


JAGA PRO




CODE	
5094 4414	Two pipe
5094 4409	One pipe
5094 413	Two pipe - reduced Kv

ANGLE 90° M24 X M24



CODE	
5095 020	

REVERSAL PIECE WITH LOCKSHIELDS FOR JAGA PRO VALVES

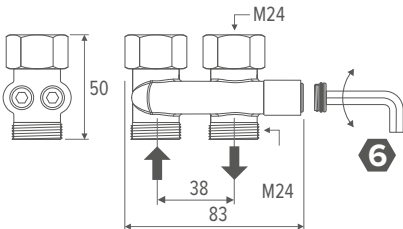

CODE	
5094 520	
Adaptor for renovation to switch flow and return of all Jaga Pro valves. For use with sleeve couplings M24.	

PRO KEY



CODE	
5090 1120	
Tools for simple installation of the Pro valve	

SET 11
SET 12
SET 13
SET 14

✓
✓
✓
✓

✓
-
✓
-

-
-
-
-


SLEEVE COUPLING - NICKEL-PLATED

SLEEVE COUPLINGS EUROCONE

Max tightening torque:


- precision metal tube
 - soft copper 45-55 Nm
 - semi-hard copper 60-80 Nm
 - mild steel 60-70 Nm
- synthetic 30-40 Nm
- RPE/ALU 20-30 Nm

PRECISION METAL TUBE



CODE	DESCRIPTION
5094 2112	Ø 3/4" x 12/1
5094 2114	Ø 3/4" x 14/1
5094 2115	Ø 3/4" x 15/1
5094 2116	Ø 3/4" x 16/1
5094 2118	Ø 3/4" x 18/1

SYNTHETIC OR RPE/ALU




CODE	DESCRIPTION
5094 2612	Ø 3/4" x 12/2
5094 2614	Ø 3/4" x 14/2
5094 2616	Ø 3/4" x 16/2
5094 2618	Ø 3/4" x 18/2
5094 2619	Ø 3/4" x 16/1.5
5094 2820	Ø 3/4" x 20/2

SLEEVE COUPLING 1/2"

Max tightening torque:

- precision metal tube
 - soft copper 45-55 Nm
 - semi-hard copper 60-80 Nm
 - mild steel 60-70 Nm
- synthetic 30-40 Nm
- RPE/ALU 20-30 Nm

PRECISION METAL TUBE




CODE	DESCRIPTION
5098 110	Ø 1/2" x 10/1
5098 112	Ø 1/2" x 12/1
5098 114	Ø 1/2" x 14/1
5098 115	Ø 1/2" x 15/1
5098 116	Ø 1/2" x 16/1
5098 118	Ø 1/2" x 18/1

SHORT COUPLING


5098 015	Ø 1/2" x 15/1
----------	---------------

SYNTHETIC



CODE	DESCRIPTION
5098 212	Ø 1/2" x 12/2
5098 214	Ø 1/2" x 14/2
5098 219	Ø 1/2" x 16/1.5
5098 216	Ø 1/2" x 16/2
5098 217	Ø 1/2" x 17/2
5098 218	Ø 1/2" x 18/2

RPE/ALU



CODE	DESCRIPTION
5098 314	Ø 1/2" x 14/2
5098 316	Ø 1/2" x 16/2
5098 326	Ø 1/2" x 16/2.2
5098 318	Ø 1/2" x 18/2

STEEL TUBE FOR C.H.




CODE	DESCRIPTION
5094 502	Ø 1/2" x 1/2"
5094 504	Ø 1/2" x 3/8"

SLEEVE COUPLING CODES M24 X 1.5

Max tightening torque:


- precision metal tube
 - soft copper 45-55 Nm
 - semi-hard copper 60-80 Nm
 - mild steel 60-70 Nm
- synthetic 30-40 Nm
- RPE/ALU 20-30 Nm

PRECISION METAL TUBE




CODE	DESCRIPTION
5094 110	Ø M24 x 10/1
5094 112	Ø M24 x 12/1
5094 114	Ø M24 x 14/1
5094 115	Ø M24 x 15/1
5094 116	Ø M24 x 16/1
5094 118	Ø M24 x 18/1

SYNTHETIC




CODE	DESCRIPTION
5094 212	Ø M24 x 12/2
5094 214	Ø M24 x 14/2
5094 219	Ø M24 x 16/1.5
5094 216	Ø M24 x 16/2
5094 217	Ø M24 x 17/2
5094 218	Ø M24 x 18/2

RPE/ALU



CODE	DESCRIPTION
5094 314	Ø M24 x 14/2
5094 316	Ø M24 x 16/2
5094 326	Ø M24 x 16/2.2
5094 318	Ø M24 x 18/2

STEEL TUBE FOR C.H.



CODE	DESCRIPTION
5094 501	Ø M24 x 1/2"
5094 503	Ø M24 x 3/8"


SLEEVE COUPLING - CHROME-PLATED

SLEEVE COUPLING CODES M24 X 19/''

Max tightening torque:


- precision metal tube
 - soft copper 45-55 Nm
 - semi-hard copper 60-80 Nm
 - mild steel 60-70 Nm
- synthetic 30-40 Nm
- RPE/ALU 20-30 Nm

PRECISION METAL TUBE




CODE	DESCRIPTION
5094 1110	Ø M24 x 10/1
5094 1112	Ø M24 x 12/1
5094 1114	Ø M24 x 14/1
5094 1115	Ø M24 x 15/1
5094 1118	Ø M24 x 18/1

SYNTHETIC




CODE	DESCRIPTION
5094 1212	Ø M24 x 12/2
5094 1219	Ø M24 x 16/1.5
5094 1216	Ø M24 x 16/2
5094 1217	Ø M24 x 17/2
5094 1218	Ø M24 x 18/2

RPE/ALU



CODE	DESCRIPTION
5094 1314	Ø M24 x 14/2
5094 1316	Ø M24 x 16/2
5094 1326	Ø M24 x 16/2.2
5094 1318	Ø M24 x 18/2

STEEL TUBE FOR C.H.



CODE	DESCRIPTION
5094 1501	Ø M24 x 1/2''
5094 1504	Ø M24 x 3/8''

THERMOSTATIC HEADS

JAGA DECO THERMOSTATIC HEAD




Jaga white RAL 9016



Jaga black



Jaga chrome



- liquid filled
- frost protection 7°C
- regulable fom 10 to 28°C
- screwable M30 x 1.5
- max water flow temperature 110°C


CODE

5090 1150	White RAL 9016
5090 1153	Black
5090 1151	Chrome

JAGA HEIMEIER THERMOSTATIC HEAD HEATING AND COOLING




white RAL 9016



- VT-score: 0.20
- hysteresis EN215: 0 15 K
- water temperature influence EN215: 0 35 K
- liquid filled
- scale division 1 to 5 + K. (Light Cooling)
- frost protection 6°C
- min. and max. temperature control by economy clips
- screwable M30 x 1.5
- max. element temperature +50°C
- adaptor 5090 114 not applicable

CODE


5090 1161	White RAL 9016
-----------	----------------



JAGA HEIMEIER THERMOSTATIC HEAD




white RAL 9016



- VT-score: 0.20
- hysteresis EN215: 0 15 K
- water temperature influence EN215: 0 35 K
- liquid filled
- regulable fom 6 to 28 °C
- frost protection 6°C
- min. and max. temperature control by economy clips
- screwable M30 x 1.5
- max water flow temperature 120°C
- Light Cooling only with adaptor 5090 114

CODE


5090 1160	White RAL 9016
-----------	----------------



JAGA MANUAL HEAD



white RAL 9016



CODE

5090 110103	White RAL 9010
-------------	----------------

JAGA THERMOSTATIC HEAD



white RAL 9016




- liquid filled
- frost protection 6°C
- min. and max. temperature 5-26 °C control by ring-system
- screwable M30 x 1.5
- max water flow temperature 110°C

CODE

5090 1125	White RAL 9016
-----------	----------------

THERMOSTATIC HEADS

THERMOELECTRIC ACTUATOR



- screw-on M30 x 1.5 with snap-on connection, suitable for all Jaga valves
- with varistor to protect against overvoltage
- with position indicator (open/closed)
- cable length: 1 m
- max water flow temperature: 100°C
- isolation class: IP 54 / III
- CE compliant EN 60730

CODE

8727 0202	24 VDC
7990 4091	230 VAC




230 VAC: in case of floor recessed installation, only mount on the distributor, never in the duct

JAGA DANFOSS CLOCK THERMOSTAT



white RAL 9010




- thermostaatkop met afstandbediening voor moeilijk te bereiken afsluiters
- length capillary tube: 2 m
- throughput capillary: at least 23 mm
- remote sensor, capillary tube and control bar are completely filled with fluid
- frost protection 7.5°C
- min and max T° limitation (6-28°C)
- screwable M30 x 1.5
- max water flow temperature 120°
- Light Cooling only with adaptor 5090 114

CODE

5090 1071	White RAL 9010
-----------	----------------

JAGA CLOCK THERMOSTAT



- thermostatic radiator valve with remote control for hard to reach valves
- length capillary tube: 2 m
- minimum inner diameter tube for throughput capillary: 18 mm

CODE

5090 110701



use this wall thermostat only in combination with supplied 2 m-capillary tube

THEFT PROTECTION




white RAL 9016

- theft protection for Jaga thermostatic heads: 5090 1125
- setting the temperature remains possible.
- not applicable with Knockonwood and Strada in combination with a Jaga Pro valve

CODE

5090 1118	White RAL 9016
-----------	----------------


JAGA ADAPTOR FOR THERMOSTATIC HEADS IN HYBRID INSTALLATIONS

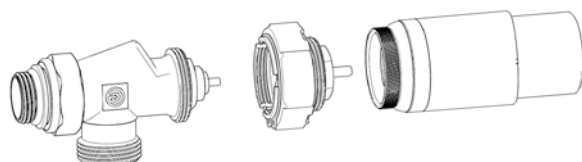

adaptor for converting thermostatic valves with a thermostatic head, to prevent the cold water supply from being cut off by the thermostatic head in summer

CODE

5090 1114



PRESSURE DROP

TWO PIPE - STANDARD KV

PRE-SETTING	1	2	3	4	5	6	KVS
KV	0.10	0.20	0.30	0.40	0.50	0.60	0.80
2-PIPE	✓	✓	✓	✓	✓	✓	-

JAGA H-VALVE
WALL
5094.524



Set: 103

JAGA H - VALVE
FLOOR
5094.525



Set: 104

JAGA H-VALVE
ANGLED WALL
5094.534



Set: 113, 117

JAGA H-VALVE
ANGLED FLOOR
5094.535



Set: 114, 118

JAGA CROSSFLOW
VALVE WALL
5094.522



Set: 101, 115

JAGA CROSSFLOW
VALVE FLOOR
5094.523



Set: 102

JAGA CROSSFLOW
ANGLED VALVE WALL
5094.532



Set: 111

JAGA CROSSFLOW
ANGLED VALVE
FLOOR
5094.533



Set: 112, 116

JAGA VALVE
3/4" EUROCONE
5090.4407



Set: 222, 225, 271, 272

JAGA VALVE
1/2" FEMALE THREAD
5090.405



JAGA DOUBLE
ANGLED VALVE




Set: 28, 29

JAGA VALVE M24



Set: 25

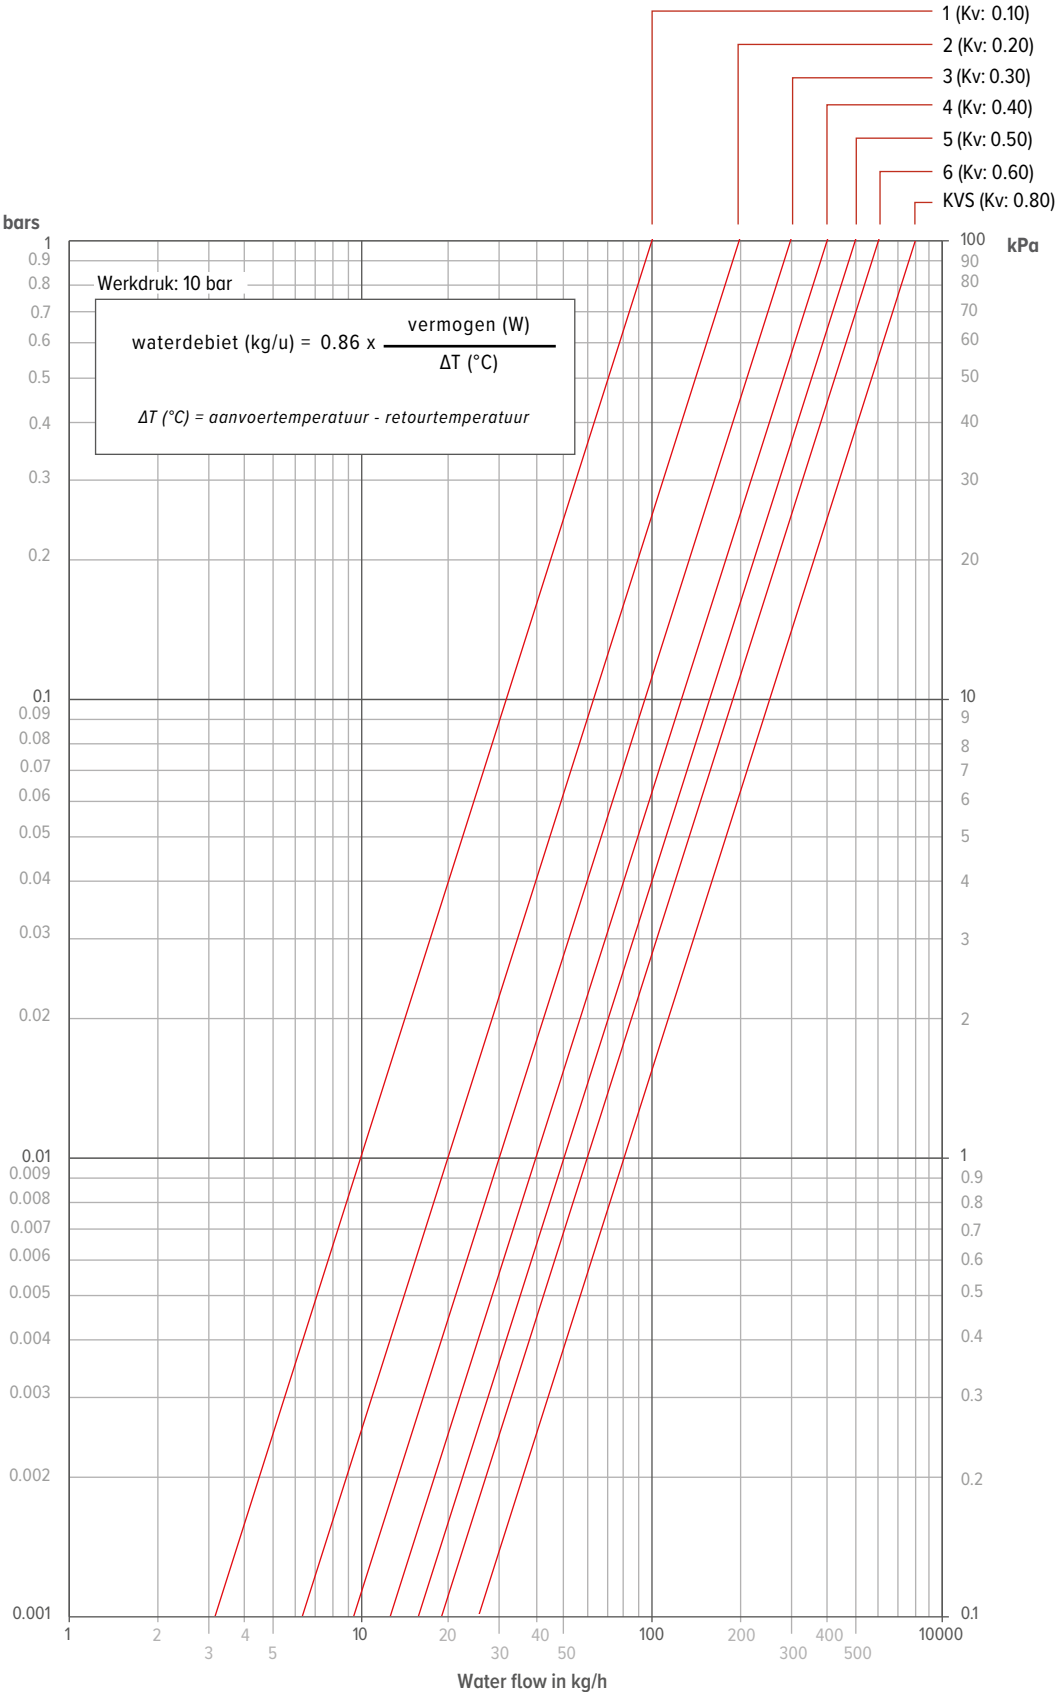

PRESSURE DROP

TWO PIPE - REDUCED KV

PRE-SETTING	1	2	3	4	5	6	KVS
KV	0.045	0.065	0.095	0.155	0.220	0.320	0.350
2-PIPE	✓	✓	✓	✓	✓	✓	-

JAGA H-VALVE WALL
5094.544

JAGA H - VALVE
FLOOR
5094.545



JAGA H-VALVE
ANGLED WALL
5094.554

JAGA H-VALVE
ANGLED FLOOR
5094.555



JAGA CROSSFLOW
VALVE WALL
5094.542

JAGA CROSSFLOW
VALVE FLOOR
5094.543



JAGA CROSSFLOW
ANGLED VALVE WALL
5094.552

JAGA CROSSFLOW
ANGLED VALVE FLOOR
5094.553




JAGA VALVE
3/4" EUROCONE
5090.4406

JAGA VALVE
1/2" FEMALE THREAD
5090.404



JAGA PRO VALVE
M24 MALE THREAD
5094.413

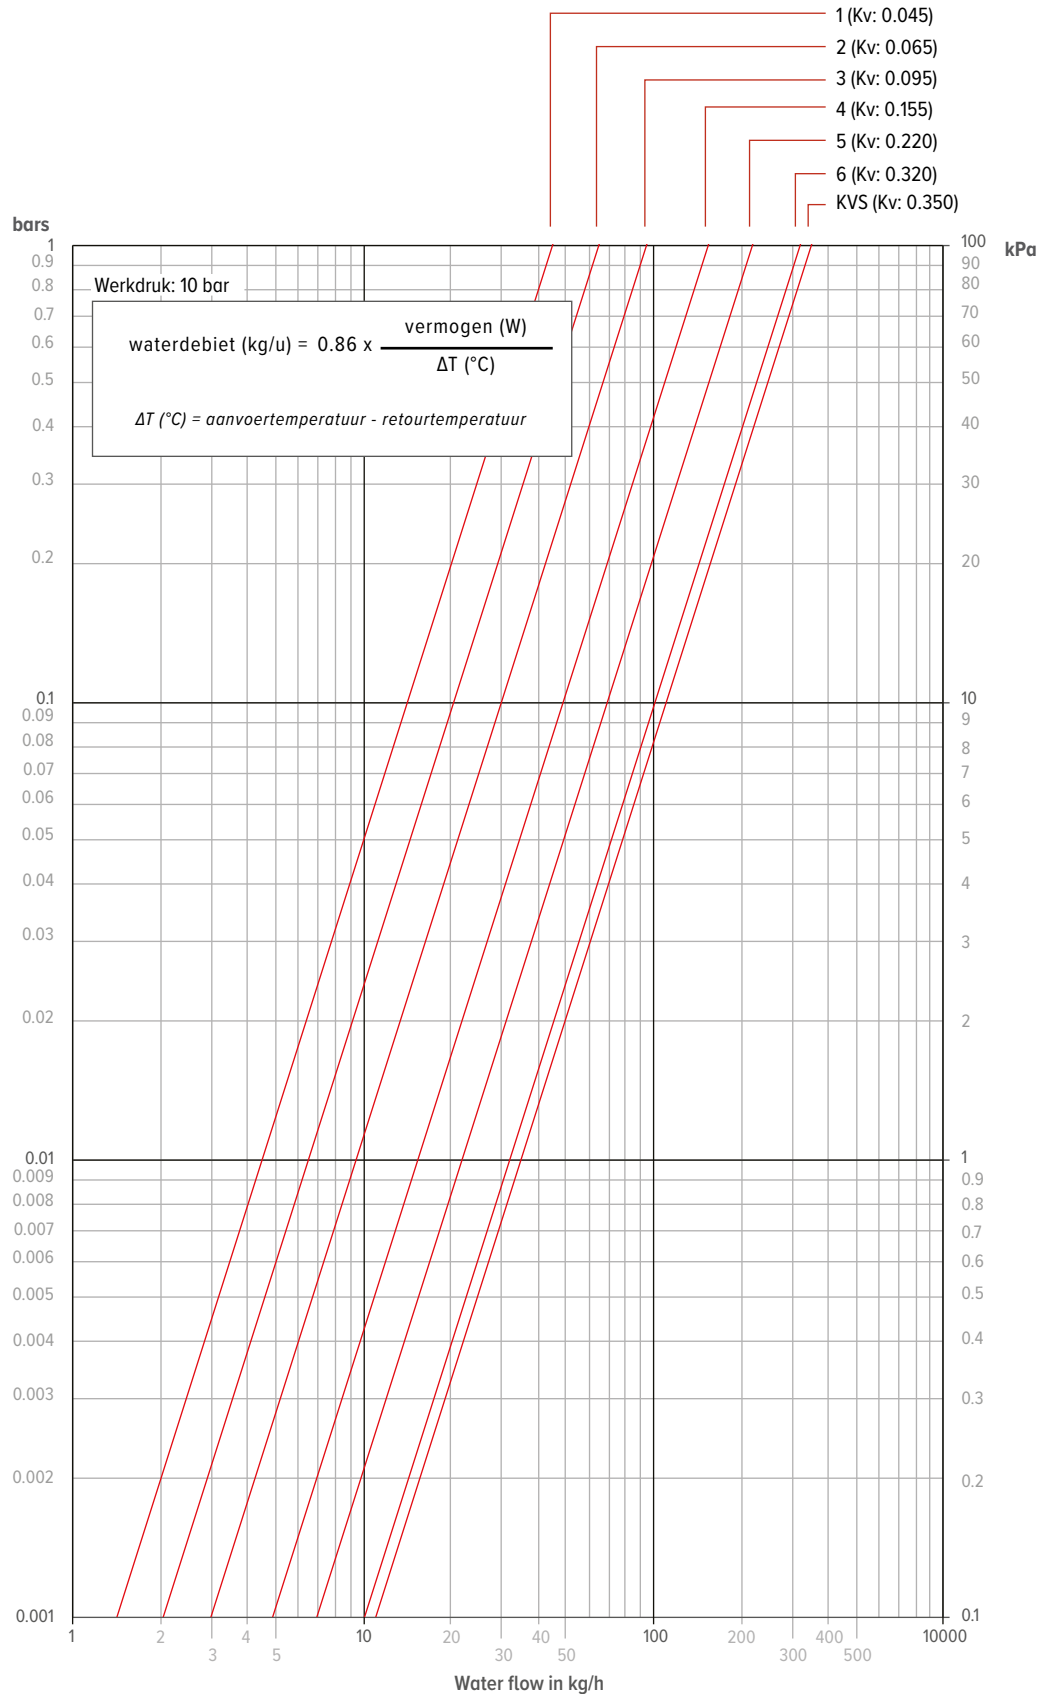

PRESSURE DROP

TWO PIPE


PRE-SETTING	1	2	3	4	5	6	KVS
KV	0.07	0.16	0.32	0.44	0.51	0.60	0.80

JAGA PRO VALVE M24
MALE THREAD

5094.4414



Set 11, 12

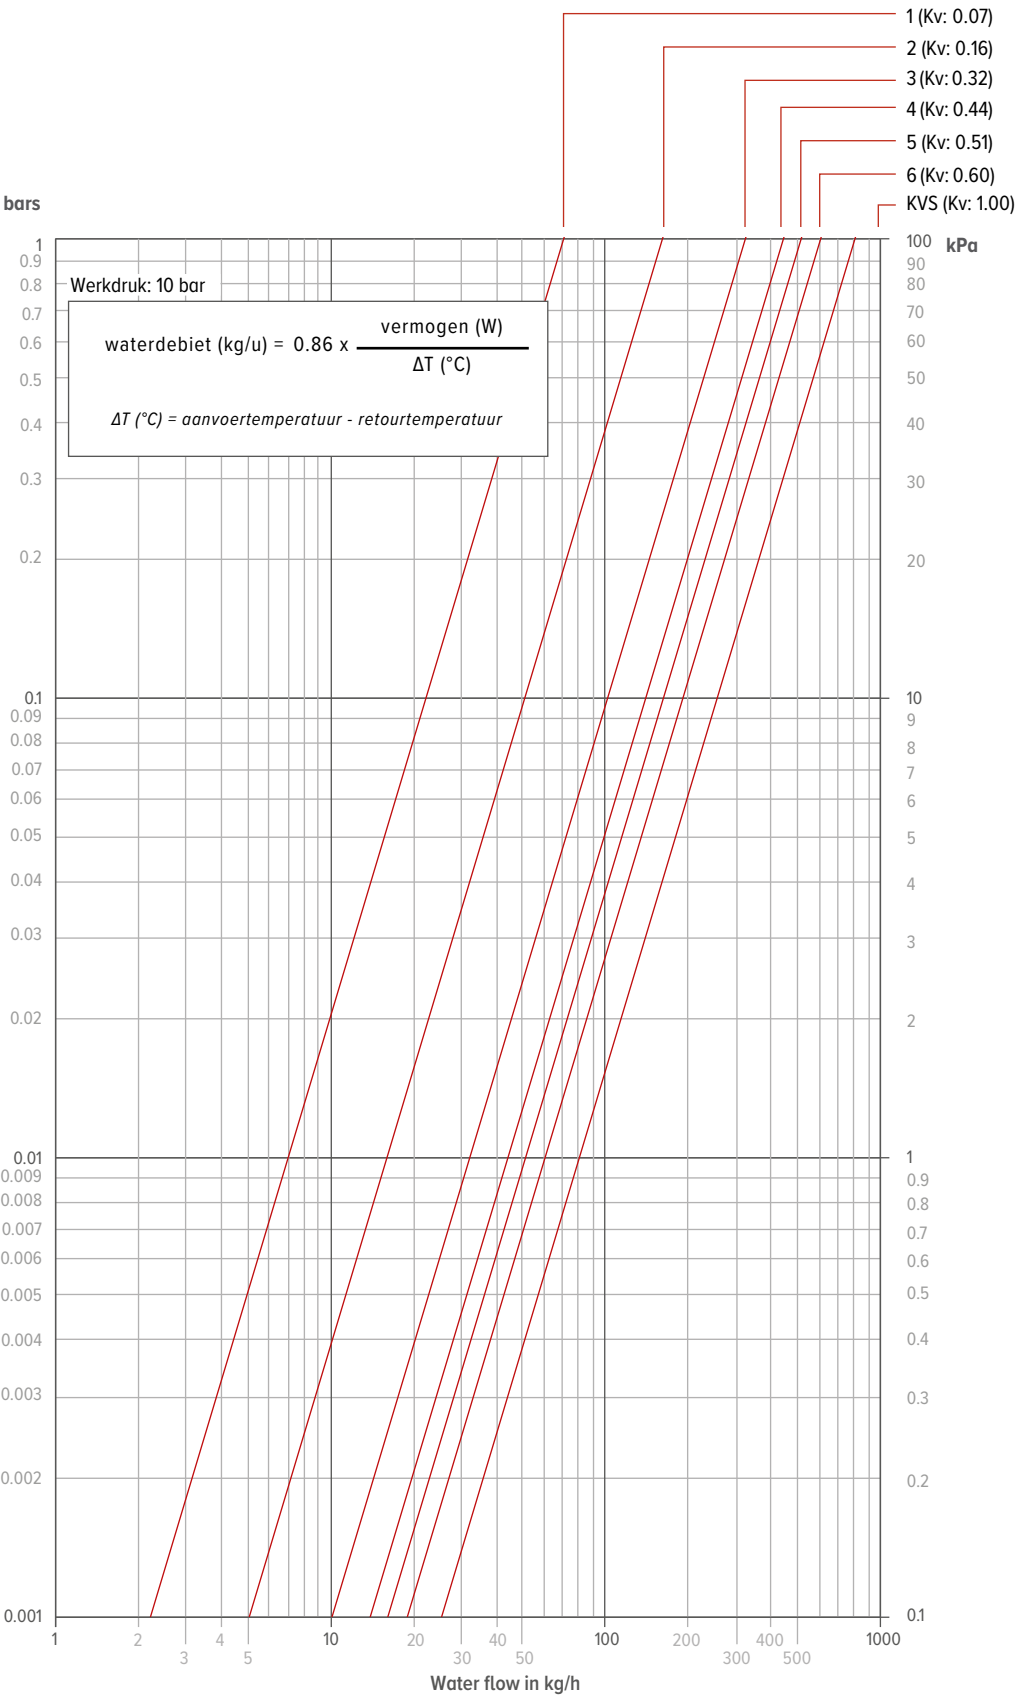

PRESSURE DROP

ONE PIPE


PRE-SETTING	1	2	3	4	5	6	7	8	KVS
RADIATOR FLOW %	0	13.4	17.3	21.9	27.4	31.3	32.8	35.1	50.0
KV	1.34	1.55	1.62	1.72	1.85	1.95	2.00	2.06	2.68

JAGA PRO VALVE M24
MALE THREAD

5094.4414



Set 13, 14

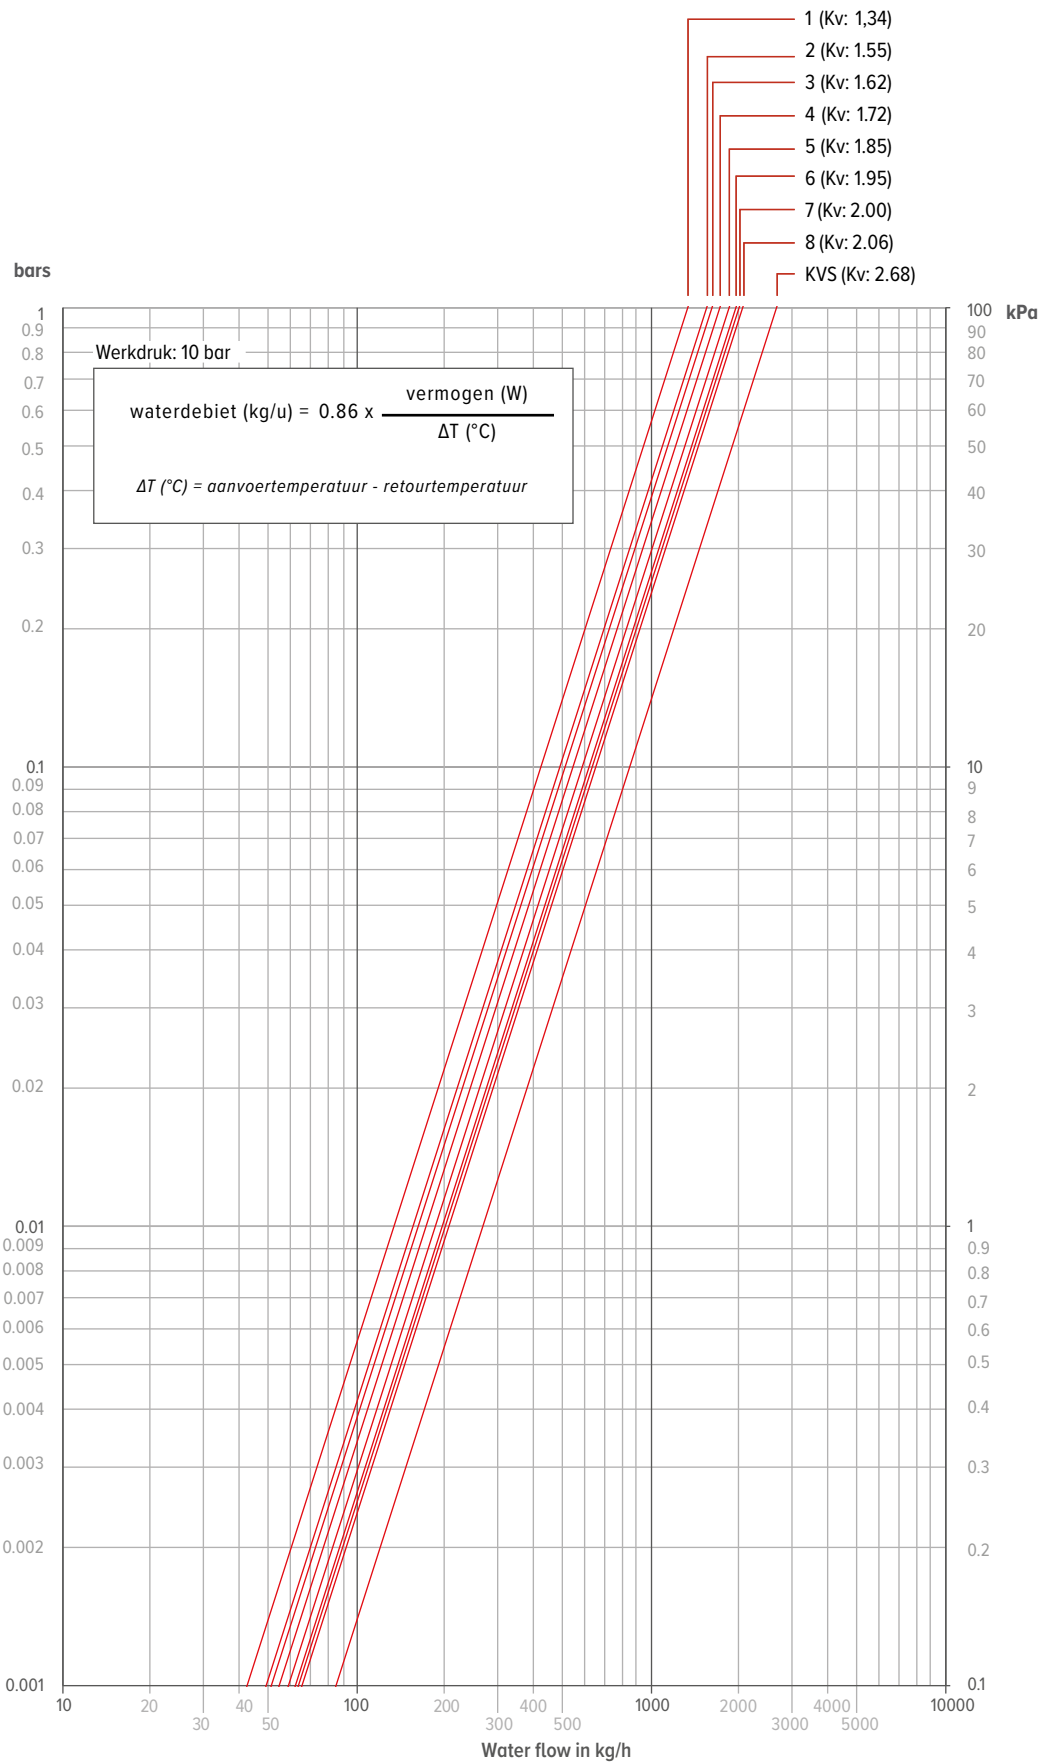

PRESSURE DROP

NUMBER OF ROTATIONS	2	3	4	open
KV	0.8	1.5	2.1	2.5

JAGA RETURN VALVES 3/4" EUROCONE STRAIGHT
5090 702




Set 301, 302

JAGA RETURN VALVES 3/4" EUROCONE ANGLED
5090 704



Set 303, 304

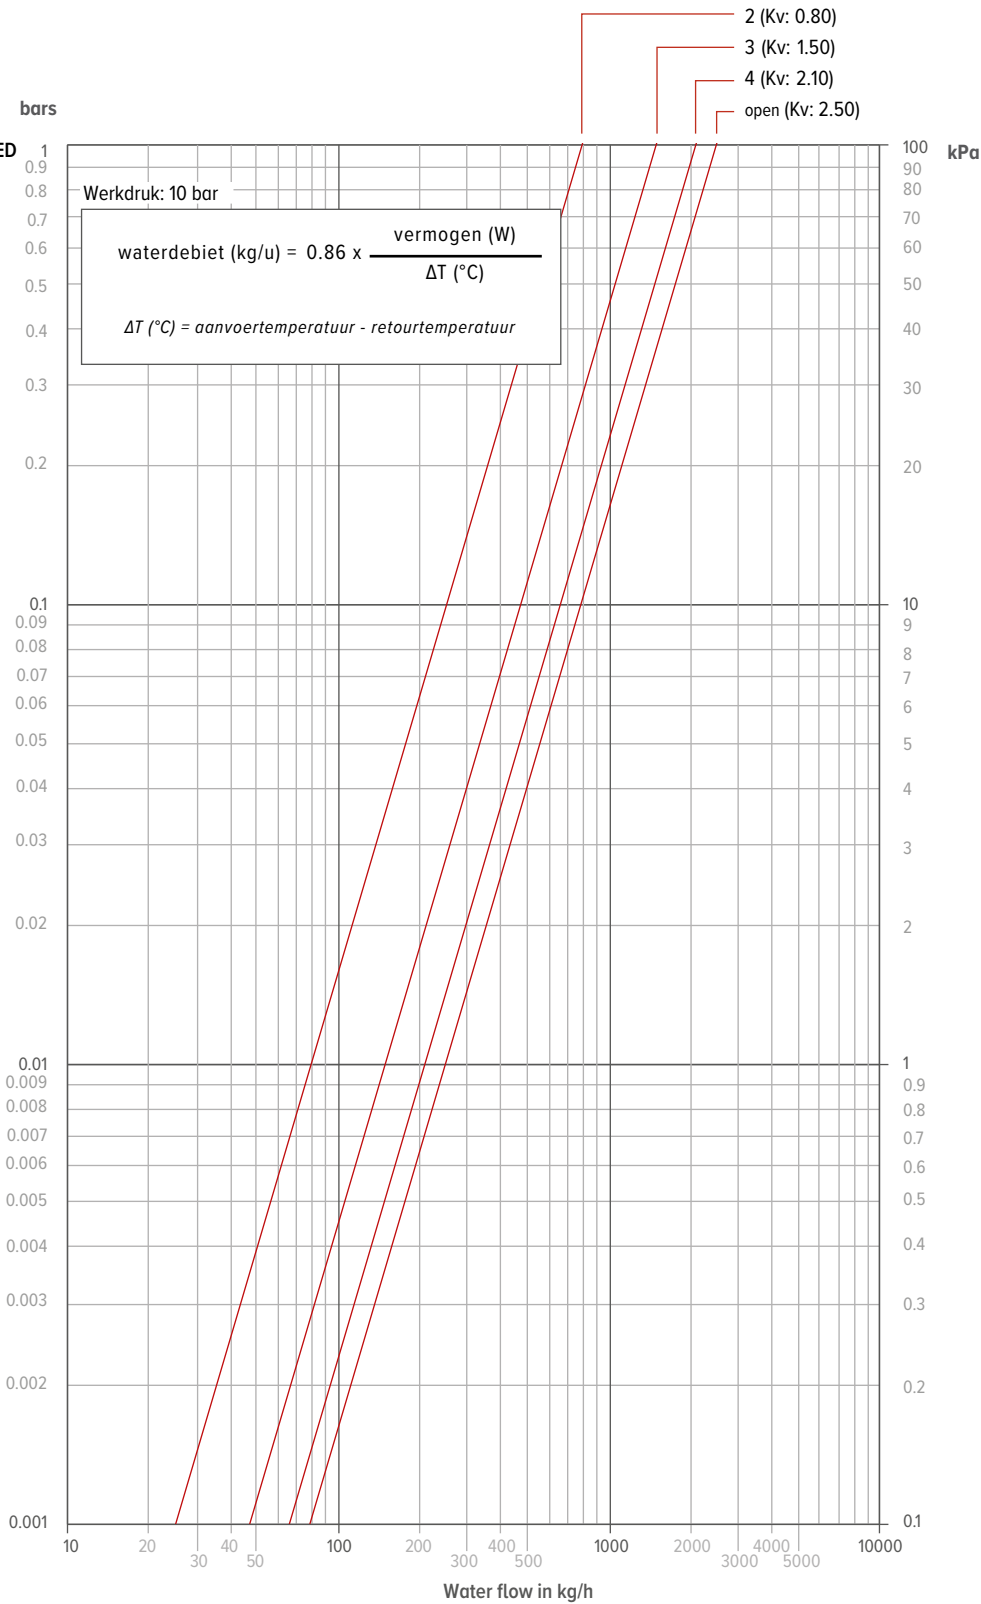

PRESSURE DROP

KV	3.4
----	-----

JAGA VALVE 3/4" MALE THREAD
DN 20 ANGLED FOR 3/4" RADIATOR
CONNECTION
5090 701




Set 301

JAGA 3/4" VALVE FEMALE THREAD
DN20 ANGLED FOR 1/2" RADIATOR
CONNECTION
5090 702



Set 303

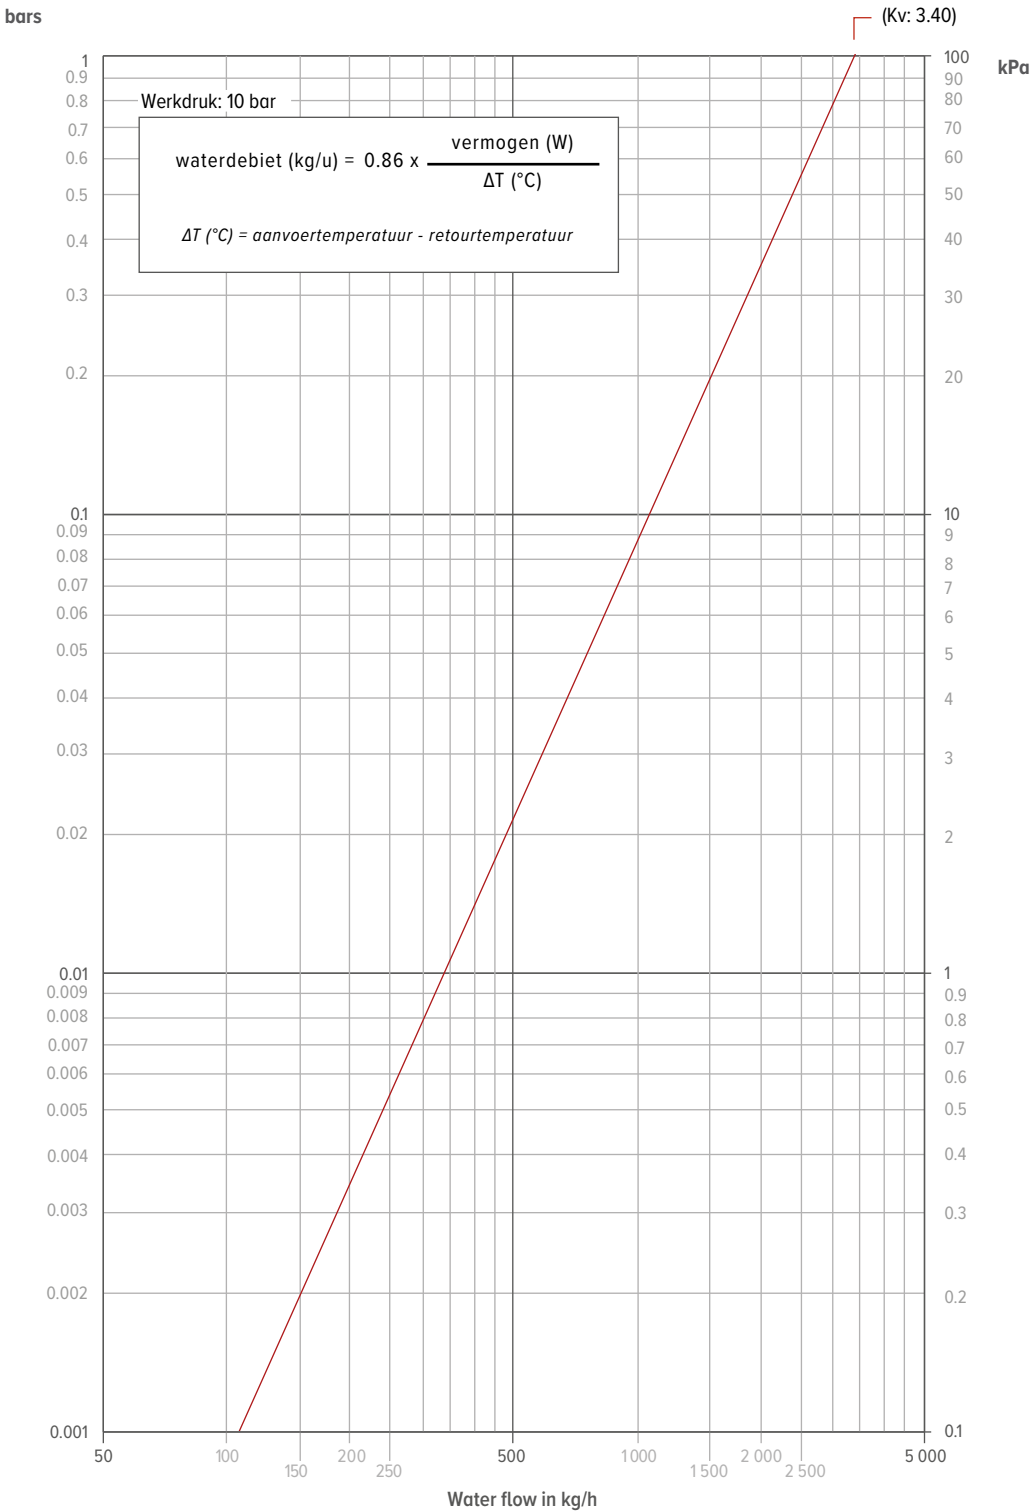

PRESSURE DROP

PRE-SETTING	1	2	3	4	5	6	7	8	9
NUMBER OF ROTATIONS	1.25	1.50	1.75	2.00	2.50	3.00	3.50	4.00	open
KV	0.14	0.20	0.31	0.43	0.60	0.79	1.00	1.20	1.35

JAGA RETURN VALVES 3/4”
EUROCONE ANGLED
5090 4111



Set: 225, 226, 285, 272, 285

JAGA RETURN VALVES 3/4”
EUROCONE STRAIGHT
5094 4431



Set: 222, 282, 271, 282

JAGA LOCKSHIELD VALVES 1/2” FEMALE
THREAD STRAIGHT
5090 109




Set: 98, 99, 297, 298, 299

JAGA LOCKSHIELD VALVES 1/2” FEMALE
THREAD ANGLED
5090 110



Set: 99, 299

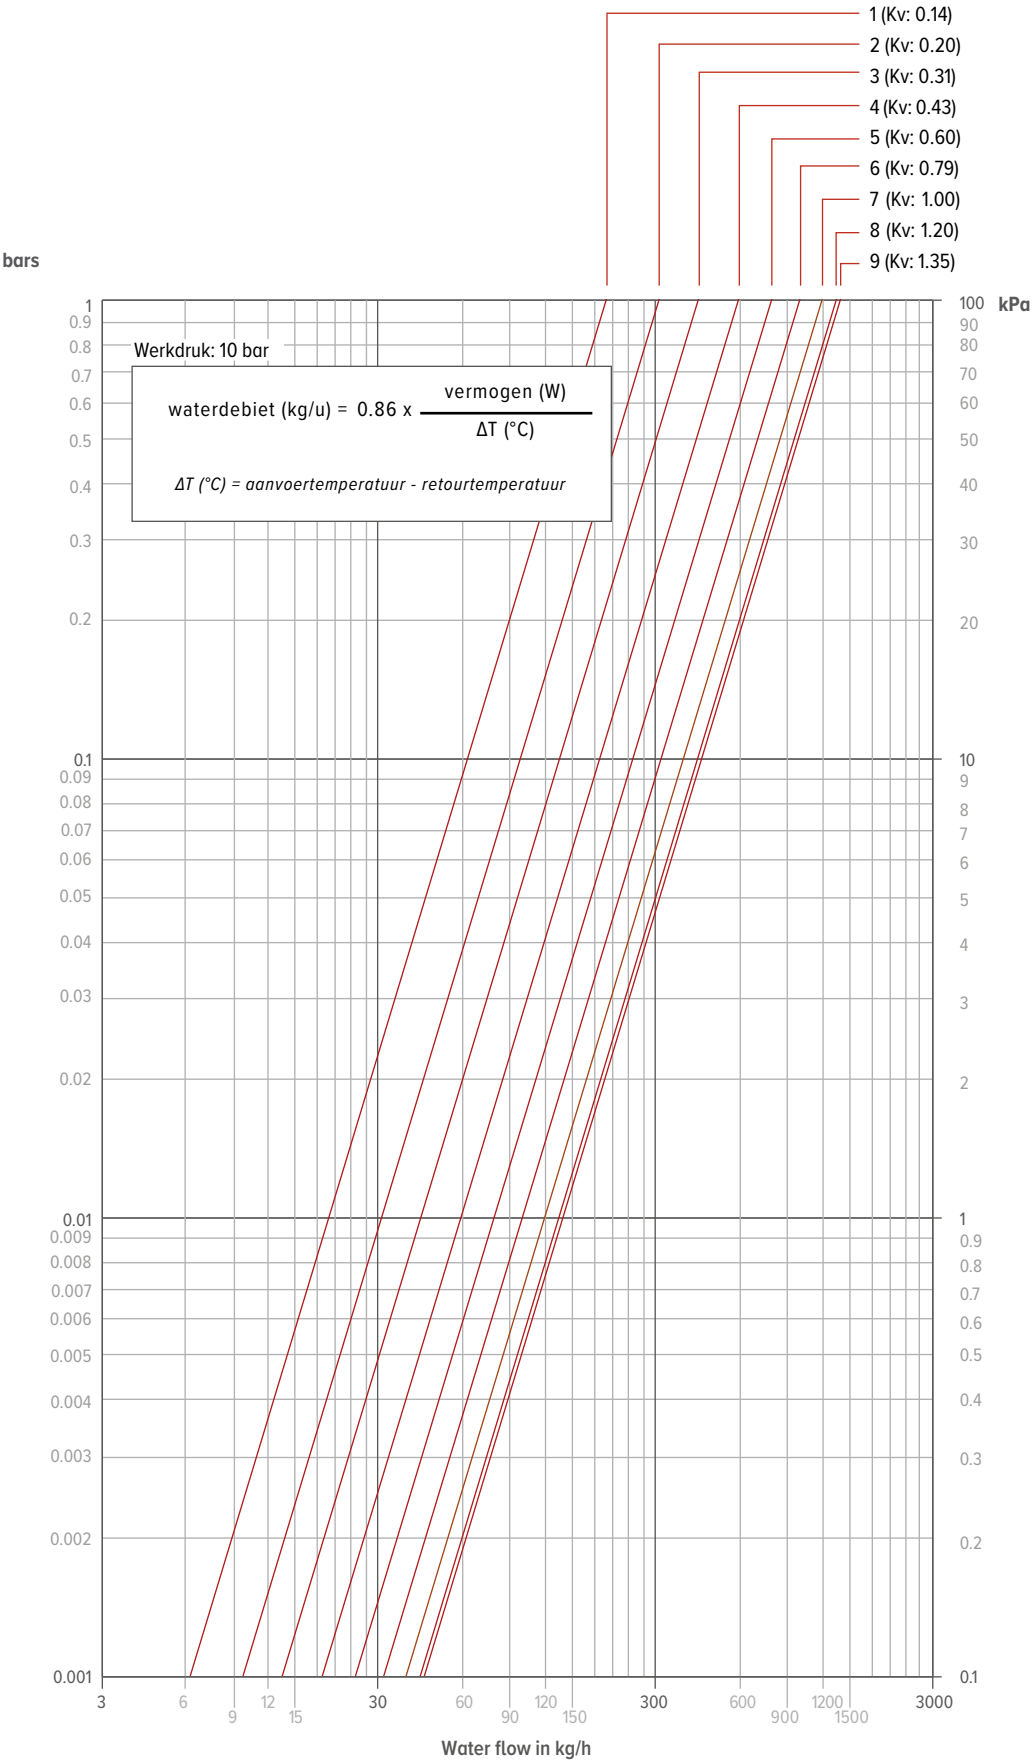

PRESSURE DROP

ONE PIPE

PRE-SETTING	0	1	2	3	4	5	6	7
RADIATOR FLOW %	0	11	21	26	29	31	32	32
KV	1.50	1.68	1.90	2.04	2.12	2.17	2.20	2.20


DECO PRO
THERMOSTATIC VALVE
ANGLED

- 5094.427 chrome
- 5094.432 matte aluminium look
- 5094.433 brushed stainless steel look



DECO PRO
THERMOSTATIC VALVE
STRAIGHT

- 5094.427 chrome
- 5094.432 matte aluminium look
- 5094.433 brushed stainless steel look

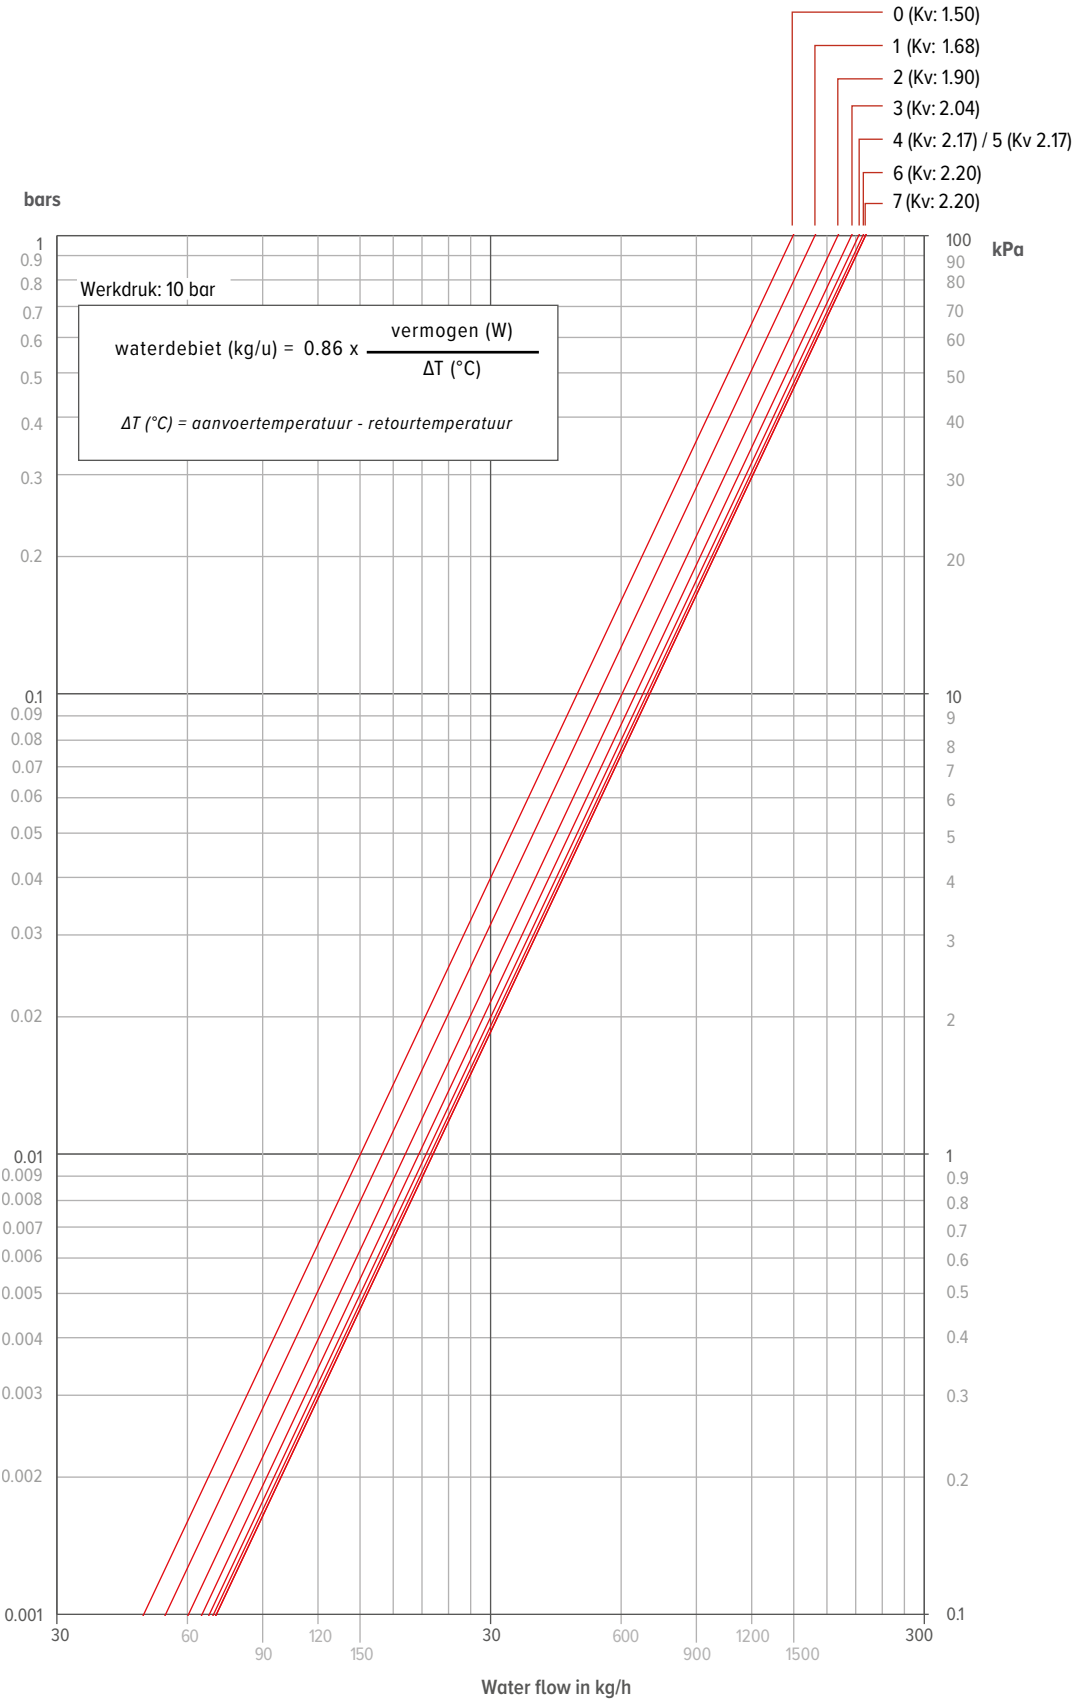

PRESSURE DROP

TWO PIPE

PRE-SETTING	0	1	2	3	4	5	6	7	max.
RADIATOR FLOW %	0	100	100	100	100	100	100	100	100
KV	0	0.29	0.72	1.10	1.29	1.46	1.56	1.61	1.65


DECO PRO
THERMOSTATIC VALVE
ANGLED

- 5094.427 chrome
- 5094.432 matte aluminium look
- 5094.433 brushed stainless steel look



DECO PRO
THERMOSTATIC VALVE
STRAIGHT

- 5094.427 chrome
- 5094.432 matte aluminium look
- 5094.433 brushed stainless steel look

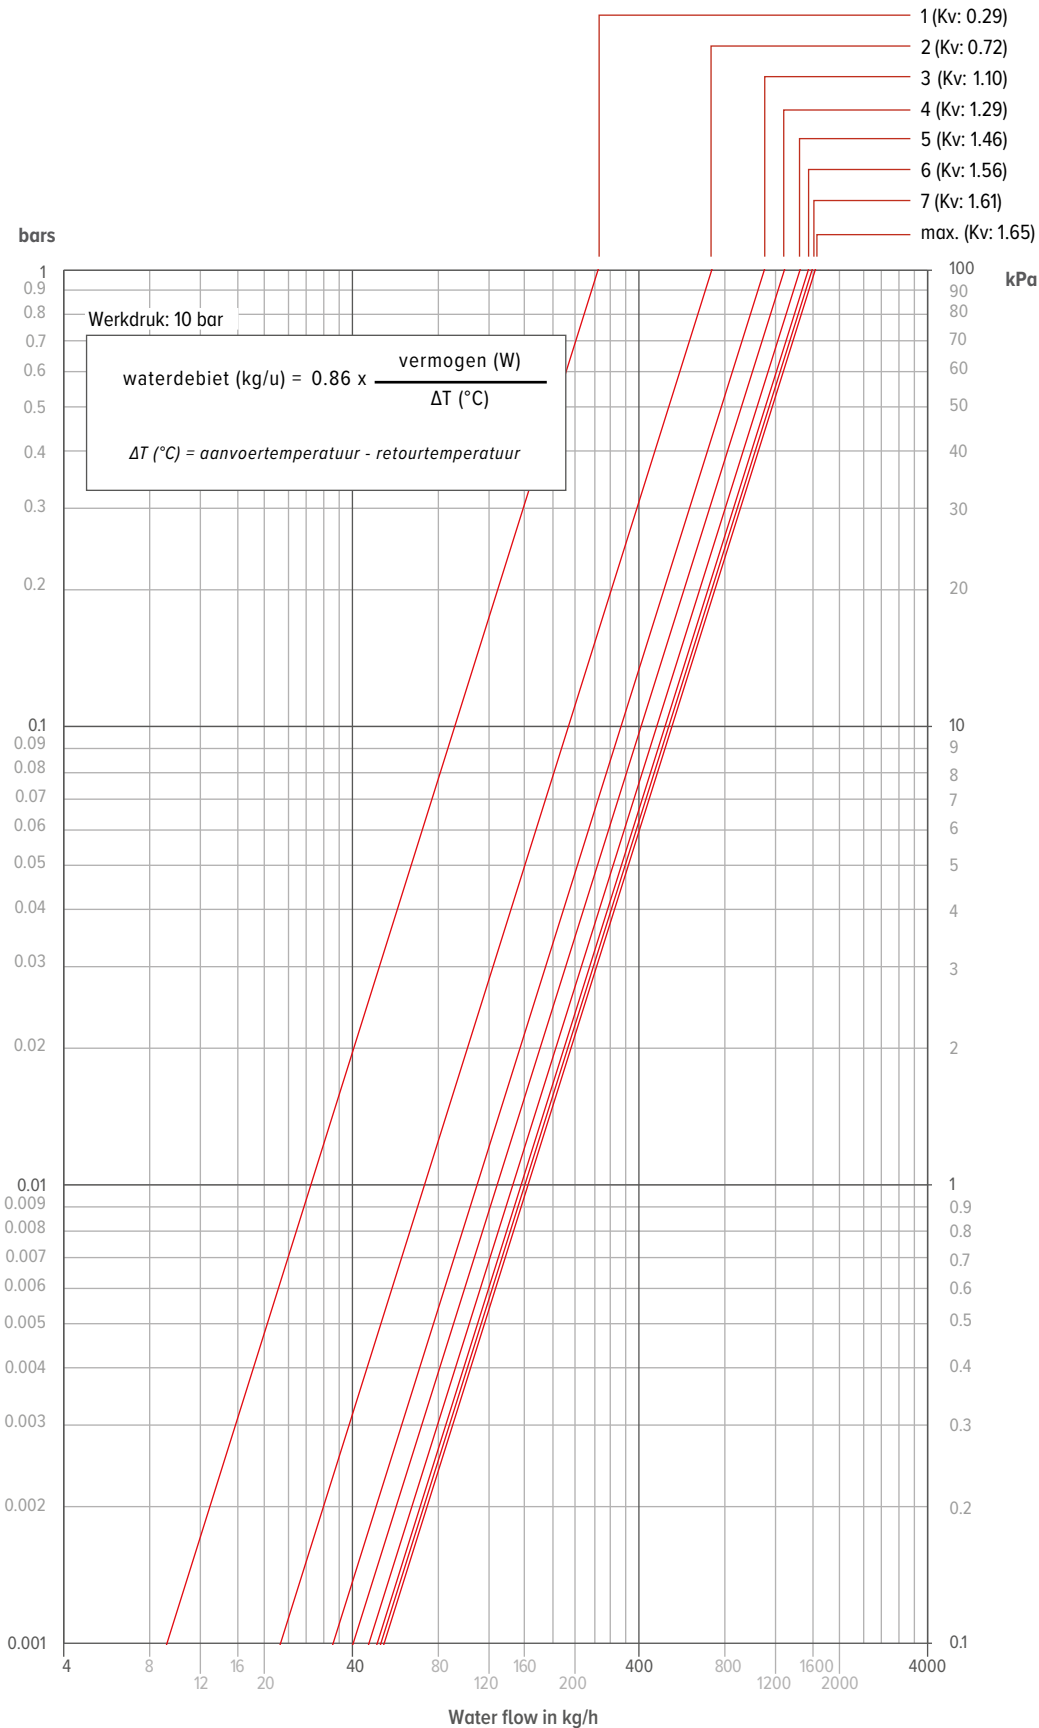



JAGA INTERNATIONAL JAGA NV

In need of some advice? Make an appointment at the Jaga Advice Centre.

Verbindingslaan 16
3590 Diepenbeek

+32 (0) 11 29 41 12

export@jaga.be
jaga.com