



KNOCKONWOOD FREESTANDING DBE



KNOCKONWOOD FREESTANDING DBE


CONTENT	3
TECHNICAL INFORMATION	5
Dimensions	5
Standard delivery	5
Wood finishes	5
Technical table	5
Correction factors	6
Guideline for limiting flow noise	6
Pressure drop	7



KNOCKONWOOD FREESTANDING



DIMENSIONS (in cm)

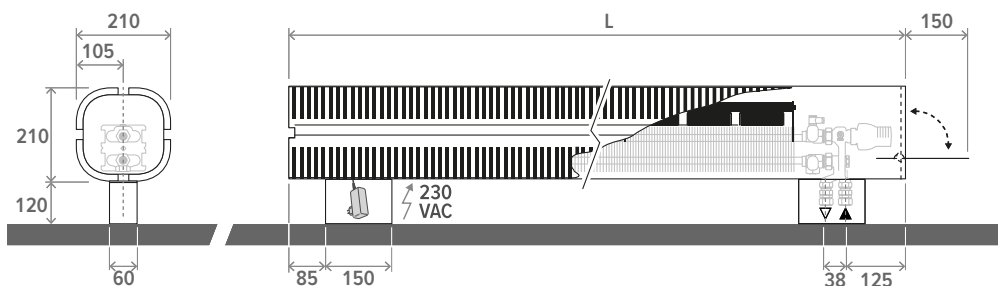

STANDARD DELIVERY

- one-piece, fully assembled radiator, easy-to-open side to regulate the temperature.
- curved plywood casing with a high-grade veneer, satin-matte finish
- pre-assembled DBE set with control, and 12 VDC power supply
- Low-H₂O heat exchanger type 15
- feet and side panels in sandblast grey 001, thermostatic head hidden behind the side panel.
- fixed feet: height 12 cm
- Jaga valve and thermostatic head, can be connected to the left or right in the foot.
- angled air vent 1/8" and drain plug 1/2"

WOOD FINISHES

The wooden casing is finished with a scratch-resistant polyurethane varnish, satin matte, gloss degree 40%. High UV resistance.

Available from stock in height 055 and lengths from 060 to 140.

	
700 Oak natural	740 Zebrano natural
Available on request	
	
760 Maple natural	720 Beech natural
	
701 Oak bleached	721 Beech bleached
	
710 Mahogany	702 Oak wenge-coloured
	
780 Walnut	

ORDER CODE

KNUF 021 **110** **15** XXX DBE XXX

— Sleeve coupling codes M24
— Type of wood
— Type
— Length

Sleeve coupling codes M24

PRECISION METAL TUBE		SYNTHETIC	
CODE	Tube Ø	CODE	Tube Ø
112	12/1	212	12/2
114	14/1	219	16/1.5
115	15/1	216	16/2
116	16/1	217	17/2
118	18/1	218	18/2

RPE/ALU		STEEL TUBE FOR C.H.	
CODE	Tube Ø	CODE	Tube Ø
314	14/2	501	M24 x 1/2"
316	16/2	503	M24 x 3/8"
326	16/2.2		
318	18/2		

KNOCKONWOOD FREESTANDING

TECHNICAL TABLE

HEIGHT H cm	LENGTH L cm	TYPE T	STABNDY (S) / COMFORT (C)	HEATING Room temperature 20°C				WEIGHT Kg	WATER CONTENT L	ORDER CODE
				35/30 Watts	45/40 Watts	55/45 Watts	75/65 Watts			
KNUF 021	110	15	S					18.0	1.08	KNUF 021 110 15 XXX DBE XXX
			C							
	130	15	S					21.0	1.28	KNUF 021 110 15 XXX DBE XXX
			C							
	170	15	S					24.0	1.67	KNUF 021 110 15 XXX DBE XXX
			C							
	210	15	S					27.0	2.06	KNUF 021 110 15 XXX DBE XXX
			C							

type of wood
sleeve coupling codes M24

The indicated outputs at ΔT 50 are exact values, measured in accordance with EN442. This table provides a calculated value using an average correction factor for all other ΔT outputs, valid for all dimensions.

Click www.jaga.com/selection-tools/ to download the calculation tools with the exact outputs. The online calculation tools are kept up to date with the most recent data. Minor output differences between printed tables and the different online calculation tools are therefore completely normal and within the margins of tolerance imposed by the standard.

AVERAGE CORRECTION FACTORS FOR HYBRID PRODUCTS - 75/65/20°C

room temperature: 20°C

Average N-value: 1.10

	TR	65	60	55	50	45	40	35	30	25
TA										
75		1.00	0.94	0.88	0.81	0.74	0.67	0.59	0.50	0.38
70		0.95	0.89	0.83	0.77	0.70	0.63	0.55	0.47	0.36
65			0.84	0.78	0.72	0.66	0.59	0.52	0.43	0.33
60				0.73	0.67	0.61	0.55	0.48	0.40	0.30
55					0.62	0.57	0.51	0.44	0.37	0.28
50						0.52	0.46	0.40	0.33	0.25
45							0.42	0.36	0.29	0.22
40								0.31	0.26	0.19
35									0.22	0.15
30										0.12


room temperature: 24°C

Average N-value: 1.10

	TR	65	60	55	50	45	40	35	30	25
TA										
75		0.91	0.85	0.79	0.72	0.65	0.58	0.49	0.39	0.22
70		0.86	0.80	0.74	0.68	0.61	0.54	0.46	0.36	0.20
65			0.75	0.69	0.63	0.57	0.50	0.42	0.33	0.19
60				0.64	0.59	0.53	0.46	0.39	0.30	0.17
55					0.54	0.48	0.42	0.35	0.27	0.15
50						0.44	0.38	0.32	0.24	0.13
45							0.33	0.28	0.21	0.11
40								0.23	0.17	0.09
35									0.14	0.07
30										0.04

GUIDELINE FOR LIMITING FLOW NOISE

TUBE	outer Ø	Wall thick- ness	Max. water speed (EN10255)	water content per metre	max. water flow	Maximum power at ΔT (° C) (T supply - T return)						
						ΔT 30	ΔT 20	ΔT 10	ΔT 5	ΔT 4	ΔT 3	ΔT 2
						Watts	Watts	Watts	Watts	Watts	Watts	Watts
	mm	mm	m/s	l	kg/h							
GALVANISED PIPE DIN 2440												
3/8 DN10 OD	17.2	2.35	0.40	0.12	173	6028	4019	2009	1005	804	603	402
1/2 DN15 OD	21.3	2.65	0.40	0.20	288	10046	6698	3349	1674	1340	1005	670
3/4 DN20 OD	26.9	2.65	0.42	0.37	559	19515	13010	6505	3253	2602	1952	1301
1 DN25 OD	33.7	3.25	0.49	0.58	1023	35690	23793	11897	5948	4759	3569	2379
1 1/4 DN32 OD	42.4	3.25	0.60	1.01	2182	76101	50734	25367	12684	10147	7610	5073
1 1/2 DN40 OD	48.3	3.25	0.66	1.37	3255	113549	75700	37850	18925	15140	11355	7570
2 DN50 OD	60.3	3.65	0.80	2.21	6365	222025	148017	74008	37004	29603	22203	14802
PRECISION METAL TUBE												
10/1	10	1.00	0.40	0.05	72	2512	1674	837	419	335	251	167
12/1	12	1.00	0.40	0.08	115	4019	2679	1340	670	536	402	268
14/1	14	1.00	0.40	0.11	158	5526	3684	1842	921	737	553	368
15/1	15	1.00	0.40	0.13	187	6530	4353	2177	1088	871	653	435
16/1	16	1.00	0.40	0.15	216	7535	5023	2512	1256	1005	753	502
18/1	18	1.00	0.40	0.20	288	10046	6698	3349	1674	1340	1005	670
22/1	22	1.00	0.40	0.31	446	15572	10381	5191	2595	2076	1557	1038
28/1	28	1.00	0.47	0.53	904	31522	21014	10507	5254	4203	3152	2101
RPE/ALU												
12/2	12	2.00	0.40	0.05	72	2512	1674	837	419	335	251	167
14/2	14	2.00	0.40	0.08	115	4019	2679	1340	670	536	402	268
16/1.5	16	1.50	0.40	0.13	187	6530	4353	2177	1088	871	653	435
16/2	16	2.00	0.40	0.11	158	5526	3684	1842	921	737	553	368
17/2	17	2.00	0.40	0.13	187	6530	4353	2177	1088	871	653	435
18/2	18	2.00	0.40	0.15	216	7535	5023	2512	1256	1005	753	502
20/2	20	2.00	0.40	0.20	288	10046	6698	3349	1674	1340	1005	670
26/3	26	3.00	0.40	0.31	446	15572	10381	5191	2595	2076	1557	1038
32/3	32	3.00	0.47	0.53	904	31522	21014	10507	5254	4203	3152	2101
40/3.5	40	3.50	0.56	0.86	1726	60220	40147	20073	10037	8029	6022	4015
50/4.25	50	4.25	0.66	1.35	3206	111824	74549	37275	18637	14910	11182	7455
63/5	63	5.00	0.80	2.21	6346	221359	147573	73786	36893	29515	22136	14757

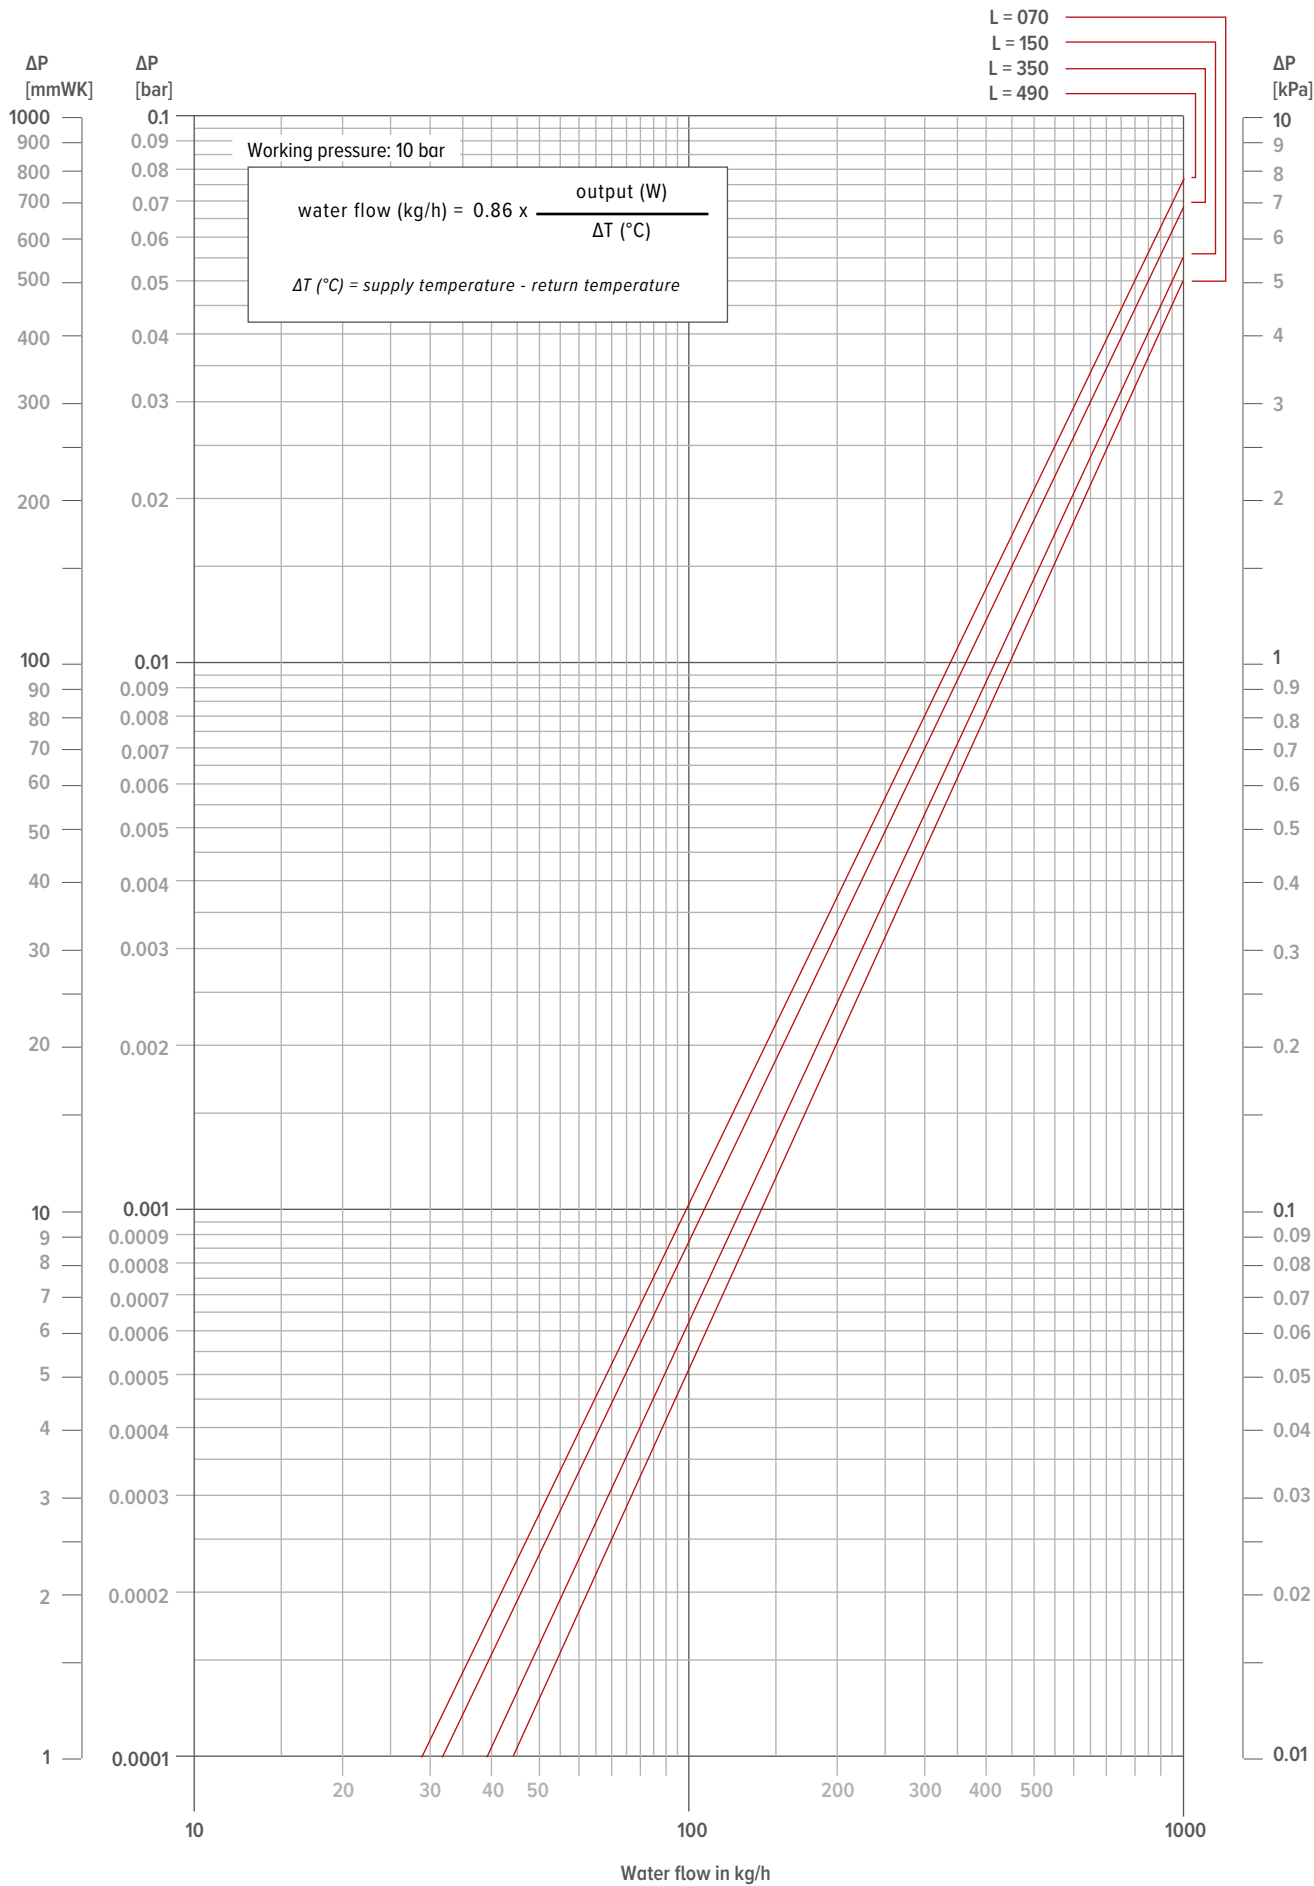



jaga CLIMATE
DESIGNERS

JAGA INTERNATIONAL JAGA NV

In need of some advice? Make an appointment at the Jaga Advice Centre.

Verbindingslaan 16
3590 Diepenbeek

+32 (0) 11 29 41 12

export@jaga.be
jaga.com