

# jaga

CLIMATE DESIGNERS

Heating 

PANEL PLUS VERTICAL € 2022.EX

# jaga

CLIMATE DESIGNERS

## PANEL PLUS

Elegant simplicity and power

Streamlined, elegant design. The Panel Plus can be fitted as a wall mounted radiator, but Jaga also offers a super compact, solid skirting model or horizontal version ! The simple design of the Panel Plus radiator with its hidden rear collectors provides an elegant simplicity that oozes quality.

Horizontal version: see p. 68.  
Freestanding version: see p. 156.

**PANEL PLUS VERTICAL** traffic white 333







PANEL PLUS 



## DIMENSIONS (in cm)

- standard connection
- variant

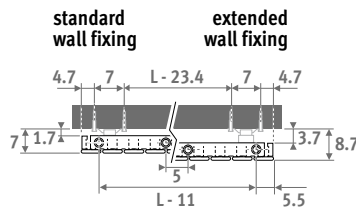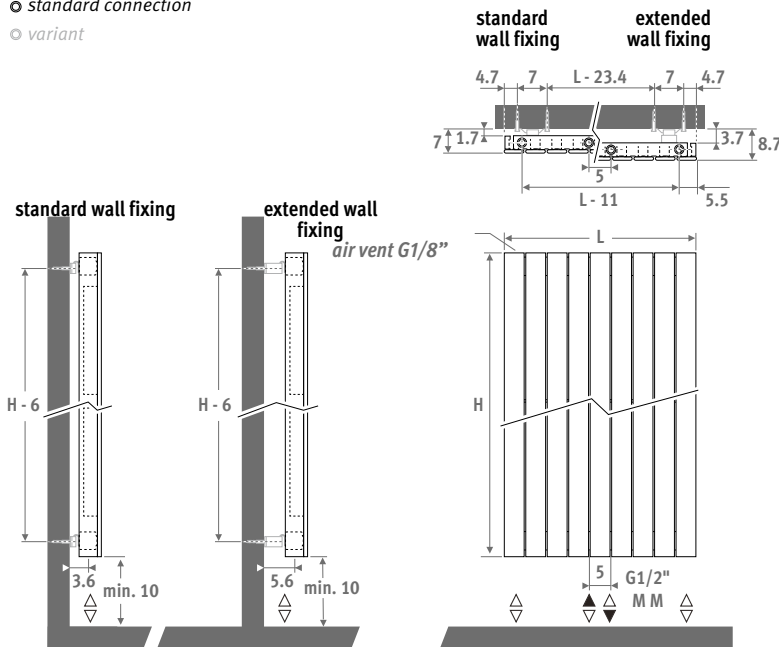

## DELIVERY

- universal central connection MM and 18/81 underneath
- standard and extended wall fixings included
- chrome-plated air vent and 3 drain plugs G1/2"

## COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (333), smooth satin matt
- sandblast grey (001), fine texture metallic
- off-black RAL 7021 (145) Soft touch: finely-textured matte look, gloss degree < 10%

Other colours: see colour chart.

## CONNECTION


Code:

1° number = flow

2° number = return

Standard connection:

Universal central connection at the bottom, code MM, flow left or right. Connection 18 or 81 at the bottom is also possible with code MM.






Top connection (no surcharge): enter code 45 or 54, provide an air vent on the central heating pipework.

## CONNECTION SETS

### Connection to the wall with Deco-Pro valve

TRV head and sleeve couplings included.



<b>set 48</b>	<b>BRUSHED STAINLESS STEEL</b>	€
	CODE.PW3.PS.1...	<b>280</b>
<b>set 41</b>	<b>CHROME</b>	€
	CODE.PW3.AW.1...	<b>118</b>
	CODE.PW3.AC.1...	<b>134</b>

fill in sleeve coupling code

Precision metal tube 15/1	<b>115</b>
Precision metal tube 16/1	<b>116</b>
Precision metal tube 18/1	<b>118</b>
RPE/ALU tube 16/2	<b>316</b>
RPE/ALU tube 18/2	<b>318</b>

### Other connections:

See chapter "Connection sets and valves Eyecatchers" for all connection options and technical information

code height length colour conn.  
**PPVW . 180 024 . XXX /MM**  
 fill in colour code —

	Watts 75/65	Watts 55/45	€ st. colour	€ other
<b>L H 180</b>				
<b>024</b>	584	294	<b>496</b>	<b>594</b>
<b>031</b>	730	368	<b>606</b>	<b>727</b>
<b>037</b>	875	441	<b>718</b>	<b>863</b>
<b>043</b>	1021	514	<b>832</b>	<b>998</b>
<b>050</b>	1167	588	<b>944</b>	<b>1132</b>
<b>056</b>	1313	662	<b>1056</b>	<b>1265</b>
<b>062</b>	1459	735	<b>1171</b>	<b>1405</b>
<b>069</b>	1605	809	<b>1244</b>	<b>1492</b>
<b>075</b>	1751	882	<b>1317</b>	<b>1580</b>
<b>081</b>	1897	956	<b>1390</b>	<b>1670</b>
<b>087</b>	2043	1030	<b>1466</b>	<b>1760</b>
<b>094</b>	2189	1103	<b>1538</b>	<b>1845</b>
<b>L H 200</b>				
<b>024</b>	644	326	<b>525</b>	<b>631</b>
<b>031</b>	805	408	<b>647</b>	<b>777</b>
<b>037</b>	965	489	<b>771</b>	<b>923</b>
<b>043</b>	1126	570	<b>893</b>	<b>1071</b>
<b>050</b>	1287	652	<b>1015</b>	<b>1217</b>
<b>056</b>	1448	733	<b>1137</b>	<b>1365</b>
<b>062</b>	1609	815	<b>1262</b>	<b>1514</b>
<b>069</b>	1770	897	<b>1340</b>	<b>1609</b>
<b>075</b>	1931	978	<b>1420</b>	<b>1704</b>
<b>081</b>	2092	1060	<b>1499</b>	<b>1800</b>
<b>087</b>	2253	1141	<b>1577</b>	<b>1893</b>
<b>094</b>	2414	1223	<b>1655</b>	<b>1987</b>
<b>L H 220</b>				
<b>024</b>	700	356	<b>558</b>	<b>668</b>
<b>031</b>	876	446	<b>687</b>	<b>824</b>
<b>037</b>	1051	535	<b>820</b>	<b>985</b>
<b>043</b>	1226	624	<b>951</b>	<b>1143</b>
<b>050</b>	1401	713	<b>1084</b>	<b>1300</b>
<b>056</b>	1576	802	<b>1217</b>	<b>1460</b>
<b>062</b>	1751	892	<b>1351</b>	<b>1621</b>
<b>069</b>	1926	981	<b>1439</b>	<b>1725</b>
<b>075</b>	2101	1070	<b>1521</b>	<b>1825</b>
<b>081</b>	2276	1159	<b>1608</b>	<b>1928</b>
<b>087</b>	2451	1248	<b>1691</b>	<b>2029</b>
<b>094</b>	2627	1338	<b>1776</b>	<b>2132</b>
<b>L H 240</b>				
<b>024</b>	754	386	<b>589</b>	<b>708</b>
<b>031</b>	943	482	<b>730</b>	<b>875</b>
<b>037</b>	1131	579	<b>872</b>	<b>1046</b>
<b>043</b>	1320	675	<b>1015</b>	<b>1217</b>
<b>050</b>	1508	771	<b>1155</b>	<b>1387</b>
<b>056</b>	1697	868	<b>1297</b>	<b>1557</b>
<b>062</b>	1885	964	<b>1443</b>	<b>1729</b>
<b>069</b>	2074	1061	<b>1533</b>	<b>1840</b>
<b>075</b>	2262	1157	<b>1621</b>	<b>1947</b>
<b>081</b>	2451	1254	<b>1713</b>	<b>2055</b>
<b>087</b>	2639	1350	<b>1803</b>	<b>2164</b>
<b>094</b>	2828	1447	<b>1892</b>	<b>2270</b>

EN442 output at 20°C room temperature

Horizontal version: see p. 68  
 Freestanding version: see p. 156





**jaga**  
CLIMATE  
DESIGNERS

Jaga International  
Verbindingslaan 16  
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12  
Fax: +32 (0)11 29 41 60  
export@jaga.com

The information in this price list is correct at the time of printing.  
Jaga reserves the right to change product specification at any time in line  
with our policy of continuous improvement and innovation.  
All prices in Euro, exclude VAT. Prices valid from August 1, 2022.  
Replaces all existing price lists.