



PANEL PLUS HORIZONTAL




PANEL PLUS HORIZONTAL

CONTENT	3
TECHNICAL INFORMATION	4
Dimensions	4
Most used connection sets	6
Technical table	7
Type 11	7
Type 22	8
Correction factors	9
Guideline for limiting flow noise	9
Pressure drop	10



PANEL PLUS HORIZONTAL

DIMENSIONS (in mm)

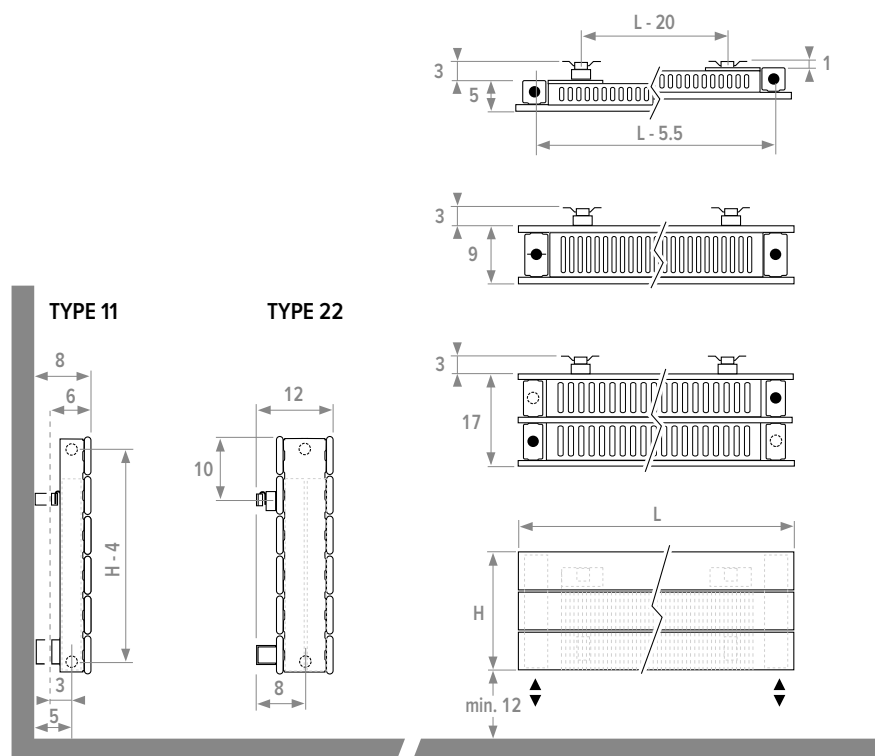

ORDER CODE

PPHW 012 080 11 XXX 18 GR

Colour

Type

Length

Height

STANDARD DELIVERY

- connection 18 underneath
- wall fixing
- chrome-plated air vent and drain plug G1/2"
- pre-mounted grille
- type 11 is provided with standard and extended wall fixings

COLOURS

Eco-friendly, scratch-resistant powder coating with high UV-resistance

Standard colours


- traffic white RAL 9016 (333) matte satin
- sandblast grey (001), fine texture metallic lak
- off-black (145), soft touch lightly-textured satin lacquer

Other colours

see Jaga colour chart. Surcharge: +20%

To the wall - DECO PRO VALVE

Complete chrome set



set 41	KVS: 1.65 / 2.20
TWO PIPE / ONE PIPE	
CODE PW3 AC 1...	AC
CODE PW3 AW 1...	AW
CODE PW3 AS 1...	AS
CODE PW3 AB 1...	AB
fill in sleeve coupling code	

Set in brushed stainless steel effect (SS)



set 48	KVS: 1.65 / 2.20
TWO PIPE / ONE PIPE	
CODE PW3 PS 1...	PS
fill in sleeve coupling code	

Set in brushed stainless steel effect (SS)



set 48	KVS: 1.65 / 2.20
TWO PIPE / ONE PIPE	
CODE PW3 PA 1...	PA
fill in sleeve coupling code	

To the floor - DECO PRO VALVE

Complete chrome set



set 41	KVS: 1.65 / 2.20
TWO PIPE / ONE PIPE	
CODE PF3 AC 1...	AC
CODE PF3 AW 1...	AW
CODE PF3 AS 1...	AS
CODE PF3 AB 1...	AB
fill in sleeve coupling code	

Set in brushed stainless steel effect (SS)



set 48	KVS: 1.65 / 2.20
TWO PIPE / ONE PIPE	
CODE PF3 PS 1...	PS
fill in sleeve coupling code	

Set in brushed stainless steel effect (SS)



set 48	KVS: 1.65 / 2.20
TWO PIPE / ONE PIPE	
CODE PF3 PA 1...	PA
fill in sleeve coupling code	

Sleeve coupling codes M24

PRECISION METAL TUBE		SYNTHETIC	
CODE	Tube Ø	CODE	Tube Ø
110	10/1	212	12/2
112	12/1	219	16/1.5
114	14/1	216	16/2
115	15/1	217	17/2
118	18/1	218	18/2
RPE/ALU		STEEL TUBE FOR C.H.	
CODE	Tube Ø	CODE	Tube Ø
314	14/2	501	M24 x 1/2"
316	16/2	503	M24 x 3/8"
326	16/2.2		
318	18/2		

For extensive information on valves, see the brochure "Connection sets & Valves"

PANEL PLUS HORIZONTAL

CORRECTION FACTORS

The indicated outputs at ΔT 50 are exact values, measured in accordance with EN442. This table provides a calculated value using an average correction factor for all other ΔT outputs, valid for all dimensions.

Click www.jaga.com/selection-tools/ to download the calculation tools with the exact outputs. The online calculation tools are kept up to date with the most recent data. Minor output differences between printed tables and the different online calculation tools are therefore completely normal and within the margins of tolerance imposed by the standard.


AVERAGE CORRECTION FACTORS FOR STATIC PRODUCTS ACCORDING TO EN442 - 75/65/20°C

room temperature: 20°C		Average N-value: 1.36								
	TR	65	60	55	50	45	40	35	30	25
TA										
75	1.00	0.93	0.85	0.77	0.69	0.61	0.52	0.42	0.31	
70		0.94	0.87	0.79	0.72	0.64	0.56	0.48	0.39	0.28
65			0.80	0.74	0.67	0.60	0.52	0.44	0.35	0.25
60				0.68	0.61	0.55	0.48	0.40	0.32	0.23
55					0.56	0.50	0.43	0.36	0.29	0.20
50						0.44	0.38	0.32	0.25	0.18
45							0.34	0.28	0.22	0.15
40								0.24	0.19	0.13
35									0.15	0.10
30										0.07

room temperature: 24°C		Average N-value: 1.36								
	TR	65	60	55	50	45	40	35	30	25
TA										
75		0.89	0.82	0.75	0.67	0.59	0.51	0.41	0.31	0.16
70		0.83	0.76	0.69	0.62	0.54	0.47	0.38	0.28	0.14
65			0.70	0.64	0.57	0.50	0.43	0.35	0.25	0.12
60				0.58	0.52	0.45	0.38	0.31	0.23	0.11
55					0.47	0.41	0.34	0.28	0.20	0.09
50						0.36	0.30	0.24	0.17	0.08
45							0.26	0.20	0.14	0.06
40								0.17	0.12	0.05
35									0.09	0.03
30										0.02

GUIDELINE FOR LIMITING FLOW NOISE

TUBE	outer Ø	Wall thick- ness	Max. water speed (EN10255)	water content per metre	max. water flow	Maximum power at ΔT (° C) (T supply - T return)						
						ΔT 30	ΔT 20	ΔT 10	ΔT 5	ΔT 4	ΔT 3	ΔT 2
						Watts	Watts	Watts	Watts	Watts	Watts	Watts
	mm	mm	m/s	l	kg/h							
GALVANISED PIPE DIN 2440												
3/8 DN10 OD	17.2	2.35	0.40	0.12	173	6028	4019	2009	1005	804	603	402
1/2 DN15 OD	21.3	2.65	0.40	0.20	288	10046	6698	3349	1674	1340	1005	670
3/4 DN20 OD	26.9	2.65	0.42	0.37	559	19515	13010	6505	3253	2602	1952	1301
1 DN25 OD	33.7	3.25	0.49	0.58	1023	35690	23793	11897	5948	4759	3569	2379
1 1/4 DN32 OD	42.4	3.25	0.60	1.01	2182	76101	50734	25367	12684	10147	7610	5073
1 1/2 DN40 OD	48.3	3.25	0.66	1.37	3255	113549	75700	37850	18925	15140	11355	7570
2 DN50 OD	60.3	3.65	0.80	2.21	6365	222025	148017	74008	37004	29603	22203	14802
PRECISION METAL TUBE												
10/1	10	1.00	0.40	0.05	72	2512	1674	837	419	335	251	167
12/1	12	1.00	0.40	0.08	115	4019	2679	1340	670	536	402	268
14/1	14	1.00	0.40	0.11	158	5526	3684	1842	921	737	553	368
15/1	15	1.00	0.40	0.13	187	6530	4353	2177	1088	871	653	435
16/1	16	1.00	0.40	0.15	216	7535	5023	2512	1256	1005	753	502
18/1	18	1.00	0.40	0.20	288	10046	6698	3349	1674	1340	1005	670
22/1	22	1.00	0.40	0.31	446	15572	10381	5191	2595	2076	1557	1038
28/1	28	1.00	0.47	0.53	904	31522	21014	10507	5254	4203	3152	2101
RPE/ALU												
12/2	12	2.00	0.40	0.05	72	2512	1674	837	419	335	251	167
14/2	14	2.00	0.40	0.08	115	4019	2679	1340	670	536	402	268
16/1.5	16	1.50	0.40	0.13	187	6530	4353	2177	1088	871	653	435
16/2	16	2.00	0.40	0.11	158	5526	3684	1842	921	737	553	368
17/2	17	2.00	0.40	0.13	187	6530	4353	2177	1088	871	653	435
18/2	18	2.00	0.40	0.15	216	7535	5023	2512	1256	1005	753	502
20/2	20	2.00	0.40	0.20	288	10046	6698	3349	1674	1340	1005	670
26/3	26	3.00	0.40	0.31	446	15572	10381	5191	2595	2076	1557	1038
32/3	32	3.00	0.47	0.53	904	31522	21014	10507	5254	4203	3152	2101
40/3.5	40	3.50	0.56	0.86	1726	60220	40147	20073	10037	8029	6022	4015
50/4.25	50	4.25	0.66	1.35	3206	111824	74549	37275	18637	14910	11182	7455
63/5	63	5.00	0.80	2.21	6346	221359	147573	73786	36893	29515	22136	14757

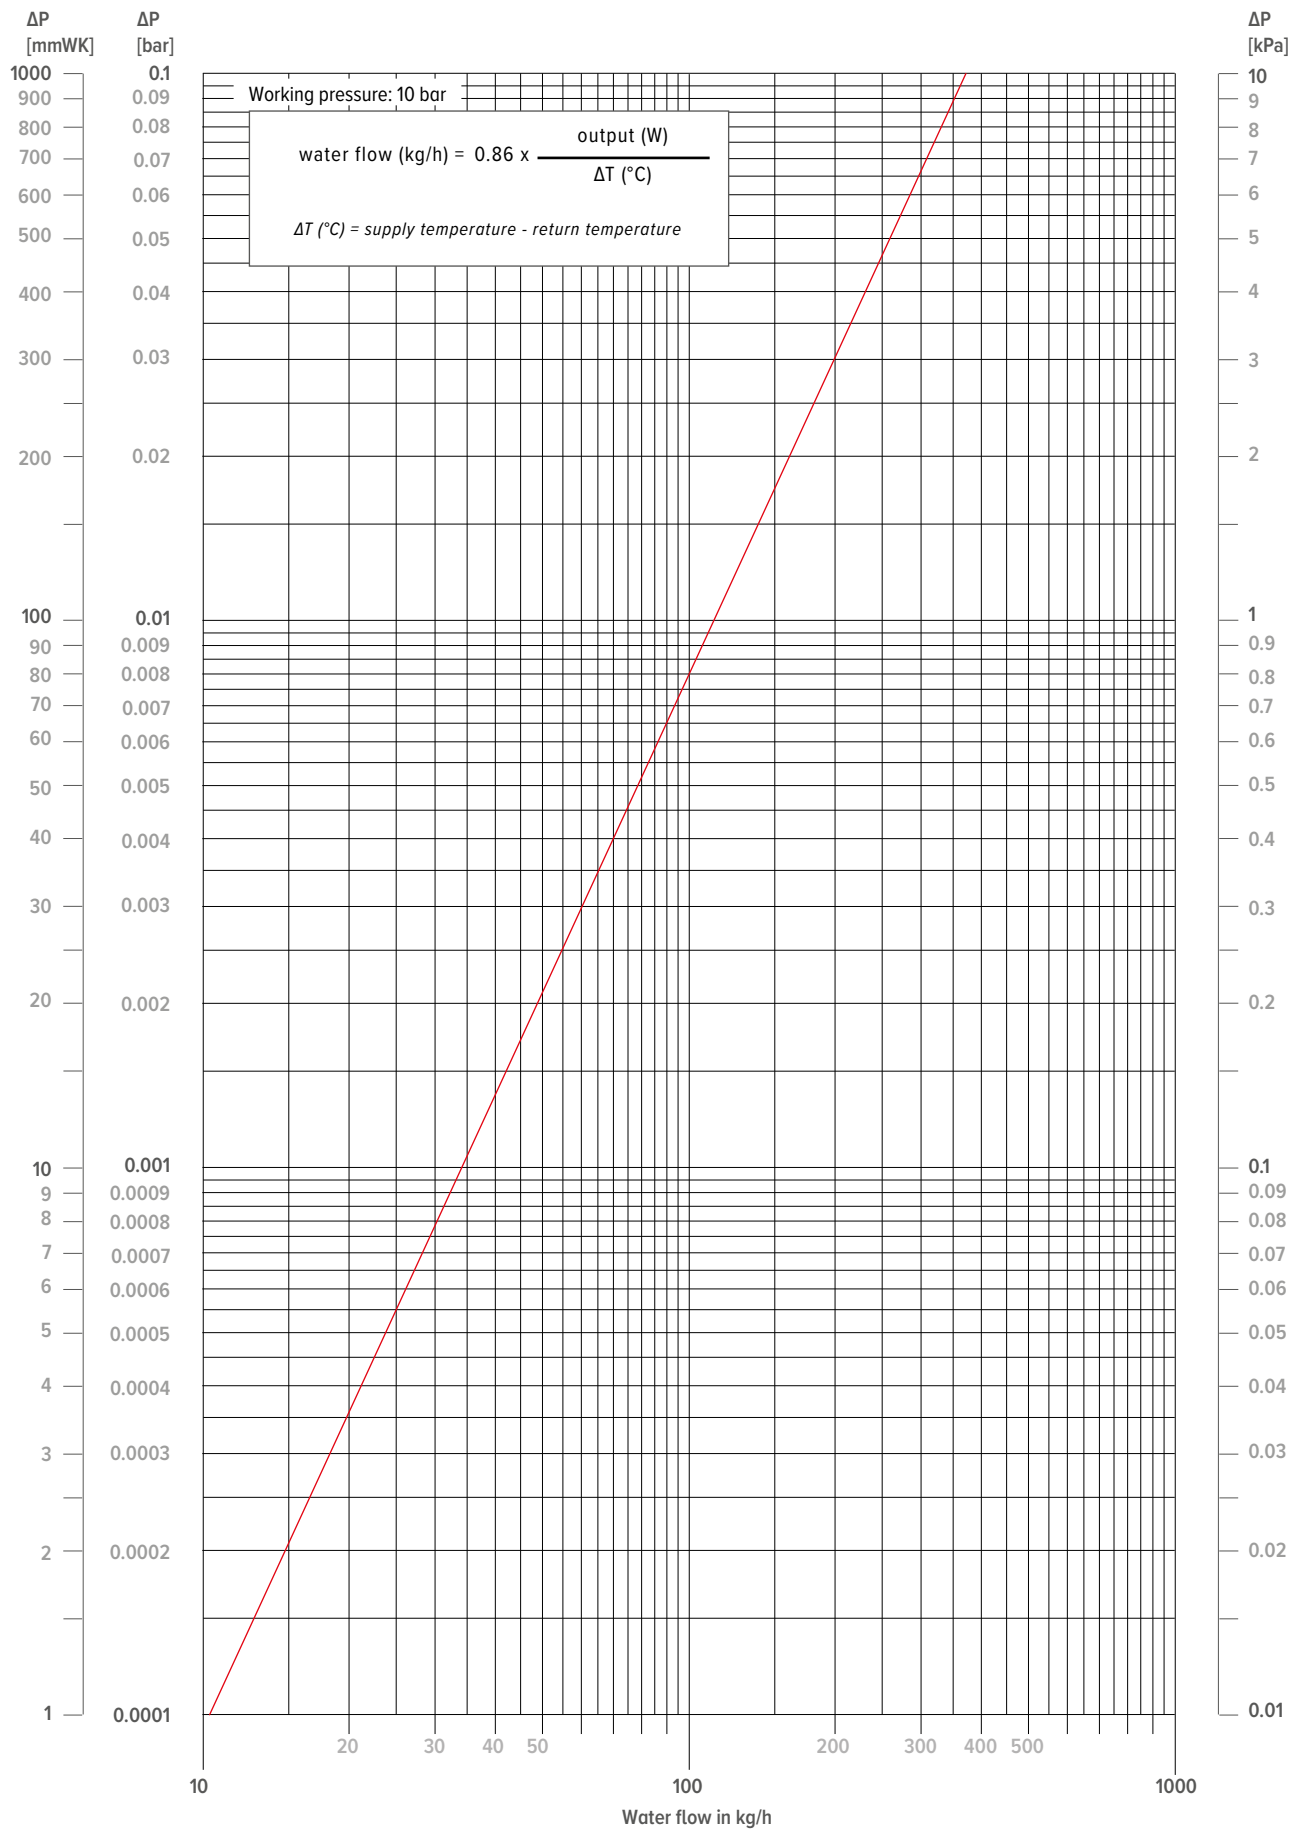



JAGA INTERNATIONAL JAGA NV

In need of some advice? Make an appointment at the Jaga Advice Centre.

Verbindingslaan 16
3590 Diepenbeek

+32 (0) 11 29 41 12

export@jaga.be
jaga.com