


STRADA - PRICE LIST - UK 03/2025

DIMENSIONS (in mm)

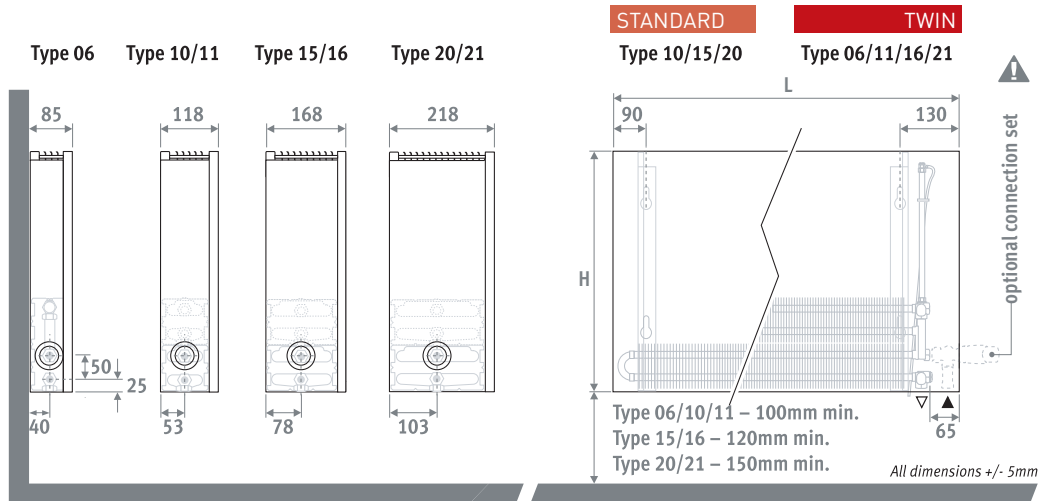

If ordering Hybrid radiators, please also see separate DBH price list

DELIVERY

All Stradas are made to order. Split deliveries option available. Please contact our customer service team to discuss your requirements.



Package includes:

- Low-H₂O heat exchanger with wall brackets and fixing kit, air vent 1/8" and drain plug 1/2".
- Casing for connection left or right at low level.
- Cover plate in stainless steel effect for the side panel at the opposite end from the valve.



COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- Traffic White RAL 9016 (133) soft touch
- Sandblast Grey (001) fine texture metallic
- Off-Black RAL 7021 (145) soft touch

Other colours available: see colour chart.

CONNECTION


Standard connection:

Bottom end left or right, to the wall or to the floor. Connection to the wall via the bottom of the casing, or totally concealed within the casing, depending on the valve or connection set chosen.

Optional high level valve:

Add to the code of the radiator /30 (left) or /60 (right)

E.g. STRW.035 050 06.xxx/60



For more details, see 'Valves, TRV Heads and Accessories' page.

Optional remote controlled valve:


Add to the code of the radiator /00
E.g. STRW.035 050 06.xxx/00

ORDERING CODE

code	height	length	type	colour
STRW .	020	050	10 .	XXX
enter colour code ↓				

TOWEL RAIL

in chrome-plated aluminium

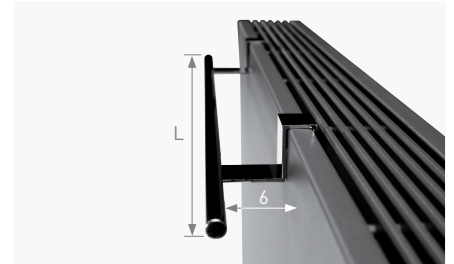

CODE	L	£
5501.001	560	257.30
5501.002	660	257.30



HEIGHT 200 - OUTPUTS & PRICES

STRW.020 LLL TT.XXX

L mm	SINGLE			WEIGHT	WATER CONTENT	PRICE	TWIN			WEIGHT	WATER CONTENT	PRICE
	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour
500	-	-	-	-	-	-	06	269	131	3.4	0.26	174.90
	10	328	159	3.8	0.33	162.00	11	-	-	-	-	-
	15	545	265	4.7	0.49	190.30	16	-	-	-	-	-
	20	766	373	5.7	0.66	220.40	21	-	-	-	-	-
600	-	-	-	-	-	-	06	323	157	4.0	0.31	186.20
	10	393	191	4.5	0.39	173.20	11	-	-	-	-	-
	15	654	319	5.6	0.59	205.90	16	-	-	-	-	-
	20	919	448	6.8	0.79	240.00	21	-	-	-	-	-
700	-	-	-	-	-	-	06	377	183	4.7	0.36	210.10
	10	459	223	5.3	0.46	194.10	11	-	-	-	-	-
	15	763	372	6.6	0.69	232.60	16	-	-	-	-	-
	20	1072	522	8.0	0.92	275.90	21	-	-	-	-	-
800	-	-	-	-	-	-	06	430	209	5.4	0.41	225.00
	10	524	255	6.0	0.52	207.60	11	-	-	-	-	-
	15	872	425	7.5	0.78	250.00	16	-	-	-	-	-
	20	1226	597	9.1	1.06	297.60	21	-	-	-	-	-
900	-	-	-	-	-	-	06	484	236	6.0	0.46	239.20
	10	590	287	6.8	0.59	222.30	11	-	-	-	-	-
	15	981	478	8.5	0.88	271.40	16	-	-	-	-	-
	20	1379	672	10.3	1.19	322.80	21	-	-	-	-	-
1000	-	-	-	-	-	-	06	538	262	6.7	0.51	256.80
	10	655	318	7.5	0.65	238.60	11	-	-	-	-	-
	15	1090	531	9.4	0.98	294.70	16	-	-	-	-	-
	20	1532	746	11.4	1.32	352.60	21	-	-	-	-	-
1100	-	-	-	-	-	-	06	592	288	7.4	0.56	270.00
	10	721	350	8.3	0.72	251.40	11	-	-	-	-	-
	15	1199	584	10.3	1.08	312.30	16	-	-	-	-	-
	20	1685	821	12.5	1.45	376.10	21	-	-	-	-	-
1200	-	-	-	-	-	-	06	646	314	8.0	0.61	285.90
	10	786	382	9.0	0.78	268.00	11	-	-	-	-	-
	15	1308	637	11.3	1.18	334.30	16	-	-	-	-	-
	20	1838	895	13.7	1.58	404.40	21	-	-	-	-	-
1400	-	-	-	-	-	-	06	753	366	9.4	0.71	312.40
	10	917	446	10.5	0.91	292.50	11	-	-	-	-	-
	15	1526	743	13.2	1.37	367.20	16	-	-	-	-	-
	20	2145	1045	16.0	1.85	469.90	21	-	-	-	-	-
1600	-	-	-	-	-	-	06	861	419	10.7	0.82	370.00
	10	1048	509	12.0	1.04	345.50	11	-	-	-	-	-
	15	1744	850	15.0	1.57	437.30	16	-	-	-	-	-
	20	2451	1194	18.2	2.11	561.40	21	-	-	-	-	-
1800	-	-	-	-	-	-	06	968	471	12.1	0.92	400.90
	10	1179	573	13.5	1.17	376.60	11	-	-	-	-	-
	15	1962	956	16.9	1.76	477.50	16	-	-	-	-	-
	20	2758	1343	20.5	2.38	609.70	21	-	-	-	-	-
2000	-	-	-	-	-	-	06	1076	524	13.4	1.02	434.70
	10	1310	637	15.0	1.30	407.10	11	-	-	-	-	-
	15	2180	1062	18.8	1.96	544.90	16	-	-	-	-	-
	20	3064	1493	22.8	2.64	663.90	21	-	-	-	-	-
2400	-	-	-	-	-	-	06	1291	628	16.1	1.22	546.40
	10	1572	764	18.0	1.56	512.60	11	-	-	-	-	-
	15	2616	1274	22.6	2.35	682.90	16	-	-	-	-	-
	20	3677	1791	27.4	3.17	834.40	21	-	-	-	-	-
2800	-	-	-	-	-	-	06	1506	733	18.8	1.43	613.30
	10	1834	891	21.0	1.82	575.80	11	-	-	-	-	-
	15	3052	1487	26.3	2.74	767.80	16	-	-	-	-	-
	20	4290	2090	31.9	3.70	941.90	21	-	-	-	-	-

EN442 output at 20°C room temperature

HEIGHT 350 - OUTPUTS & PRICES

STRW.035 LLL TT.XXX

L mm	SINGLE			WEIGHT	WATER CONTENT	PRICE	TWIN			WEIGHT	WATER CONTENT	PRICE
	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour
500	-	-	-	-	-	-	06	395	194	4.5	0.32	227.00
	10	449	220	4.9	0.33	176.70	11	598	287	5.6	0.67	265.40
	15	735	361	6.0	0.49	207.30	16	797	378	7.1	0.99	312.50
	20	1030	506	7.0	0.66	238.90	21	1057	498	8.4	1.33	335.30
600	-	-	-	-	-	-	06	474	233	5.4	0.38	242.40
	10	539	264	5.9	0.39	189.00	11	718	344	6.7	0.80	282.50
	15	882	434	7.1	0.59	224.10	16	956	454	8.5	1.19	336.50
	20	1236	608	8.4	0.79	259.70	21	1268	598	10.0	1.60	363.90
700	-	-	-	-	-	-	06	553	271	6.3	0.44	273.10
	10	629	308	6.9	0.46	210.50	11	837	401	7.8	0.93	316.40
	15	1029	506	8.3	0.69	251.50	16	1115	529	9.9	1.39	381.70
	20	1442	709	9.8	0.92	296.00	21	1480	698	11.7	1.86	417.20
800	-	-	-	-	-	-	06	632	310	7.2	0.50	292.60
	10	718	351	7.8	0.52	225.70	11	957	459	9.0	1.06	337.90
	15	1176	578	9.5	0.78	270.60	16	1274	605	11.4	1.58	409.30
	20	1648	810	11.2	1.06	319.30	21	1691	797	13.4	2.13	449.50
900	-	-	-	-	-	-	06	711	349	8.1	0.57	311.00
	10	808	395	8.8	0.59	241.70	11	1076	516	10.1	1.20	359.20
	15	1323	650	10.7	0.88	293.50	16	1434	681	12.8	1.78	440.60
	20	1854	911	12.6	1.19	346.00	21	1903	897	15.0	2.39	484.20
1000	-	-	-	-	-	-	06	790	388	9.0	0.63	333.80
	10	898	439	9.8	0.65	257.90	11	1196	573	11.2	1.33	385.70
	15	1470	723	11.9	0.98	316.50	16	1593	756	14.2	1.98	478.00
	20	2060	1013	14.0	1.32	375.90	21	2114	997	16.7	2.66	528.40
1100	-	-	-	-	-	-	06	869	427	9.9	0.69	351.40
	10	988	483	10.8	0.72	271.60	11	1316	631	12.3	1.46	405.30
	15	1617	795	13.1	1.08	335.10	16	1752	832	15.6	2.18	505.50
	20	2266	1114	15.4	1.45	400.40	21	2325	1096	18.4	2.93	562.20
1200	-	-	-	-	-	-	06	948	465	10.8	0.76	371.50
	10	1078	528	11.8	0.78	289.80	11	1435	688	13.4	1.60	429.80
	15	1764	867	14.3	1.18	359.00	16	1912	908	17.0	2.38	538.50
	20	2472	1215	16.8	1.58	429.80	21	2537	1196	20.0	3.19	600.40
1400	-	-	-	-	-	-	06	1106	543	12.6	0.88	410.40
	10	1257	615	13.7	0.91	318.30	11	1674	802	15.7	1.86	473.30
	15	2058	1012	16.7	1.37	396.30	16	2230	1059	19.9	2.77	597.30
	20	2884	1418	19.6	1.85	500.50	21	2960	1396	23.4	3.72	706.00
1600	-	-	-	-	-	-	06	1264	620	14.4	1.01	484.90
	10	1437	703	15.7	1.04	374.30	11	1914	917	17.9	2.13	555.10
	15	2352	1156	19.0	1.57	469.60	16	2549	1210	22.7	3.17	706.50
	20	3296	1620	22.4	2.11	595.10	21	3382	1594	26.7	4.26	837.30
1800	-	-	-	-	-	-	06	1422	698	16.2	1.13	524.00
	10	1616	791	17.6	1.17	407.30	11	2153	1032	20.2	2.39	600.90
	15	2646	1301	21.4	1.76	511.90	16	2867	1361	25.6	3.56	768.10
	20	3708	1823	25.2	2.38	645.50	21	3805	1794	30.1	4.79	907.00
2000	-	-	-	-	-	-	06	1580	776	18.0	1.26	566.50
	10	1796	879	19.6	1.30	440.10	11	2392	1146	22.4	2.66	646.20
	15	2940	1445	23.8	1.96	581.30	16	3186	1513	28.4	3.96	874.50
	20	4120	2025	28.0	2.64	701.60	21	4228	1993	33.4	5.32	983.20
2400	-	-	-	-	-	-	06	1896	931	21.6	1.51	710.00
	10	2155	1055	23.5	1.56	552.40	11	2870	1375	26.9	3.19	805.30
	15	3528	1734	28.6	2.35	727.20	16	3823	1815	34.1	4.75	1089.30
	20	4944	2431	33.6	3.17	880.40	21	5074	2392	40.1	6.38	1229.80
2800	-	-	-	-	-	-	06	2212	1086	25.2	1.76	795.90
	10	2514	1230	27.4	1.82	619.80	11	3349	1605	31.4	3.72	902.30
	15	4116	2024	33.3	2.74	816.10	16	4460	2118	39.8	5.54	1220.80
	20	5768	2836	39.2	3.70	991.80	21	5919	2791	46.8	7.45	1384.30

EN442 output at 20°C room temperature

HEIGHT 500 - OUTPUTS & PRICES

STRW.050 LLL TT.XXX

L mm	SINGLE			WEIGHT	WATER CONTENT	PRICE	TWIN			WEIGHT	WATER CONTENT	PRICE
	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour
500	-	-	-	-	-	-	6	474	235	5.6	0.32	236.80
	10	538	265	6.0	0.33	189.40	11	693	332	6.8	0.67	276.30
	15	867	430	7.2	0.49	220.80	16	949	449	8.4	0.99	325.20
	20	1213	602	8.4	0.66	255.00	21	1291	605	9.8	1.33	349.50
600	-	-	-	-	-	-	6	568	282	6.7	0.38	252.30
	10	646	318	7.2	0.39	202.20	11	832	399	8.1	0.80	294.80
	15	1040	516	8.6	0.59	238.40	16	1139	539	10.0	1.19	349.90
	20	1455	722	10.0	0.79	276.30	21	1549	725	11.7	1.60	378.70
700	-	-	-	-	-	-	6	663	329	7.8	0.44	284.30
	10	753	371	8.4	0.46	224.70	11	970	465	9.5	0.93	329.00
	15	1214	602	10.1	0.69	267.10	16	1329	629	11.7	1.39	396.20
	20	1698	842	11.7	0.92	314.20	21	1807	846	13.7	1.86	433.50
800	-	-	-	-	-	-	6	758	376	8.9	0.50	305.00
	10	861	424	9.6	0.52	241.00	11	1109	532	10.8	1.06	351.80
	15	1387	688	11.5	0.78	287.00	16	1518	719	13.4	1.58	425.20
	20	1940	962	13.4	1.06	338.60	21	2066	968	15.6	2.13	467.00
900	-	-	-	-	-	-	6	852	423	10.0	0.57	324.40
	10	968	477	10.8	0.59	257.90	11	1247	598	12.2	1.20	374.10
	15	1561	774	13.0	0.88	310.90	16	1708	809	15.0	1.78	456.90
	20	2183	1083	15.0	1.19	366.10	21	2324	1088	17.6	2.39	502.50
1000	-	-	-	-	-	-	6	947	470	11.1	0.63	347.70
	10	1076	530	12.0	0.65	275.20	11	1386	665	13.5	1.33	401.20
	15	1734	860	14.4	0.98	335.00	16	1898	898	16.7	1.98	495.40
	20	2425	1203	16.7	1.32	396.50	21	2582	1209	19.5	2.66	547.40
1100	-	-	-	-	-	-	6	1042	517	12.2	0.69	366.20
	10	1184	584	13.2	0.72	290.10	11	1525	732	14.9	1.46	422.20
	15	1907	946	15.8	1.08	354.20	16	2088	988	18.4	2.18	524.10
	20	2668	1323	18.4	1.45	422.20	21	2840	1330	21.5	2.93	581.90
1200	-	-	-	-	-	-	6	1136	564	13.3	0.76	387.50
	10	1291	636	14.4	0.78	308.60	11	1663	798	16.2	1.60	447.60
	15	2081	1032	17.3	1.18	378.90	16	2278	1078	20.0	2.38	557.90
	20	2910	1443	20.0	1.58	452.40	21	3098	1451	23.4	3.19	621.00
1400	-	-	-	-	-	-	6	1326	658	15.5	0.88	429.30
	10	1506	742	16.8	0.91	341.40	11	1940	931	18.9	1.86	494.70
	15	2428	1204	20.2	1.37	420.60	16	2657	1258	23.4	2.77	620.60
	20	3395	1684	23.4	1.85	528.00	21	3615	1693	27.3	3.72	731.10
1600	-	-	-	-	-	-	6	1515	752	17.8	1.01	506.80
	10	1722	849	19.2	1.04	400.90	11	2218	1064	21.6	2.13	579.20
	15	2774	1376	23.0	1.57	497.10	16	3037	1438	26.7	3.17	732.60
	20	3880	1924	26.7	2.11	626.20	21	4131	1935	31.2	4.26	866.00
1800	-	-	-	-	-	-	6	1705	846	20.0	1.13	548.50
	10	1937	955	21.6	1.17	435.60	11	2495	1197	24.3	2.39	627.20
	15	3121	1548	25.9	1.76	541.30	16	3416	1617	30.1	3.56	796.80
	20	4365	2165	30.1	2.38	678.70	21	4648	2177	35.1	4.79	937.50
2000	-	-	-	-	-	-	6	1894	940	22.2	1.26	593.30
	10	2152	1061	24.0	1.30	471.70	11	2772	1330	27.0	2.66	675.20
	15	3468	1720	28.8	1.96	613.30	16	3796	1797	33.4	3.96	905.20
	20	4850	2405	33.4	2.64	737.10	21	5164	2418	39.0	5.32	1016.00
2400	-	-	-	-	-	-	6	2273	1128	26.6	1.51	741.20
	10	2582	1273	28.8	1.56	589.10	11	3326	1596	32.4	3.19	839.50
	15	4162	2064	34.6	2.35	765.10	16	4555	2156	40.1	4.75	1125.90
	20	5820	2886	40.1	3.17	922.70	21	6197	2902	46.8	6.38	1268.60
2800	-	-	-	-	-	-	6	2652	1316	31.1	1.76	832.00
	10	3013	1485	33.6	1.82	661.60	11	3881	1862	37.8	3.72	941.00
	15	4855	2408	40.3	2.74	859.20	16	5314	2516	46.8	5.54	1262.30
	20	6790	3367	46.8	3.70	1038.70	21	7230	3386	54.6	7.45	1428.10

EN442 output at 20°C room temperature

HEIGHT 650 - OUTPUTS & PRICES

STRW.065 LLL TT.XXX

L mm	SINGLE			WEIGHT	WATER CONTENT	PRICE	TWIN			WEIGHT	WATER CONTENT	PRICE
	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour
500	-	-	-	-	-	-	06	533	267	6.7	0.32	247.90
	10	606	301	7.2	0.33	204.00	11	772	371	7.9	0.67	290.20
	15	961	481	8.5	0.49	237.10	16	1087	513	9.6	0.99	340.60
	20	1343	672	9.7	0.66	272.40	21	1515	705	11.1	1.33	366.20
600	-	-	-	-	-	-	06	640	321	8.0	0.38	265.40
	10	727	361	8.6	0.39	217.90	11	926	444	9.5	0.80	309.80
	15	1153	577	10.1	0.59	255.70	16	1304	615	11.5	1.19	366.30
	20	1611	806	11.6	0.79	295.60	21	1818	846	13.3	1.60	397.20
700	-	-	-	-	-	-	06	746	374	9.3	0.44	297.90
	10	848	421	10.0	0.46	241.60	11	1080	518	11.1	0.93	345.20
	15	1345	673	11.8	0.69	285.70	16	1521	718	13.4	1.39	413.60
	20	1880	941	13.6	0.92	333.70	21	2121	987	15.5	1.86	452.30
800	-	-	-	-	-	-	06	853	428	10.6	0.50	320.20
	10	969	481	11.4	0.52	259.20	11	1234	592	12.6	1.06	369.00
	15	1538	770	13.5	0.78	307.00	16	1738	820	15.4	1.58	443.90
	20	2148	1075	15.5	1.06	359.60	21	2424	1128	17.7	2.13	487.10
900	-	-	-	-	-	-	06	959	481	12.0	0.57	340.10
	10	1090	541	12.9	0.59	277.20	11	1389	667	14.2	1.20	392.60
	15	1730	866	15.2	0.88	331.50	16	1956	923	17.3	1.78	476.90
	20	2417	1210	17.5	1.19	388.50	21	2727	1269	19.9	2.39	524.10
1000	-	-	-	-	-	-	06	1066	535	13.3	0.63	364.20
	10	1211	601	14.3	0.65	294.60	11	1543	741	15.8	1.33	419.80
	15	1922	962	16.9	0.98	355.90	16	2173	1026	19.2	1.98	515.40
	20	2685	1344	19.4	1.32	418.80	21	3030	1410	22.1	2.66	568.90
1100	-	-	-	-	-	-	06	1173	589	14.6	0.69	383.40
	10	1332	661	15.7	0.72	310.30	11	1697	814	17.4	1.46	441.80
	15	2114	1058	18.6	1.08	376.30	16	2390	1128	21.1	2.18	545.20
	20	2954	1478	21.3	1.45	445.50	21	3333	1551	24.3	2.93	604.90
1200	-	-	-	-	-	-	06	1279	642	16.0	0.76	406.90
	10	1453	721	17.2	0.78	331.00	11	1852	889	19.0	1.60	468.80
	15	2306	1154	20.3	1.18	402.70	16	2608	1231	23.0	2.38	581.10
	20	3222	1613	23.3	1.58	477.80	21	3636	1692	26.5	3.19	646.10
1400	-	-	-	-	-	-	06	1492	749	18.6	0.88	451.10
	10	1695	841	20.0	0.91	367.20	11	2160	1037	22.1	1.86	519.20
	15	2691	1347	23.7	1.37	448.20	16	3042	1436	26.9	2.77	647.10
	20	3759	1881	27.2	1.85	557.80	21	4242	1975	30.9	3.72	760.10
1600	-	-	-	-	-	-	06	1706	856	21.3	1.01	532.40
	10	1938	962	22.9	1.04	430.30	11	2469	1185	25.3	2.13	607.40
	15	3075	1539	27.0	1.57	528.40	16	3477	1641	30.7	3.17	762.60
	20	4296	2150	31.0	2.11	659.50	21	4848	2257	35.4	4.26	898.10
1800	-	-	-	-	-	-	06	1919	963	23.9	1.13	575.90
	10	2180	1082	25.7	1.17	467.50	11	2777	1333	28.4	2.39	657.90
	15	3460	1732	30.4	1.76	575.40	16	3911	1846	34.6	3.56	829.00
	20	4833	2419	34.9	2.38	714.20	21	5454	2539	39.8	4.79	972.30
2000	-	-	-	-	-	-	06	2132	1070	26.6	1.26	623.30
	10	2422	1202	28.6	1.30	505.10	11	3086	1481	31.6	2.66	708.00
	15	3844	1924	33.8	1.96	649.90	16	4346	2051	38.4	3.96	940.20
	20	5370	2688	38.8	2.64	775.20	21	6060	2821	44.2	5.32	1053.10
2400	-	-	-	-	-	-	06	2558	1284	31.9	1.51	777.40
	10	2906	1443	34.3	1.56	629.90	11	3703	1777	37.9	3.19	878.90
	15	4613	2309	40.6	2.35	809.00	16	5215	2461	46.1	4.75	1167.50
	20	6444	3225	46.6	3.17	968.40	21	7272	3385	53.0	6.38	1313.40
2800	-	-	-	-	-	-	06	2985	1498	37.2	1.76	872.30
	10	3391	1683	40.0	1.82	706.60	11	4320	2073	44.2	3.72	984.60
	15	5382	2694	47.3	2.74	907.00	16	6084	2871	53.8	5.54	1308.10
	20	7518	3763	54.3	3.70	1088.60	21	8484	3949	61.9	7.45	1476.40

EN442 output at 20°C room temperature

HEIGHT 950 - OUTPUTS & PRICES

STRW.095 LLL TT.XXX

L mm	SINGLE			WEIGHT	WATER CONTENT	PRICE	TWIN			WEIGHT	WATER CONTENT	PRICE
	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour	Type	Watts 75/65	Watts 55/45	kg	l	£ st. colour
500	-	-	-	-	-	-	6	-	-	-	-	-
	10	-	-	-	-	-	11	-	-	-	-	-
	15	-	-	-	-	-	16	-	-	-	-	-
	20	-	-	-	-	-	21	-	-	-	-	-
600	-	-	-	-	-	-	6	736	378	10.5	0.38	285.70
	10	836	421	11.3	0.39	242.70	11	1078	518	12.2	0.80	331.50
	15	1288	656	13.1	0.59	284.40	16	1606	753	14.5	1.19	391.20
	20	1795	915	14.9	0.79	324.40	21	2352	1081	16.5	1.60	422.20
700	-	-	-	-	-	-	6	858	440	12.3	0.44	319.20
	10	975	491	13.2	0.46	267.30	11	1257	604	14.3	0.93	368.30
	15	1502	765	15.3	0.69	315.00	16	1874	879	16.9	1.39	439.30
	20	2094	1067	17.4	0.92	364.00	21	2744	1261	19.3	1.86	478.70
800	-	-	-	-	-	-	6	981	503	14.0	0.50	344.50
	10	1114	561	15.1	0.52	287.80	11	1437	691	16.3	1.06	394.90
	15	1717	875	17.4	0.78	339.00	16	2142	1005	19.3	1.58	472.50
	20	2394	1220	19.8	1.06	392.60	21	3136	1441	22.0	2.13	516.60
900	-	-	-	-	-	-	6	1103	566	15.8	0.57	366.20
	10	1254	631	17.0	0.59	307.60	11	1616	777	18.4	1.20	420.30
	15	1931	984	19.6	0.88	365.70	16	2409	1130	21.7	1.78	507.60
	20	2693	1372	22.3	1.19	422.70	21	3528	1621	24.8	2.39	554.90
1000	-	-	-	-	-	-	6	1226	629	17.5	0.63	395.10
	10	1393	701	18.9	0.65	329.40	11	1796	863	20.4	1.33	452.10
	15	2146	1093	21.8	0.98	394.60	16	2677	1256	24.1	1.98	550.70
	20	2992	1524	24.8	1.32	458.50	21	3920	1801	27.5	2.66	604.90
1100	-	-	-	-	-	-	6	1349	692	19.3	0.69	417.40
	10	1532	771	20.8	0.72	348.30	11	1976	950	22.4	1.46	477.00
	15	2361	1203	24.0	1.08	418.40	16	2945	1381	26.5	2.18	583.60
	20	3291	1677	27.3	1.45	488.10	21	4312	1982	30.3	2.93	643.70
1200	-	-	-	-	-	-	6	1471	754	21.0	0.76	441.90
	10	1672	842	22.7	0.78	370.90	11	2155	1036	24.5	1.60	506.20
	15	2575	1312	26.2	1.18	446.20	16	3212	1507	28.9	2.38	620.70
	20	3590	1829	29.8	1.58	521.40	21	4704	2162	33.0	3.19	686.50
1400	-	-	-	-	-	-	6	1716	880	24.5	0.88	492.90
	10	1950	982	26.5	0.91	415.30	11	2514	1208	28.6	1.86	563.00
	15	3004	1531	30.5	1.37	501.20	16	3748	1758	33.7	2.77	694.40
	20	4189	2134	34.7	1.85	611.30	21	5488	2522	38.5	3.72	808.00

EN442 output at 20°C room temperature

VALVES, TRV HEADS AND ACCESSORIES

OUR SPECIALLY SHORTENED VALVES CAN BE CONCEALED WITHIN THE STANDARD CASING. OTHER VALVES MAY BE PARTIALLY VISIBLE.

SLEEVE COUPLING M24

Copper Tube

CODE	Tube Ø
5094.110	10/1
5094.115	15/1

Steel Tube for C.H

CODE	Tube Ø
5094.501	1/2"

Please note other couplings are available on request.

SLEEVE COUPLING 1/2"

Copper Tube

CODE	Tube Ø
5098.110	10/1
5098.115	15/1

Steel Tube for C.H

CODE	Tube Ø
5094.502	1/2"

Please note other couplings are available on request.


JAGA PRO THERMOSTATIC VALVE



- with pre-setting
- for two pipe
- for connection to the floor
- complies to European standard EN 215.1

CODE	Description	Price £
5094.4414	Jaga Pro Thermostatic Valve (M24)	71.80
5090.1125	TRV Head (White)	44.70


JAGA THERMOSTATIC VALVE – WALL

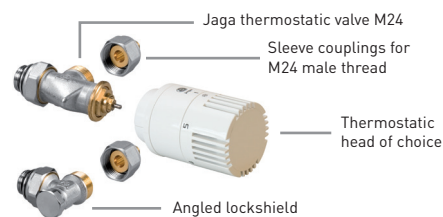

Consists of the following :


- 5090.407 Type 06 Angled TRV
- 5090.111 Type 06 Angled Lockshield Valve
- 5090.1125 White TRV Head
- Adaptors to suit 15mm copper pipe as standard

To suit pipework to wall (Same end 20/70 connections).



CODE	Description	Price £
5090.407	Jaga Type 06 TRV (M24)	31.10
5090.111	Angled Type 06 Lockshield Valve (M24)	17.60
5090.1125	TRV Head (White)	44.70


JAGA THERMOSTATIC VALVE – FLOOR

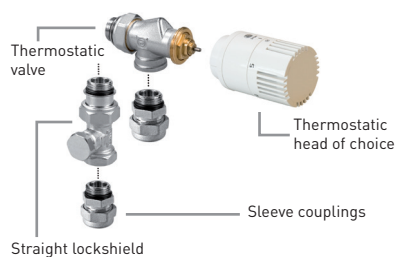

Consists of the following :

- 5090.405 Angled TRV
- 5090.109 Straight Lockshield Valve
- 5090.1125 White TRV Head
- Adaptors to suit 15mm copper pipe as standard

To suit pipework from the floor (Same end 20/70 connections).



CODE	Description	Price £
5090.405	Jaga Angled TRV (1/2")	31.10
5090.109	Straight Lockshield Valve (1/2")	18.10
5090.1125	TRV Head (White)	44.70

ARTHRITIC AID



CODE
5090.ARTH


HIGH LEVEL JAGA TOP VALVE



Consists of the following :

- 5090.13001 High Level TRV Set (including valve, capillary & head)
- 5090.109 Straight Lockshield Valve OR 5090.110 Angled Lockshield Valve
- 5090.1125 White TRV Head
- Adaptors to suit 15mm copper pipe as standard

To suit pipework from the floor or wall (Same end 30/60 connections).



CODE	Description	Price £
5090.13001	Jaga High Level TRV Set (1/2")	159.30
5090.110	Angled Lockshield Valve (1/2") (Wall)	17.60
5090.109	Straight Lockshield Valve (1/2") (Floor)	18.10

TRV HEADS



CODE
5090.1125



CODE
5090.1150



CODE
5090.1151



CODE
5090.1152







CODE
5090.1161

CODE	Description	Price £
5090.1125	White (Heating)	44.70
5090.1150	White (Heating)	57.40
5090.1151	Chrome (Heating)	89.80
5090.1152	Silver (Heating)	63.90
5090.1161	Heimeier Thermostatic Head HC (Heating + Cooling)	91.50

EN442 output at 20°C room temperature



 +44 1531 631 533
 jaga@jaga.co.uk
 www.jaga.co.uk

 **JAGA UK**
Kriekels House,
Lower Road Trading Estate, Ledbury,
Herefordshire HR8 2DJ

Notes relative to price list

1. May be subject to alteration without prior notification
2. List prices subject to trading terms
3. Does not include delivery
4. Subject to VAT at the prevailing rate