

jaga

CLIMATE DESIGNERS

Heating 

LINEA PLUS FREESTANDING kr. 2024.DK



jaga

CLIMATE DESIGNERS

LINEA PLUS FREESTANDING

Warm power, slim line

- For spaces with large windows, glazed façades, for window displays, conservatories, under window seats and for dwarf walls.
- Discreet slim-line design with flat front panel and stylish aluminium grille.
- No wasteful heat loss from radiation through glazing.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Suitable for integrated valve.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as a wall mounted model. See page 38.

LINEA PLUS white 133 (RAL 9016)






LINEA PLUS FREESTANDING

LINEA PLUS FREESTANDING




DIMENSIONS (in cm)

HEIGHT 020

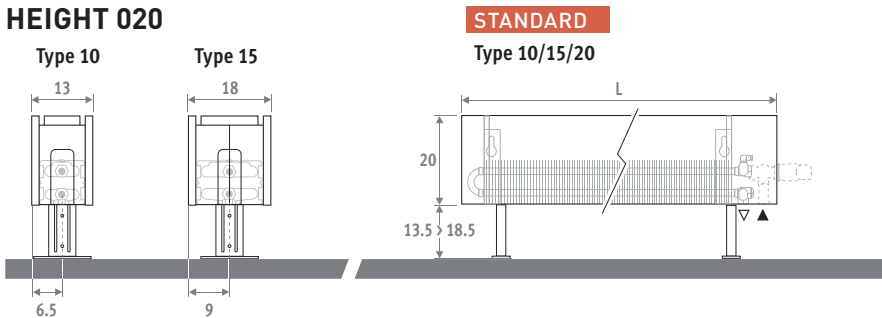

HEIGHT 035

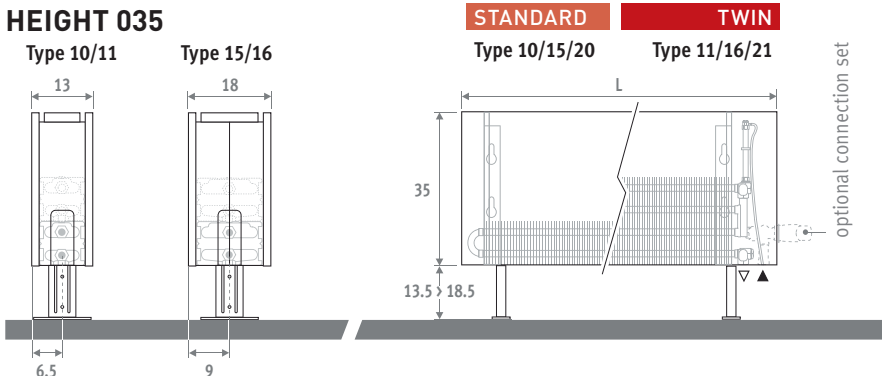

Also available as a wall mounted model. See page 38.

DELIVERY

Easy to install by one person. Delivered in a cardboard box, which can also be used as protection on site after installation.

Standard delivery:

- Low-H₂O heat exchanger with air vent elbow (standard) or extended air vent (twin) 1/8" and drain plug 1/2"
- connection left or right below
- standard adjustable feet in neutral grey

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.


Standard colours:

- traffic white RAL 9016 (333), smooth satin matt
- sandblast grey (001), fine texture metallic
- off-black RAL 7021 (145) Soft touch: finely-textured matte look, gloss degree < 10%

Other colours: see colour chart.

CONNECTION

Standard connection: bottom end left or right

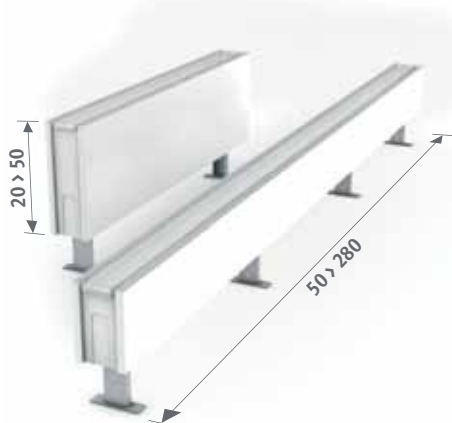

OPTIONS

Feet in the same colour as the casing

For feet in the same colour as the casing, repeat the colour code after the code of the radiator.

ex.: LINF. HHH LLL TT.XXX/XXX

Surcharge		Kr.
Length casing		
050 > 110	2 feet	165
120 > 220	3 feet	255
240 > 300	4 feet	345

Extended adjustable feet

- For installation on a rough subfloor or computer floor.


- For extended feet in neutral grey, add /AL to the ordering code.

ex.: LINF. 020 050 10.XXX/AL

- For extended feet in the same colour as the casing, add /AL to the ordering code and repeat the colour code.

ex.: LINF. 020 050 10.XXX/AL/XXX

Surcharge		Kr.	Kr.
Length casing		grey	colour
050 > 110	2 feet	75	270
120 > 220	3 feet	135	428
240 > 380	4 feet	165	578

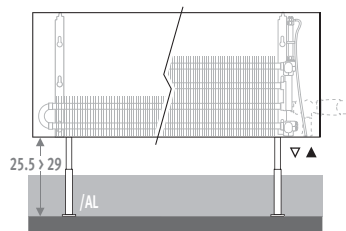


ORDERING CODE

code	height	length	type	colour
LINF .	020	050	10 .	XXX
fill in colour code				

CONNECTION SETS

Jaga H-valve to the floor for one or two pipe

TRV head and sleeve couplings Eurocone 3/4" included.

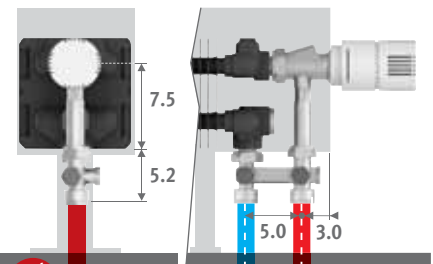

set 104	CODE 1-PIPE/2-PIPE	Kr.
	COLO.HBSF.AW.4...	758
	COLO.HBSF.JW.4...	825

fill in sleeve coupling code

Precision metal tube 15/1	115
Precision metal tube 16/1	116
RPE/ALU tube 16/2	616
RPE/ALU tube 20/2	620

Other connections:

see chapter "Connection sets and valves Low-H₂O" for all connection options and technical information.

LINEA PLUS FREESTANDING

LINF.HHH LLL TT.XXX

		STANDARD				
	Type	Watts 75/65	Watts 55/45	Kr. st. colour	Kr. other	
L	H 020					
050	10	271	129	2048	2895	
	15	483	231	2430	3278	
060	10	325	155	2168	3023	
	15	580	278	2580	3435	
070	10	379	180	2370	3225	
	15	676	324	2843	3690	
080	10	433	206	2535	3383	
	15	773	370	3053	3900	
090	10	487	232	2655	3503	
	15	869	416	3210	4065	
100	10	541	258	2843	4185	
	15	966	463	3450	4793	
110	10	595	283	2963	4313	
	15	1063	509	3608	4958	
120	10	649	309	3315	4658	
	15	1159	555	4020	5370	
140	10	757	360	3585	4935	
	15	1352	648	4373	5723	
160	10	866	412	4215	5565	
	15	1546	741	5168	6510	
180	10	974	464	4583	5933	
	15	1739	833	5603	6945	
200	10	1082	515	4965	7313	
	15	1932	925	6308	8663	
220	10	1190	567	5798	8145	
	15	2125	1018	7320	9675	
240	10	1298	618	6353	8700	
	15	2318	1110	8010	10358	
260	10	1407	670	6735	9090	
	15	2512	1203	8483	10830	
280	10	1515	721	7058	9405	
	15	2705	1296	8910	11258	

		STANDARD				
	Type	Watts 75/65	Watts 55/45	Kr. st. colour	Kr. other	
H 035	10	392	188	2273	3120	
	15	673	327	2648	3495	
10	10	470	226	2423	3270	
	15	808	392	2835	3683	
10	10	548	263	2633	3480	
	15	942	457	3120	3968	
10	10	626	301	2820	3668	
	15	1077	523	3330	4178	
10	10	705	339	2978	3825	
	15	1211	588	3555	4403	
10	10	783	376	3180	4530	
	15	1346	653	3803	5153	
10	10	861	414	3315	4658	
	15	1481	719	3998	5348	
10	10	940	451	3705	5048	
	15	1615	784	4410	5760	
10	10	1096	526	4020	5370	
	15	1884	915	4823	6173	
10	10	1253	602	4733	6075	
	15	2154	1046	5670	7020	
10	10	1409	677	5130	6473	
	15	2423	1176	6173	7515	
10	10	1566	752	5558	7905	
	15	2692	1307	6915	9270	
10	10	1723	828	6435	8783	
	15	2961	1438	7980	10335	
10	10	1879	902	7088	9435	
	15	3230	1568	8745	11093	
10	10	2036	978	7485	9833	
	15	3500	1699	9248	11595	
10	10	2192	1053	7868	10215	
	15	3769	1830	9735	12083	

		TWIN				
	Type	Watts 75/65	Watts 55/45	Kr. st. colour	Kr. other	
11	11	524	246	3143	3990	
	16	733	344	3698	4545	
11	11	629	296	3345	4193	
	16	879	412	3953	4800	
11	11	734	345	3690	4538	
	16	1026	481	4410	5258	
11	11	838	394	3923	4770	
	16	1172	550	4725	5573	
11	11	943	443	4163	5010	
	16	1319	619	5033	5880	
11	11	1048	493	4440	5790	
	16	1465	687	5423	6773	
11	11	1153	542	4650	6000	
	16	1612	756	5693	7043	
11	11	1258	592	5123	6465	
	16	1758	824	6248	7598	
11	11	1467	690	5565	6908	
	16	2051	962	6818	8160	
11	11	1677	789	6510	7860	
	16	2344	1099	8055	9398	
11	11	1886	887	7058	8408	
	16	2637	1237	8760	10110	
11	11	2096	986	7613	9960	
	16	2930	1374	9870	12218	
11	11	2306	1084	8790	11145	
	16	3223	1512	11400	13748	
11	11	2515	1183	9593	11948	
	16	3516	1649	12383	14730	
11	11	2725	1281	10148	12495	
	16	3809	1786	13103	15450	
11	11	2934	1380	10680	13035	
	16	4102	1924	13793	16148	

EN442 output at 20°C room temperature

MILTON
MEGATHERM

MILTON MEGATHERM A/S

Formervangen 14-16
DK - 2600 Glostrup

Tel: +45 4697 0000
Fax: +45 4697 0001

info@miltonmegatherm.dk
www.miltonmegatherm.dk

jaga
CLIMATE
DESIGNERS

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12
Fax: +32 (0)11 29 41 60
export@jaga.com

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in line
with our policy of continuous improvement and innovation.
All prices in DKK, exclude VAT. Prices valid from January 1, 2024.
Replaces all existing price lists.